
POWER

PTV12010

12 Vin single output

Data Sheet

Total power: 44 W
Input voltage: 12 V

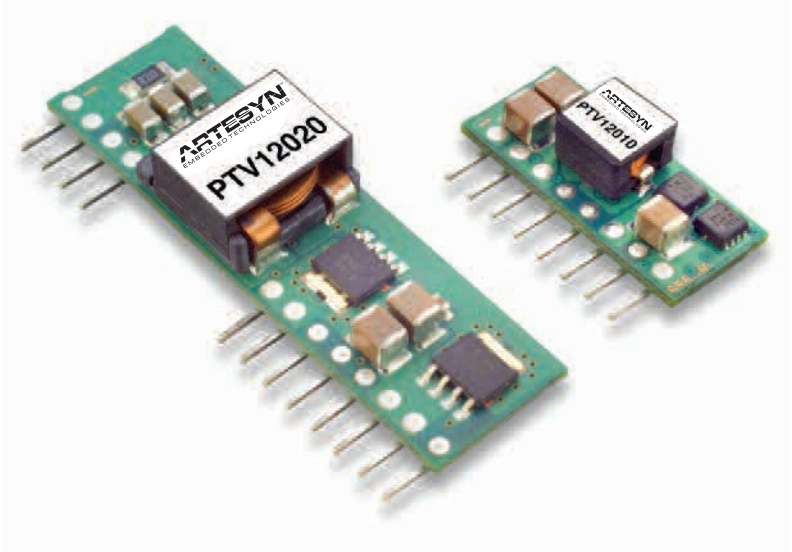

KEY FEATURES:

- 8 A output current
- 12 V input voltage
- Wide-output voltage adjust
  - 1.2 Vdc to 5.5 Vdc for suffix 'W' and 0.8 Vdc to 1.8 Vdc for suffix 'L'
- Auto-track™ sequencing
- Pre-bias start-up
- Efficiencies up to 93%
- Output ON/OFF inhibit
- Vertical through-hole mounting
- Point-of-Load-Alliance (POLA) compatible
- Undervoltage lockout
- Available RoHS compliant

Electrical Specifications		
Efficiency		See Tables on page 2
Insulation voltage		Non-isolated
Switching frequency Suffix 'W' Suffix 'L'	 250-400 kHz 200-300 kHz	 325 kHz typ. 250 kHz typ.
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions	(L x W x H)	22.86 x 8.38 x 10.16 mm 0.90 x 0.330 x 0.400 in
Weight		2.6 g (0.09 oz)
MTBF	Telcordia SR-332	5,000,000 hours

ARTESYN™
An Advanced Energy Company

Input		
Input voltage range	(See Note 3)	10.8 V-13.2 Vdc
Input standby current		10 mA typ.
Remote ON/OFF	(See Note 1)	Positive logic
Undervoltage lockout	(Increasing)	9.5 V typ.
Track input current	Pin 5 (See Notes 6 and 7)	-0.13 mA

Output		
Voltage adjustability (See Note 4)	Suffix 'W' Suffix 'L'	1.2-5.5 Vdc 0.8-1.8 Vdc
Setpoint accuracy	(See Note 8)	±2.0% Vo
Line regulation		±10 mV typ.
Load regulation		±12 mV typ.
Total regulation	(See Note 8)	±3.0% Vo
Minimum load		0 A
Ripple and noise 20 MHz bandwidth	Suffix 'W' Suffix 'L'	20 mV pk-pk 15 mV pk-pk
Temperature co-efficient	-40 ºC to +85 ºC	±0.5% Vo
Transient response (See Note 5)		70 µs recovery time Overshoot/undershoot 100 mV

EMC Characteristics	
Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3


ENVIRONMENTAL SPECIFICATIONS		
Thermal performance (See Note 2)	Operating ambient, temperature Non-operating	-40 ºC to +85 ºC -40 ºC to +125 ºC

PROTECTION		
Overcurrent	Auto reset	16 A typ.

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.) [2]	EFFICIENCY (MAX.)	REGULATION		MODEL NUMBER
						LINE	LOAD	
15 W	10.8-13.2 Vdc	0.8-1.8 Vdc	0 A	8 A	87%	±10 mV	±12 mV	PTV12010L
44 W	10.8-13.2 Vdc	1.2-5.5 Vdc	0 A	8 A	92%	±10 mV	±12 mV	PTV12010W

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated C_{in} = 100 µF and 10 µF (Ceramic), C_{out} = 0 µF

Part Number System with Options

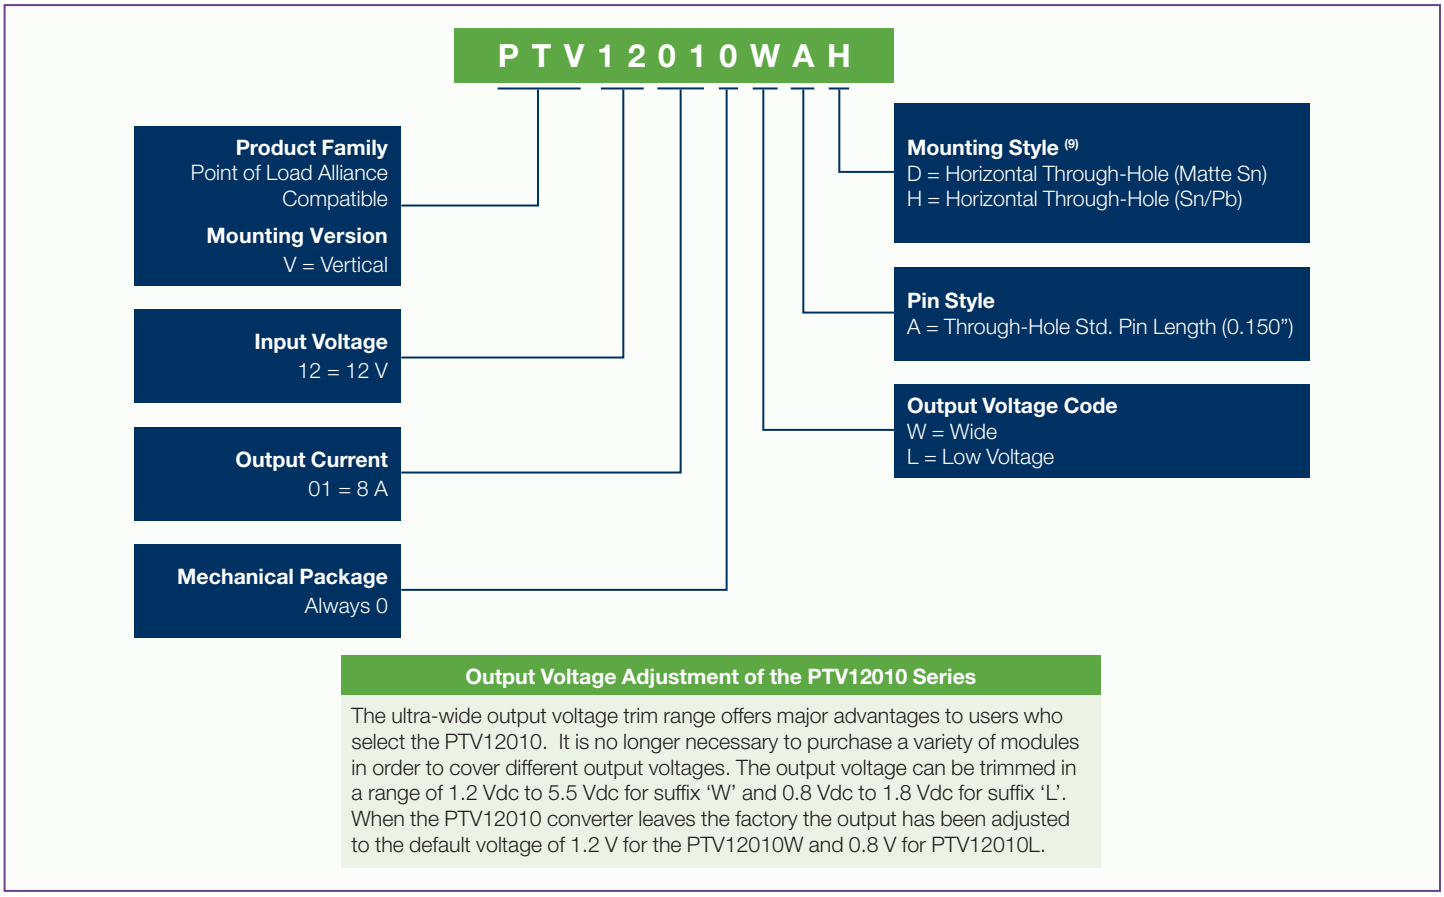

Output Voltage Adjustment of the PTV12010 Series

The ultra-wide output voltage trim range offers major advantages to users who select the PTV12010. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 1.2 Vdc to 5.5 Vdc for suffix 'W' and 0.8 Vdc to 1.8 Vdc for suffix 'L'. When the PTV12010 converter leaves the factory the output has been adjusted to the default voltage of 1.2 V for the PTV12010W and 0.8 V for PTV12010L.

EFFICIENCY TABLE - PTV12010L ($I_O = I_{OMAX}$)	
OUTPUT VOLTAGE	**EFFICIENCY**
Vo = 1.8 V	87%
Vo = 1.5 V	86%
Vo = 1.2 V	84%
Vo = 1.0 V	81%
Vo = 0.8 V	78%

EFFICIENCY TABLE - PTV12010W ($I_O = I_{OMAX}$)	
OUTPUT VOLTAGE	**EFFICIENCY**
Vo = 5.0 V	92%
Vo = 3.3 V	90%
Vo = 2.5 V	88%
Vo = 1.8 V	85%
Vo = 1.5 V	83%
Vo = 1.2 V	80%

Notes

1 Remote ON/OFF. Positive logic
ON: Pin 7 open; or V > 2 V
OFF: Pin 7 GND; or V < 0.6 V

2 See Figures 1, 2, 3 and 6 for safe operating curves.

3 A 100 µF electrolytic input capacitor is required for proper operation as well as a 10 µF high-frequency ceramic capacitor. The electrolytic capacitor must be rated for the minimum rms of ripple current.

4 An external output capacitor is not required for basic operation. Adding 100 µF of distributed capacitance at the load will improve the transient response.

5 1 A/µs load step, 50 to 100% I_{omax}, C3 = 100 µF.

6 If utilized Vout will track applied voltage by ±0.3 V (up to Vo set point).

7 The pre-bias start-up feature is not compatible with Auto-Track™. This is because when the module is under Auto-Track™ control, it is fully active and will sink current if the output voltage is below that of a back-feeding source. Therefore to ensure a pre-bias hold-off, one of the following two techniques must be followed when input power is first applied to the module. The Auto-Track™ function must either be disabled, or the module's output held off using the Inhibit pin. Refer to Application Note 196 for more details.

8 The set-point voltage tolerance is affected by the tolerance and stability of R_{set}. The stated limit is unconditionally met if R_{set} has a tolerance of 1% with 100/ºC or better temperature stability.

9 To order Pb-free (RoHS compatible) through-hole parts replace the mounting option 'H' with 'D', e.g. PTV12010WAD.

10 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at http://www.artesyn.com/powergroup/products.htm to find a suitable alternative.

PTV12010W CHARACTERISTIC DATA

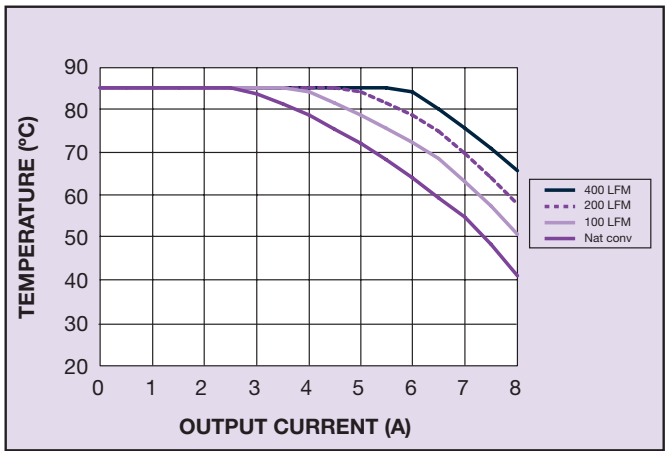


Figure 1 - Safe Operating Area
Vin = 12 V, Output Voltage = 5 V (See Note A)

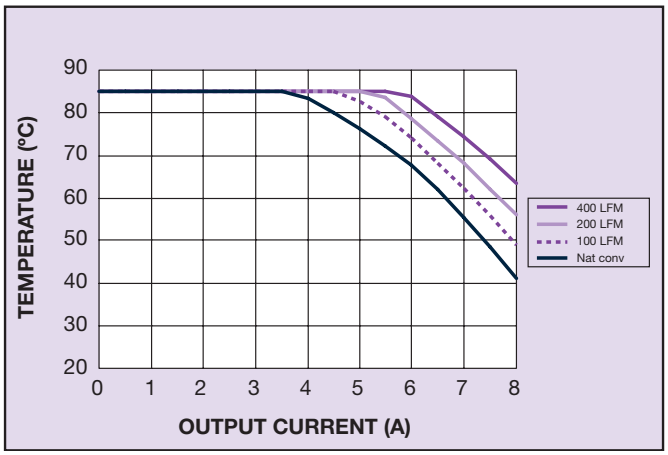


Figure 2 - Safe Operating Area
Vin = 12 V, Output Voltage = 3.3 V (See Note A)

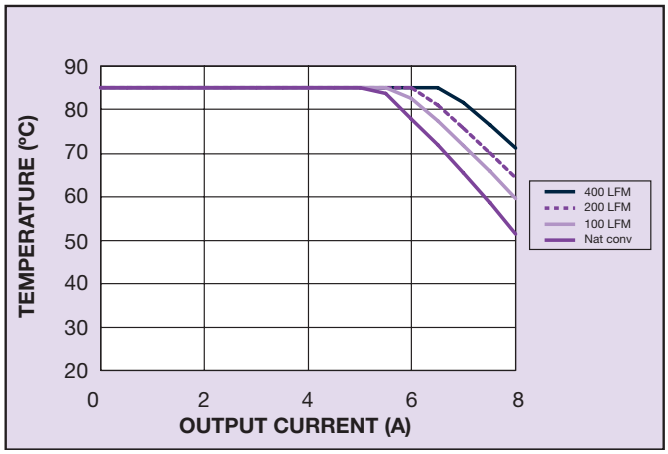


Figure 3 - Safe Operating Area
Vin = 12 V, Output Voltage = 1.8 V (See Note A)

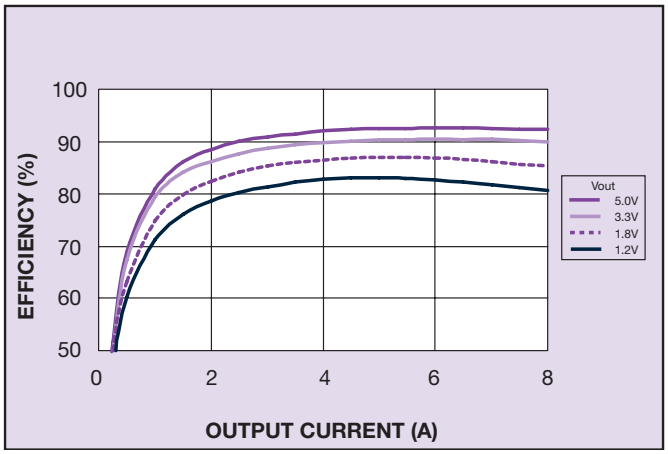


Figure 4 - Efficiency vs Load Current
Vin = 12 V (See Note B)

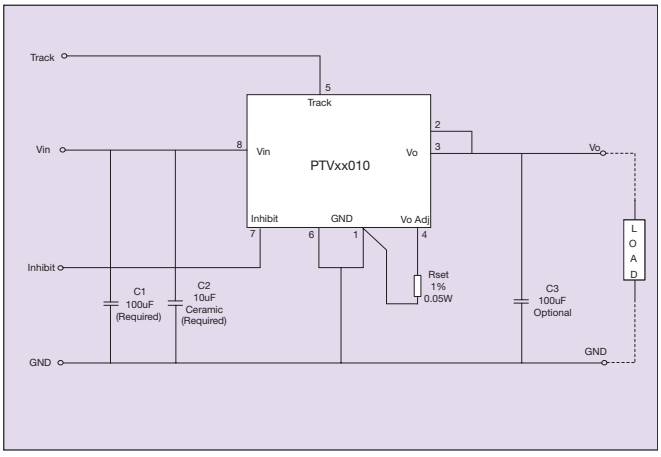


Figure 5 - Standard Application

Notes

1. SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
2. Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

PTV12010L CHARACTERISTIC DATA

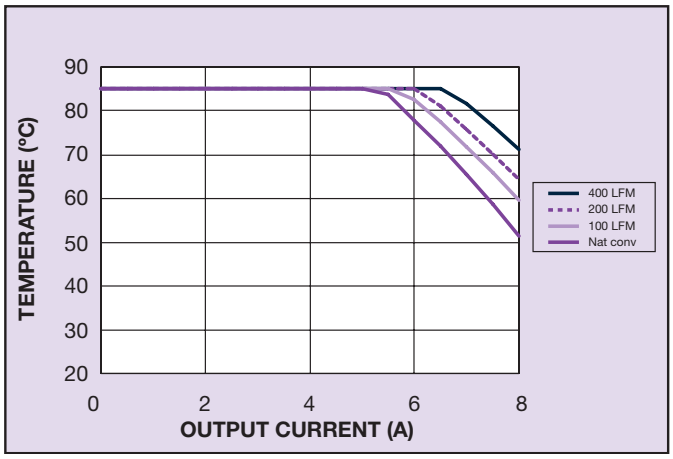


Figure 6 - Safe Operating Area
Vin = 12 V, Output Voltage 1.8 V (See Note A)

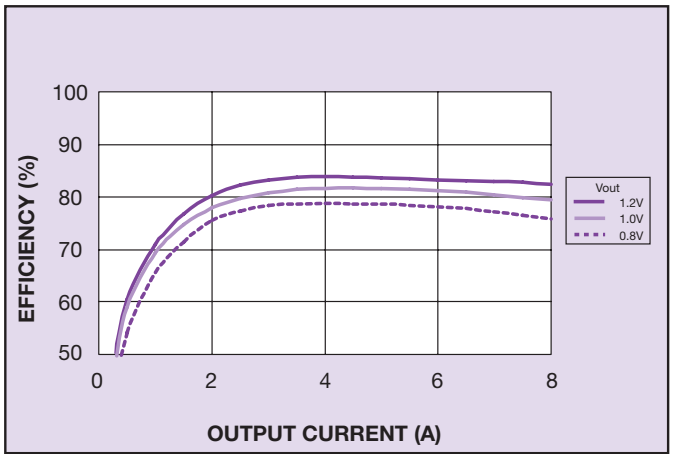


Figure 7 - Efficiency vs Load Current
Vin = 12 V (See Note B)


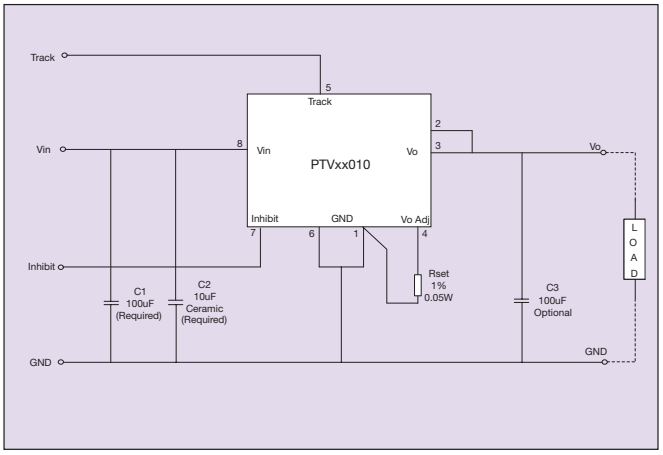


Figure 8 - Standard Application

Notes

1. SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
2. Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

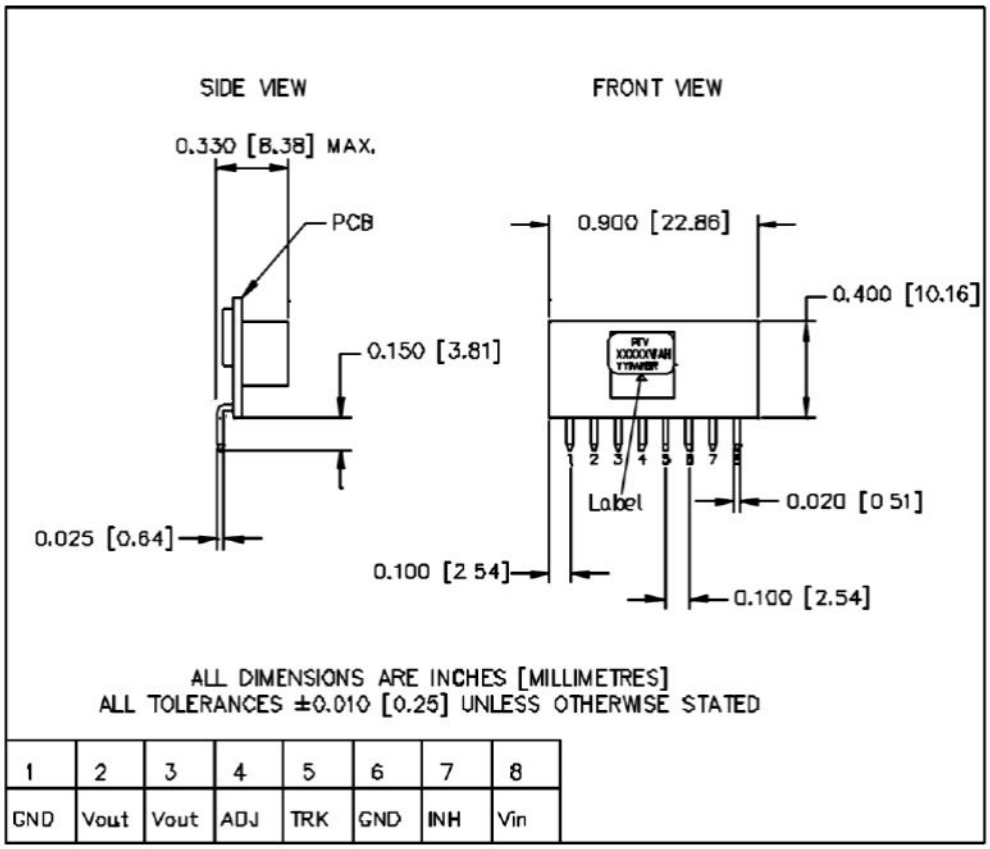

PIN CONNECTIONS	
PIN NO.	**FUNCTION**
1	Ground
2	Vout
3	Vout
4	Vo Adjust
5	Track
6	Ground
7	Inhibit
8	Vin

Figure 9 - Mechanical Drawing and Pinout Table

WORLDWIDE OFFICES

Americas
2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)
Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)
14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN™
An Advanced Energy Company
www.artesyn.com

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.