# KSZ9131MNX

## Gigabit Ethernet Transceiver with GMII/MII Support

### Features

- Single-Chip 10/100/1000 Mbps Ethernet Transceiver Suitable for IEEE 802.3 Applications
- GMII/MII Standard Interface with 3.3V/2.5V/1.8V Tolerant I/Os
- Auto-Negotiation to Automatically Select the Highest Link-Up Speed (10/100/1000 Mbps) and Duplex (Half/Full)
- On-Chip Termination Resistors for the Differential Pairs
- On-Chip LDO Controller to Support Single 3.3V Supply Operation
- Jumbo Frame Support Up to 16 KB
- 125 MHz Reference Clock Output
- Energy-Detect Power-Down Mode for Reduced Power Consumption When Cable is Not Attached
- Energy Efficient Ethernet (EEE) Support with Low-Power Idle (LPI) Mode and Clock Stoppable for 100BASE-TX/1000BASE-T and Transmit Amplitude Reduction with 10BASE-Te Option
- Wake-On-LAN (WOL) Support with Robust Custom-Packet Detection
- Programmable LED Outputs for Link, Activity, and Speed
- Baseline Wander Correction
- Quiet-WIRE® EMI Reduction (100BASE-TX)
- LinkMD® TDR-based Cable Diagnostic to Identify Faulty Copper Cabling
- Signal Quality Indication
- Parametric NAND Tree Support to Detect Faults Between Chip I/Os and Board
- Loopback Modes for Diagnostics
- Automatic MDI/MDI-X Crossover to Detect and Correct Pair Swap at All Speeds of Operation
- Automatic Detection and Correction of Pair Swaps, Pair Skew, and Pair Polarity
- MDC/MDIO Management Interface for PHY Register Configuration
- Interrupt Pin Option
- Power-Down and Power-Saving Modes
- Operating Voltages
  - Core (DVDDL, AVDDL, AVDDL_PLL): 1.2V (External FET or Regulator)
  - VDD I/O (DVDDH): 3.3V, 2.5V, or 1.8V
  - Transceiver (AVDDH): 3.3V or 2.5V
- 64-pin QFN (8 mm × 8 mm) Package

### Target Applications

- Laser/Network Printer
- Network Attached Storage (NAS)
- Network Server
- Broadband Gateway
- Gigabit SOHO/SMB Router
- IPTV
- IP Set-Top Box
- Game Console
- IP Camera
- Triple-Play (Data, Voice, Video) Media Center
- Media Converter

© 2018-2021 Microchip Technology Inc.

## TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at **docerrors@microchip.com**. We welcome your feedback.

### Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

**http://www.microchip.com**

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

### Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; http://www.microchip.com
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include -literature number) you are using.

### Customer Notification System

Register on our web site at **www.microchip.com** to receive the most current information on all of our products.


© 2018-2021 Microchip Technology Inc.

## Table of Contents

1.0 Preface ..... 4
2.0 Introduction ..... 8
3.0 Pin Descriptions and Configuration ..... 9
4.0 Functional Description ..... 19
5.0 Register Descriptions ..... 47
6.0 Operational Characteristics ..... 116
7.0 Package Outline ..... 140
Appendix A: Data Sheet Revision History ..... 141
The Microchip Web Site ..... 143
Customer Change Notification Service ..... 143
Customer Support ..... 143
Product Identification System ..... 144

# 1.0 PREFACE

## 1.1 General Terms

**TABLE 1-1: GENERAL TERMS**

| Term | Description |
|---|---|
| **1000BASE-T** | 1 Gbps Ethernet over twisted pair, IEEE 802.3 compliant |
| **100BASE-TX** | 100 Mbps Ethernet over twisted pair, IEEE 802.3 compliant |
| **10BASE-T** | 10 Mbps Ethernet over twisted pair, IEEE 802.3 compliant |
| **ADC** | Analog-to-Digital Converter |
| **AFE** | Analog Front End |
| **AN, ANEG** | Auto-Negotiation |
| **AOAC** | Always on Always Connected |
| **ARP** | Address Resolution Protocol |
| **BELT** | Best Effort Latency Tolerance |
| **BYTE** | 8-bits |
| **CSMA/CD** | Carrier Sense Multiple Access/Collision Detect |
| **CSR** | Control and Status Register |
| **DA** | Destination Address |
| **DCQ** | Dynamic Channel Quality |
| **DWORD** | 32-bits |
| **EC** | Embedded Controller |
| **EEE** | Energy Efficient Ethernet |
| **FCS** | Frame Check Sequence |
| **FIFO** | First In First Out buffer |
| **FSM** | Finite State Machine |
| **FW** | Firmware |
| **GMII** | Gigabit Media Independent Interface |
| **GPIO** | General Purpose I/O |
| **HOST** | External system (Includes processor, application software, etc.) |
| **HW** | Hardware. Refers to function implemented by digital logic. |
| **IGMP** | Internet Group Management Protocol |
| **LDO** | Linear Drop-Out Regulator |
| **Level-Triggered Sticky Bit** | This type of status bit is set whenever the condition that it represents is asserted. The bit remains set until the condition is no longer true, and the status bit is cleared by writing a zero. |
| **LFSR** | Linear Feedback Shift Register |
| **LPM** | Link Power Management |
| **lsb** | Least Significant Bit |


© 2018-2021 Microchip Technology Inc.

**TABLE 1-1: GENERAL TERMS (CONTINUED)**

| Term | Description |
|---|---|
| **LSB** | Least Significant Byte |
| **LTM** | Latency Tolerance Messaging |
| **MAC** | Media Access Controller |
| **MDI** | Medium Dependent Interface |
| **MDIX** | Media Independent Interface with Crossover |
| **MEF** | Multiple Ethernet Frames |
| **MII** | Media Independent Interface |
| **MLT-3** | Multi-Level Transmission Encoding (3-Levels). A tri-level encoding method where a change in the logic level represents a code bit “1” and the logic output remaining at the same level represents a code bit “0”. |
| **MSI / MSI-X** | Message Signaled Interrupt |
| **N/A** | Not Applicable |
| **OTP** | One Time Programmable |
| **PCS** | Physical Coding Sublayer |
| **PLL** | Phase Locked Loop |
| **PMIC** | Power Management IC |
| **POR** | Power on Reset. |
| **PTP** | Precision Time Protocol |
| **QWORD** | 64-bits |
| **RESERVED** | Refers to a reserved bit field or address. Unless otherwise noted, reserved bits must always be zero for write operations. Unless otherwise noted, values are not guaranteed when reading reserved bits. Unless otherwise noted, do not read or write to reserved addresses. |
| **RMON** | Remote Monitoring |
| **SA** | Source Address |
| **SCSR** | System Control and Status Registers |
| **SEF** | Single Ethernet Frame |
| **SFD** | Start of Frame Delimiter - The 8-bit value indicating the end of the preamble of an Ethernet frame |
| **SMNP** | Simple Network Management Protocol |
| **SQI** | Signal Quality Indicator |
| **UDP** | User Datagram Protocol - A connectionless protocol run on top of IP networks |
| **WORD** | 16-bits |

## 1.2 Buffer Types

**TABLE 1-2: BUFFER TYPE DESCRIPTIONS**

| BUFFER | DESCRIPTION |
|---|---|
| AI | AI Analog input |
| AO | AI Analog output |
| AIO | AIO Analog bidirectional |
| ICLK | ICLK Crystal oscillator input pin |
| OCLK | OCLK Crystal oscillator output pin |
| VI | Variable voltage input |
| VIS | Variable voltage Schmitt-triggered input |
| VO8 | Variable voltage output with 8 mA sink and 8 mA source |
| VOD8 | Variable voltage open-drain output with 8 mA sink |
| VO24 | Variable voltage output with 24 mA sink and 24 mA source |
| PU | 44/59/96 KΩ (typical @3.3/2.5/1.8V) internal pull-up. Unless otherwise noted in the pin description, internal pull-ups are always enabled.<br>**Note:** Internal pull-up resistors prevent unconnected inputs from floating. Do not rely on internal resistors to drive signals external to the device. When connected to a load that must be pulled high, an external resistor must be added. |
| PD | 47/58/86 KΩ (typical @3.3/2.5/1.8V) internal pull-down. Unless otherwise noted in the pin description, internal pull-downs are always enabled.<br>**Note:** Internal pull-down resistors prevent unconnected inputs from floating. Do not rely on internal resistors to drive signals external to the device. When connected to a load that must be pulled low, an external resistor must be added. |
| P | Power pin |

**Note:** Digital signals are not 5V tolerant unless specified.

**Note:** Sink and source capabilities are dependent on the supplied voltage.


© 2018-2021 Microchip Technology Inc.

## 1.3 Register Bit Types

Table 1-3 describes the register but attributes used throughout this document.

**TABLE 1-3: REGISTER BIT TYPES**

| Register Bit Type Notation | Register Bit Description |
|---|---|
| R | **Read:** A register or bit with this attribute can be read. |
| W | **Write:** A register or bit with this attribute can be written. |
| RO | **Read only:** Read only. Writes have no effect. |
| WO | **Write only:** If a register or bit is write-only, reads will return unspecified data. |
| W1S | **Write One to Set:** Writing a one sets the value. Writing a zero has no effect. |
| W1C | **Write One to Clear:** Writing a one clears the value. Writing a zero has no effect. |
| WAC | **Write Anything to Clear:** Writing anything clears the value. |
| RC | **Read to Clear:** Contents is cleared after the read. Writes have no effect. |
| LL | **Latch Low:** Clear on read of register. |
| LH | **Latch High:** Clear on read of register. |
| SC | **Self-Clearing:** Contents is self-cleared after being set. Writes of zero have no effect. Contents can be read. |
| SS | **Self-Setting:** Contents is self-setting after being cleared. Writes of one have no effect. Contents can be read. |
| RO/LH | **Read Only, Latch High:** This mode is used by the Ethernet PHY registers. Bits with this attribute will stay high until the bit is read. After it a read, the bit will remain high, but will change to low if the condition that caused the bit to go high is removed. If the bit has not been read the bit will remain high regardless of if its cause has been removed. |
| NASR | **Not Affected by Software Reset.** The state of NASR bits does not change on assertion of a software reset. |
| STKY | This field is “Sticky” in that it is neither initialized nor modified by hot reset or Function Level Reset. |
| RESERVED | **Reserved Field:** Reserved fields must be written with zeros, unless otherwise indicated, to ensure future compatibility. The value of reserved bits is not guaranteed on a read. |

Many of these register bit notations can be combined. Come examples of this are:

- **R/W**: Can be written. Will return current setting on a read.
- **R/WAC**: Will return current setting on a read. Writing anything clears the bit.

## 1.4 Reference Documents

1. *IEEE 802.3™-2015 IEEE Standard for Ethernet,*
   http://standards.ieee.org/about/get/802/802.3.html
2. *IEEE 802.3bw™-2015 IEEE Standard for Ethernet Amendment 1,*
   https://standards.ieee.org/findstds/standard/802.3bw-2015.html
3. *OPEN Alliance TC1 - Advanced diagnostics features for 100BASE-T1 automotive Ethernet PHYs Version 1.0*
   http://www.opensig.org/download/document/218/Advanced_PHY_features_for_automotive_Ethernet_V1.0.pdf

# 2.0 INTRODUCTION

## 2.1 General Description

The KSZ9131MNX is a completely integrated triple-speed (10BASE-T/100BASE-TX/1000BASE-T) Ethernet physical-layer transceiver for transmission and reception of data on standard CAT-5 as well as CAT-5e and CAT-6 unshielded twisted pair (UTP) cables.


The KSZ9131MNX offers the industry-standard GMII/MII (Gigabit Media Independent Interface/Media Independent Interface) for connection to GMII/MII MACs in Gigabit Ethernet processors and switches for data transfer at 1000 Mbps or 10/100 Mbps.

The KSZ9131MNX reduces board cost and simplifies board layout by using on-chip termination resistors for the four differential pairs and by integrating an LDO controller to drive a low-cost MOSFET to supply the 1.2V core.

The KSZ9131MNX offers diagnostic features to facilitate system bring-up and debugging in production testing and in product deployment. Parametric NAND tree support enables fault detection between KSZ9131MNX I/Os and the board. The LinkMD® TDR-based cable diagnostic identifies faulty copper cabling. Remote, external, and local loopback functions verify analog and digital data paths.

The KSZ9131MNX is available in a 64-pin, RoHS Compliant QFN package.

**FIGURE 2-1: SYSTEM BLOCK DIAGRAM**

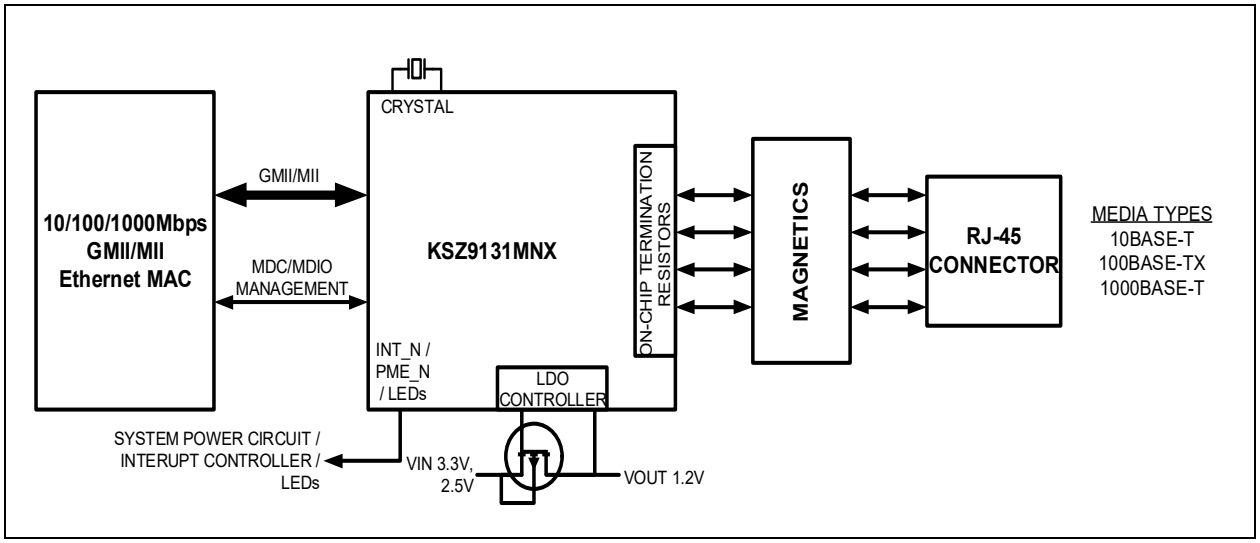




© 2018-2021 Microchip Technology Inc.

## 3.0 PIN DESCRIPTIONS AND CONFIGURATION

### 3.1 Pin Assignments

**FIGURE 3-1: PIN ASSIGNMENTS (TOP VIEW)**

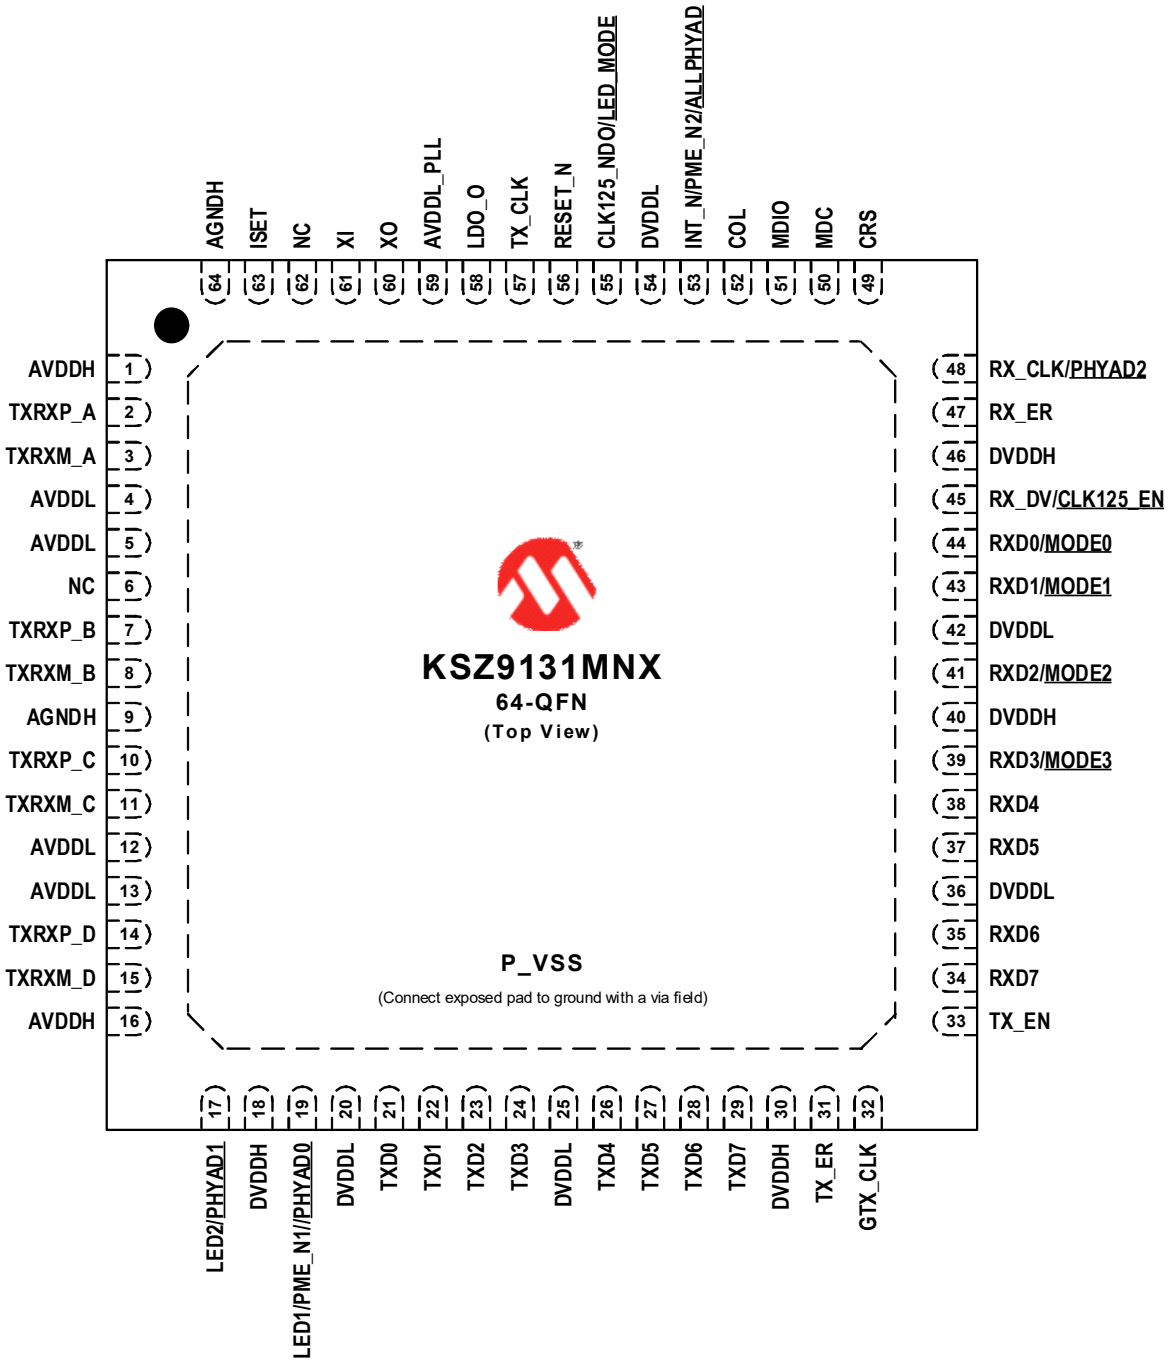


**Note:** Exposed pad (P_VSS) on bottom of package must be connected to ground with a via field.

**Note:** Configuration strap inputs are indicated with an underline.

**TABLE 3-1: KSZ9131MNX PIN ASSIGNMENTS**

| Pin Num | Pin Name | Pin Num | Pin Name |
|---|---|---|---|
| 1 | AVDDH | 33 | TX_EN |
| 2 | TXRXP_A | 34 | RXD7 |
| 3 | TXRXM_A | 35 | RXD6 |
| 4 | AVDDL | 36 | DVDDL |
| 5 | AVDDL | 37 | RXD5 |
| 6 | NC | 38 | RXD4 |
| 7 | TXRXP_B | 39 | RXD3/MODE3 |
| 8 | TXRXM_B | 40 | DVDDH |
| 9 | AGNDH | 41 | RXD2/MODE2 |
| 10 | TXRXP_C | 42 | DVDDL |
| 11 | TXRXM_C | 43 | RXD1/MODE1 |
| 12 | AVDDL | 44 | RXD0/MODE0 |
| 13 | AVDDL | 45 | RX_DV/CLK125_EN |
| 14 | TXRXP_D | 46 | DVDDH |
| 15 | TXRXM_D | 47 | RX_ER |
| 16 | AVDDH | 48 | RX_CLK/PHYAD2 |
| 17 | LED2/PHYAD1 | 49 | CRS |
| 18 | DVDDH | 50 | MDC |
| 19 | LED1/PME_N1/PHYAD0 | 51 | MDIO |
| 20 | DVDDL | 52 | COL |
| 21 | TXD0 | 53 | INT_N/PME_N2/ALLPHYAD |
| 22 | TXD1 | 54 | DVDDL |
| 23 | TXD2 | 55 | CLK125_NDO/LED_MODE |
| 24 | TXD3 | 56 | RESET_N |
| 25 | DVDDL | 57 | TX_CLK |
| 26 | TXD4 | 58 | LDO_O |
| 27 | TXD5 | 59 | AVDDL_PLL |
| 28 | TXD6 | 60 | XO |
| 29 | TXD7 | 61 | XI |
| 30 | DVDDH | 62 | NC |
| 31 | TX_ER | 63 | ISET |
| 32 | GTX_CLK | 64 | AGNDH |
| Exposed Pad (P_VSS) must be connected to ground. | | | |


© 2018-2021 Microchip Technology Inc.

## 3.2 Pin Descriptions

This section contains descriptions of the various KSZ9131MNX pins. The "_N" symbol in the signal name indicates that the active, or asserted, state occurs when the signal is at a low voltage level. For example, **RESET_N** indicates that the reset signal is active low. When "_N" is not present after the signal name, the signal is asserted when at the high voltage level.

The pin function descriptions have been broken into functional groups as follows:

- Analog Front End
- GMII Interface
- Crystal
- Miscellaneous
- Strap Inputs
- I/O Power, Core Power and Ground

**TABLE 3-2: ANALOG FRONT END**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| Ethernet TX/RX Positive Channel A | TXRXP_A | AIO | Media Dependent Interface[0], positive signal of differential pair<br><br>1000BT mode: TXRXP_A corresponds to BI_DA+.<br><br>10BT/100BT mode: TXRXP_A is the positive transmit signal (TX+) for MDI configuration and the positive receive signal (RX+) for MDI-X configuration, respectively. |
| Ethernet TX/RX Negative Channel A | TXRXM_A | AIO | Media Dependent Interface[0], negative signal of differential pair<br><br>1000BT mode: TXRXM_A corresponds to BI_DA-.<br><br>10BT/100BT-TX mode: TXRXM_A is the negative transmit signal (TX-) for MDI configuration and the negative receive signal (RX-) for MDI-X configuration, respectively. |
| Ethernet TX/RX Positive Channel B | TXRXP_B | AIO | Media Dependent Interface[1], positive signal of differential pair<br><br>1000BT mode: TXRXP_B corresponds to BI_DB+.<br><br>10BT/100BT mode: TXRXP_B is the positive receive signal (RX+) for MDI configuration and the positive transmit signal (TX+) for MDI-X configuration, respectively. |
| Ethernet TX/RX Negative Channel B | TXRXM_B | AIO | Media Dependent Interface[1], negative signal of differential pair<br><br>1000BT mode: TXRXM_B corresponds to BI_DB-.<br><br>10BT/100BT mode: TXRXP_B is the negative receive signal (RX-) for MDI configuration and the negative transmit signal (TX-) for MDI-X configuration, respectively. |
| Ethernet TX/RX Positive Channel C | TXRXP_C | AIO | Media Dependent Interface[2], positive signal of differential pair<br><br>1000BT mode: TXRXP_C corresponds to BI_DC+.<br><br>10BT/100BT mode: TXRXP_C is not used. |

**TABLE 3-2: ANALOG FRONT END (CONTINUED)**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| Ethernet TX/RX Negative Channel C | TXRXM_C | AIO | Media Dependent Interface[2], negative signal of differential pair<br><br>1000BT mode: TXRXM_C corresponds to BI_DC-.<br><br>10BT/100BT mode: TXRXM_C is not used. |
| Ethernet TX/RX Positive Channel D | TXRXP_D | AIO | Media Dependent Interface[3], positive signal of differential pair<br><br>1000BT mode: TXRXP_D corresponds to BI_DD+.<br><br>10BT/100BT mode: TXRXP_D is not used. |
| Ethernet TX/RX Negative Channel D | TXRXM_D | AIO | Media Dependent Interface[3], negative signal of differential pair<br><br>1000BT mode: TXRXM_D corresponds to BI_DD-.<br><br>10BT/100BT mode: TXRXM_D is not used. |

**TABLE 3-3: GMII INTERFACE**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| Transmit Data | TXD7<br>TXD6<br>TXD5<br>TXD4<br>TXD3<br>TXD2<br>TXD1<br>TXD0 | VI<br>(PD) | The MAC transmits data to the PHY using these signals.<br>**Note:** Bits 7-4 are not used in MII mode and if not driven, require external pull-down resistors. |
| Transmit Enable | TX_EN | VI | Indicates the presence of valid data on TXD[7:0]. |
| Transmit Error | TX_ER | VI<br>(PD) | Indicates a transmit error condition during frame transmission.<br><br>Also used to request Low Power Idle for Energy Efficient Ethernet operation.<br>**Note:** If the GMII/MII MAC does not provide the TX_ER output signal, this pin should be tied low. |
| GMII Transmit Clock | GTX_CLK | VI | GMII transmit reference clock.<br>**Note:** This signal is not used in MII mode and if not driven, requires an external pull-down resistor. |
| MII Transmit Clock | TX_CLK | VO24 | MII transmit reference clock.<br>**Note:** This signal is not used in GMII mode. |
| Collision Detect | COL | VO24 | Asserted to indicate detection of a collision condition.<br>**Note:** Used in half-duplex mode only. |
| Carrier Sense | CRS | VO24 | Indicates detection of carrier.<br>**Note:** Used in half-duplex mode only. |


© 2018-2021 Microchip Technology Inc.

**TABLE 3-3: GMII INTERFACE (CONTINUED)**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| Receive Data | RXD7<br>RXD6<br>RXD5<br>RXD4<br>RXD3<br>RXD2<br>RXD1<br>RXD0 | VO24 | The PHY transfers data to the MAC using these signals.<br>**Note:** Bits 7-4 are not used in MII mode and are driven low. |
| Receive Data Valid | RX_DV | VO24 | Indicates that recovered and decoded data is being presented on the receive data pins. |
| Receive Error | RX_ER | VO24 | Asserted to indicate an error has been detected in the frame presently being transferred from the PHY.<br><br>Also used to indicate Low Power Idle for Energy Efficient Ethernet operation. |
| Receive Clock | RX_CLK | VO24 | Receive reference clock. |

**TABLE 3-4: CRYSTAL**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| Crystal Input | XI | ICLK | When using a 25MHz crystal, this input is connected to one lead of the crystal.<br><br>When using an clock source, this is the input from the oscillator.<br>**Note:** The crystal or oscillator should have a tolerance of ±50ppm. |
| Crystal Output | XO | OCLK | When using a 25MHz crystal, this output is connected to one lead of the crystal.<br><br>When using an external oscillator, this pin is not connected. |

**TABLE 3-5: MISCELLANEOUS**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| Indicator LEDs | LED2<br>LED1 | VO8 | Programmable LED outputs. |
| Management Interface Data | MDIO | VIS/<br>VO8<br>VOD8<br>(PU) | This is the management data from/to the MAC.<br>**Note:** An external pull-up resistor to DVDDH in the range of 1.0 kΩ to 4.7 kΩ is required. |
| Management Interface Clock | MDC | VIS<br>(PU) | This is the management clock input from the MAC. |
| Power Management Event | PME_N2<br>PME_N1 | VO8 | Programmable PME_N output.<br><br>When asserted low, this pin signals that a WOL event has occurred.<br><br>PME_N can be mapped to either (or both) pins. |
| PHY Interrupt | INT_N | VO8 | Programmable interrupt output. |
| CLK125 MHz | CLK125_NDO | VO24 | 125 MHz clock output.<br>This pin provides a 125 MHz reference clock output option for use by the MAC.<br><br>This pin may also provide a 125 MHz clock output synchronous to the receive data for use in Synchronous Ethernet (SyncE) applications. |
| System Reset | RESET_N | VIS<br>(PU) | Chip reset (active low).<br><br>Hardware pin configurations are strapped-in at the de-assertion (rising edge) of RESET_N. See the Strap Inputs section for details. |
| LDO Controller Output | LDO_O | AO | On-chip 1.2V LDO controller output.<br><br>This pin drives the input gate of a P-channel MOSFET to generate 1.2V for the chip's core voltages.<br>**Note:** If the system provides 1.2V, this pin is not used and can be left unconnected. |
| PHY Bias Resistor | ISET | AI | This pin should be connect to ground through a 6.04KΩ 1% resistor.<br><br>**APPLICATION NOTE:** The resistor value is different from the 12.1KΩ used on the KSZ9031. |
| No Connect | NC | - | For normal operation, these pins should be left unconnected.<br>**Note:** Pin 62 is not bonded and can be connected to AVDDH power for footprint compatibility with older generation devices. |


© 2018-2021 Microchip Technology Inc.

**TABLE 3-6: STRAP INPUTS**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| PHY Address | PHYAD2<br>PHYAD1<br>PHYAD0 | VI | The PHY address, PHYAD[2:0], is sampled and latched at power-up/reset and is configurable to any value from 0 to 7. Each PHY address bit is configured as follows:<br>Pulled-up = 1<br>Pulled-down = 0<br><br>PHY Address Bits [4:3] are always set to '00'. |
| All PHY Address Enable | ALLPHYAD | VI | The ALLPHYAD strap-in pin is sampled and latched at power-up/reset and are defined as follows:<br>0 = PHY will respond to PHY address 0 as well as it's assigned PHY address<br>1= PHY will respond to only it's assigned PHY address<br>**Note:** This strap input is inverted compared to the All-PHYAD Enable register bit. |
| Device Mode | MODE3<br>MODE2<br>MODE1<br>MODE0 | VI | **Note:** The MODE[3:0] strap-in pins are sampled and latched at power-up/reset and are defined in Section 3.3.1, "Device Mode Select" |
| 125MHz Output Clock Enable | CLK125_EN | VI | CLK125_EN is sampled and latched at power-up/reset and is defined as follows:<br>Pulled-up (1) = Enable 125 MHz clock output<br>Pulled-down (0) = Disable 125 MHz clock output<br><br>CLK125_NDO provides the 125 MHz reference clock output option for use by the MAC. |
| LED Mode | LED_MODE | VI | LED_MODE is sampled and latched at power-up/reset and is defined as follows:<br>Pulled-up (1) = Individual-LED mode<br>Pulled-down (0) = Tri-color-LED mode |

**TABLE 3-7: I/O POWER, CORE POWER AND GROUND**

| Name | Symbol | BUFFER TYPE | DESCRIPTION |
|---|---|---|---|
| +2.5/3.3V Analog Power Supply | AVDDH | P | +2.5/3.3V analog power supply $V_{DD}$ |
| +1.2V Analog Power Supply | AVDDL | P | +1.2V analog power supply $V_{DD}$ |
| +1.2V Analog PLL Power Supply | AVDDL_PLL | P | +1.2V analog PLL power supply $V_{DD}$ |
| +3.3/2.5/1.8V Variable I/O Power Supply Input | DVDDH | P | +3.3/2.5/1.8V variable I/O digital power supply $V_{DD_IO}$ |
| +1.2V Digital Core Power Supply Input | DVDDL | P | +1.2V digital core power supply input |
| Paddle Ground | P_VSS | GND | Common ground. This exposed paddle must be connected to the ground plane with a via array. |
| Analog Ground High | AGNDH | GND | Analog ground high |


© 2018-2021 Microchip Technology Inc.

## 3.3 Configuration Straps

Configuration straps allow various features of the device to be automatically configured to user defined values. Configuration straps are latched upon the release of pin reset (RESET_N). Configuration straps do not include internal resistors and require the use of external resistors.

**Note:**

- The system designer must ensure that configuration strap pins meet the timing requirements specified in Section 6.6.3, "Reset Pin Configuration Strap Timing". If configuration strap pins are not at the correct voltage level prior to being latched, the device may capture incorrect strap values.
- When externally pulling configuration straps high, the strap should be tied to DVDDH.

**APPLICATION NOTE:** All straps should be pulled-up or pulled-down externally on the PCB to enable the desired operational state.

### 3.3.1 DEVICE MODE SELECT

The MODE[3:0] configuration straps selects the device mode as follows:

**TABLE 3-8: DEVICE MODE SELECTIONS**

| Functional Modes | | | | | | | |
|---|---|---|---|---|---|---|---|
| MODE[3:0] | Mode | Pin 19 Function | Pin 53 Function | Auto-negotiation Advertisement | | | |
| | | | | 1000BT Full Duplex | 1000BT Half Duplex | 10/100BT Full Duplex | 10/100BT Half Duplex |
| 0000 | RESERVED | | | - | - | - | - |
| 0001 | GMII/MII | | | yes | no | yes | yes |
| 1000 | RESERVED | | | - | - | - | - |
| 1001 | GMII/MII | LED1 (PME_N1) | | no | no | yes | yes |
| 1010 | RESERVED | | | - | - | - | - |
| 1011 | GMII/MII | | INT_N (PME_N2) | no | no | yes | yes |
| 1100 | RESERVED | | | - | - | - | - |
| 1101 | RESERVED | | | - | - | - | - |
| 1110 | RESERVED | | | - | - | - | - |
| 1111 | RESERVED | | | - | - | - | - |
| **Test Modes** | | | | | | | |
| **MODE[3:0]** | **Mode** | | | | | | |
| 0010 | RESERVED | | | | | | |
| 0011 | RESERVED | | | | | | |
| 0100 | NAND tree mode | | | | | | |
| 0101 | RESERVED | | | | | | |
| 0110 | RESERVED | | | | | | |
| 0111 | Device power down mode | | | | | | |

### 3.3.2 PHY ADDRESS

The PHYAD2:0 configuration straps set the value of the PHY's management address. PHY Address Bits [4:3] are always set to '00'.

### 3.3.3 ALL PHYs ADDRESS

The ALLPHYAD configuration strap sets the default of the All-PHYAD Enable bit in the Common Control Register which enables or disables the PHY's ability to respond to PHY address 0 as well as it's assigned PHY address.

**Note:** This strap input is inverted compared to the register bit.

### 3.3.4 125MHZ OUTPUT CLOCK ENABLE

The CLK125_EN configuration strap enables the 125 MHz clock output onto the CLK125_NDO pin.
The output clock defaults to a locally generated 125MHz clock. The recovered 125MHz RX clock can be selected for use in Synchronous Ethernet (SyncE) applications.

### 3.3.5 LED MODE SELECT

The LED_MODE configuration strap selects between Individual-LED (1) or Tri-color-LED (0) modes. LED operation is described in Section 4.13, "LED Support".


© 2018-2021 Microchip Technology Inc.

## 4.0 FUNCTIONAL DESCRIPTION

The KSZ9131MNX is a completely integrated triple-speed (10BASE-T/100BASE-TX/1000BASE-T) Ethernet physical layer transceiver solution for transmission and reception of data over a standard CAT-5 unshielded twisted pair (UTP) cable.


The KSZ9131MNX reduces board cost and simplifies board layout by using on-chip termination resistors for the four differential pairs and by integrating an LDO controller to drive a low-cost MOSFET to supply the 1.2V core.

On the copper media interface, the KSZ9131MNX can automatically detect and correct for differential pair misplacements and polarity reversals, and correct propagation delays and re-sync timing between the four differential pairs, as specified in the IEEE 802.3 standard for 1000BASE-T operation.

The KSZ9131MNX provides the GMII/MII interface for connection to GMACs in Gigabit Ethernet processors and switches for data transfer at 10/100/1000Mbps.

Figure 4-1 shows a high-level block diagram of the KSZ9131MNX.

**FIGURE 4-1: KSZ9131MNX BLOCK DIAGRAM**

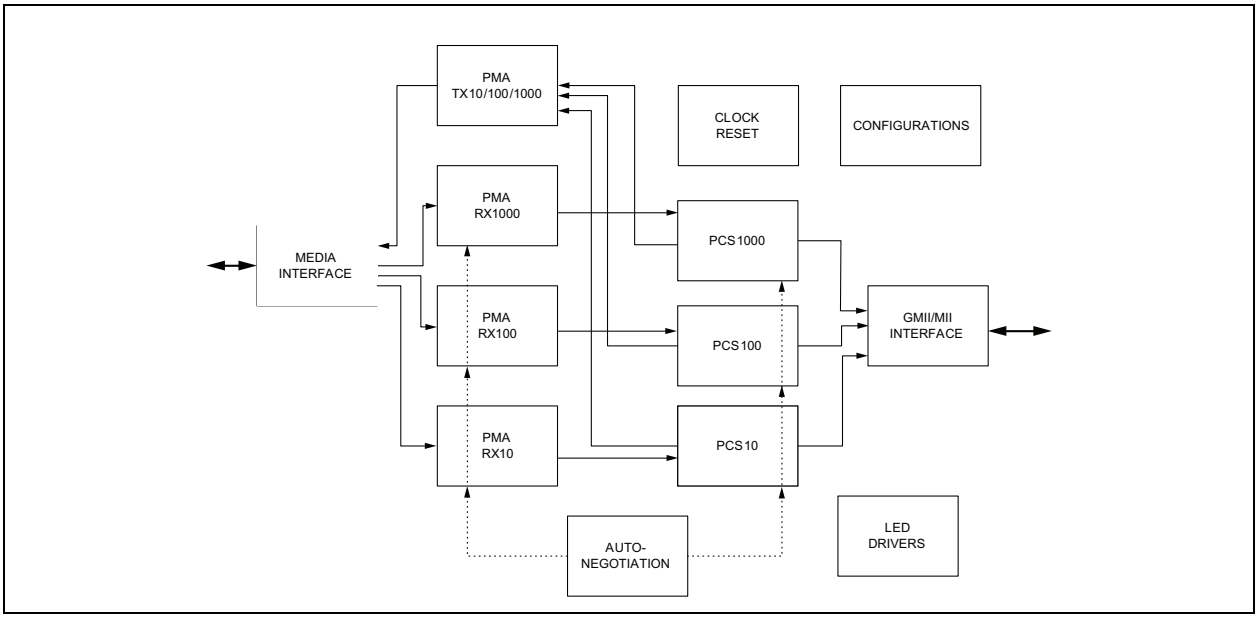


## 4.1 10BASE-T/100BASE-TX Transceiver

### 4.1.1 100BASE-TX TRANSMIT

The 100BASE-TX transmit function performs parallel-to-serial conversion, 4B/5B coding, scrambling, NRZ-to-NRZI conversion, and MLT-3 encoding and transmission.

The circuitry starts with a parallel-to-serial conversion, which converts the MII data from the MAC into a 125 MHz serial bit stream. The data and control stream is then converted into 4B/5B coding, followed by a scrambler. The serialized data is further converted from NRZ-to-NRZI format, and then transmitted in MLT-3 current output. The output current is set by an external 6.04 kΩ 1% resistor for the 1:1 transformer ratio.

The output signal has a typical rise/fall time of 4 ns and complies with the ANSI TP-PMD standard regarding amplitude balance, and overshoot. The wave-shaped 10BASE-T output is also incorporated into the 100BASE-TX transmitter.

### 4.1.2 100BASE-TX RECEIVE

The 100BASE-TX receiver function performs adaptive equalization, DC restoration, MLT-3-to-NRZI conversion, data and clock recovery, NRZI-to-NRZ conversion, de-scrambling, 4B/5B decoding, and serial-to-parallel conversion.

The receiving side starts with the equalization filter to compensate for inter-symbol interference (ISI) over the twisted pair cable. Because the amplitude loss and phase distortion are a function of the cable length, the equalizer must adjust its characteristics to optimize performance. In this design, the variable equalizer makes an initial estimation based on comparisons of incoming signal strength against some known cable characteristics, then tunes itself for optimization. This is an ongoing process and self-adjusts against environmental changes such as temperature variations.

Next, the equalized signal goes through a DC-restoration and data-conversion block. The DC-restoration circuit compensates for the effect of baseline wander and improves the dynamic range. The differential data conversion circuit converts the MLT-3 format back to NRZI. The slicing threshold is also adaptive.

The clock-recovery circuit extracts the 125 MHz clock from the edges of the NRZI signal. This recovered clock is then used to convert the NRZI signal into the NRZ format. This signal is sent through the de-scrambler followed by the 4B/5B decoder. Finally, the NRZ serial data is converted to the GMII/MII format and provided as the input data to the MAC.

### 4.1.3 SCRAMBLER/DE-SCRAMBLER (100BASE-TX ONLY)

The purpose of the scrambler is to spread the power spectrum of the signal to reduce electromagnetic interference (EMI) and baseline wander. Transmitted data is scrambled using an 11-bit wide linear feedback shift register (LFSR). The scrambler generates a 2047-bit non-repetitive sequence, then the receiver de-scrambles the incoming data stream using the same sequence as at the transmitter.

### 4.1.4 10BASE-T TRANSMIT

The 10BASE-T output drivers are incorporated into the 100BASE-TX drivers to allow for transmission with the same magnetic. The drivers perform internal wave-shaping and pre-emphasis, and output signals with typical amplitude of 2.5V peak for standard 10BASE-T mode and 1.75V peak for energy-efficient 10BASE-Te mode. The 10BASE-T/10BASE-Te signals have harmonic contents that are at least 31 dB below the fundamental frequency when driven by an all-ones Manchester-encoded signal.

### 4.1.5 10BASE-T RECEIVE

On the receive side, input buffer and level-detecting squelch circuits are used. A differential input receiver circuit and a phase-locked loop (PLL) perform the decoding function. The Manchester-encoded data stream is separated into clock signal and NRZ data. A squelch circuit rejects signals with levels less than 300 mV or with short pulse widths to prevent noises at the receive inputs from falsely triggering the decoder. When the input exceeds the squelch limit, the PLL locks onto the incoming signal and the KSZ9131MNX decodes a data frame. The receiver clock is maintained active during idle periods between receiving data frames.

The KSZ9131MNX removes all 7 bytes of the preamble and presents the received frame starting with the SFD (start of frame delimiter) to the MAC.

Auto-polarity correction is provided for the receiving differential pair to automatically swap and fix the incorrect +/– polarity wiring in the cabling.


## 4.2 1000BASE-T Transceiver

The 1000BASE-T transceiver is based-on a mixed-signal/digital-signal processing (DSP) architecture, which includes the analog front-end, digital channel equalizers, trellis encoders/decoders, echo cancelers, cross-talk cancelers, precision clock recovery scheme, and power-efficient line drivers.

Figure 4-2 shows a high-level block diagram of a single channel of the 1000BASE-T transceiver for one of the four differential pairs.


© 2018-2021 Microchip Technology Inc.

**FIGURE 4-2: KSZ9131 1000BASE-T BLOCK DIAGRAM - SINGLE CHANNEL**

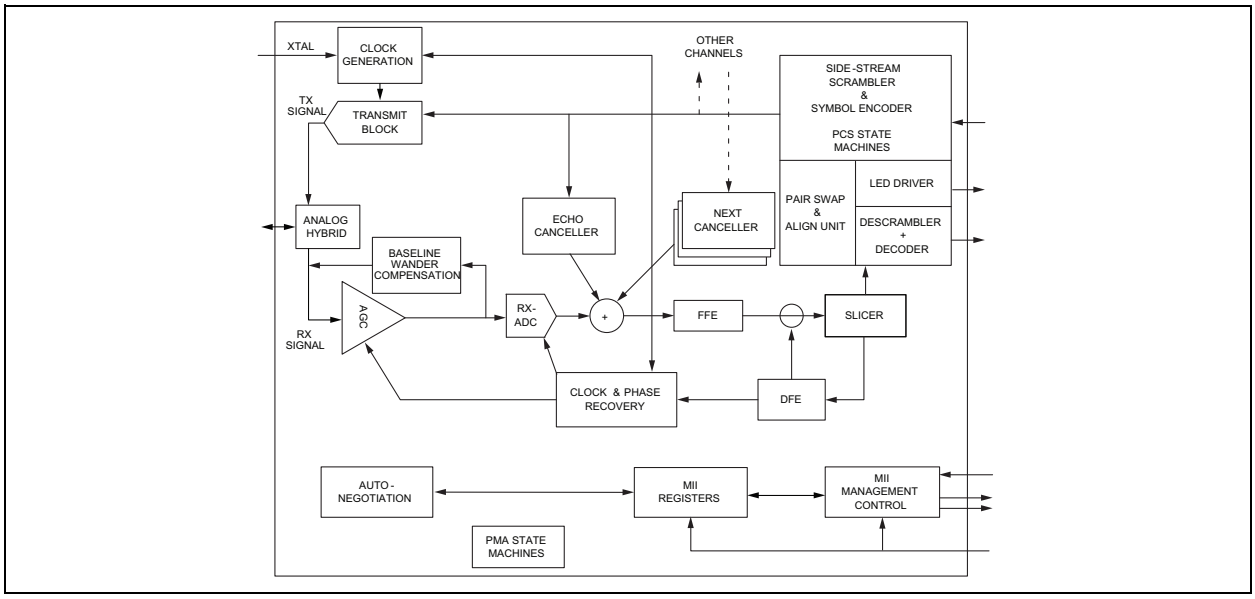


### 4.2.1 ANALOG ECHO-CANCELLATION CIRCUIT

In 1000BASE-T mode, the analog echo-cancellation circuit helps to reduce the near-end echo. This analog hybrid circuit relieves the burden of the ADC and the adaptive equalizer.

This circuit is disabled in 10BASE-T/100BASE-TX mode.

### 4.2.2 AUTOMATIC GAIN CONTROL (AGC)

In 1000BASE-T mode, the automatic gain control (AGC) circuit provides initial gain adjustment to boost up the signal level. This pre-conditioning circuit is used to improve the signal-to-noise ratio of the receive signal.

### 4.2.3 ANALOG-TO-DIGITAL CONVERTER (ADC)

In 1000BASE-T mode, the analog-to-digital converter (ADC) digitizes the incoming signal. ADC performance is essential to the overall performance of the transceiver.

This circuit is disabled in 10BASE-T/100BASE-TX mode.

### 4.2.4 TIMING RECOVERY CIRCUIT

In 1000BASE-T mode, the mixed-signal clock recovery circuit together with the digital phase-locked loop is used to recover and track the incoming timing information from the received data. The digital phase-locked loop has very low long-term jitter to maximize the signal-to-noise ratio of the receive signal.

The 1000BASE-T slave PHY must transmit the exact receive clock frequency recovered from the received data back to the 1000BASE-T master PHY. Otherwise, the master and slave will not be synchronized after long transmission. This also helps to facilitate echo cancellation and NEXT removal.

### 4.2.5 ADAPTIVE EQUALIZER

In 1000BASE-T mode, the adaptive equalizer provides the following functions:

- Detection for partial response signaling
- Removal of NEXT and ECHO noise
- Channel equalization

Signal quality is degraded by residual echo that is not removed by the analog hybrid because of impedance mismatch. The KSZ9131MNX uses a digital echo canceler to further reduce echo components on the receive signal.

In 1000BASE-T mode, data transmission and reception occurs simultaneously on all four pairs of wires (four channels). This results in high-frequency cross-talk coming from adjacent wires. The KSZ9131MNX uses three NEXT cancelers on each receive channel to minimize the cross-talk induced by the other three channels.

In 10BASE-T/100BASE-TX mode, the adaptive equalizer needs only to remove the inter-symbol interference and recover the channel loss from the incoming data.

### 4.2.6 TRELLIS ENCODER AND DECODER

In 1000BASE-T mode, the transmitted 8-bit data is scrambled into 9-bit symbols and further encoded into 4D-PAM5 symbols. The initial scrambler seed is determined by the specific PHY address to reduce EMI when more than one KSZ9131 is used on the same board. On the receiving side, the idle stream is examined first. The scrambler seed, pair skew, pair order, and polarity must be resolved through the logic. The incoming 4D-PAM5 data is then converted into 9-bit symbols and de-scrambled into 8-bit data.

## 4.3 Auto MDI/MDI-X

The Automatic MDI/MDI-X feature eliminates the need to determine whether to use a straight cable or a crossover cable between the KSZ9131MNX and its link partner. This auto-sense function detects the MDI/MDI-X pair mapping from the link partner, and assigns the MDI/MDI-X pair mapping of the KSZ9131MNX accordingly.

Table 4-1 shows the KSZ9131MNX 10/100/1000 pin configuration assignments for MDI/MDI-X pin mapping.

**TABLE 4-1: MDI/MDI-X PIN MAPPING**

| Pin (RJ-45 Pair) | MDI | | | MDI-X | | |
|---|---|---|---|---|---|---|
| | 1000BASE-T | 100BASE-T | 10BASE-T | 1000BASE-T | 100BASE-T | 10BASE-T |
| TXRXP/M_A (1, 2) | A+/– | TX+/– | TX+/– | A+/– | RX+/– | RX+/– |
| TXRXP/M_B (3, 6) | B+/– | RX+/– | RX+/– | B+/– | TX+/– | TX+/– |
| TXRXP/M_C (4, 5) | C+/– | Not Used | Not Used | C+/– | Not Used | Not Used |
| TXRXP/M_D (7, 8) | D+/– | Not Used | Not Used | D+/– | Not Used | Not Used |

Auto MDI/MDI-X is enabled by default. It is disabled by writing a one to the Swap-Off bit in the Auto-MDI/MDI-X Register. MDI and MDI-X mode is set by the MDI Set bit in the Auto-MDI/MDI-X Register if Auto MDI/MDI-X is disabled.

An isolation transformer with symmetrical transmit and receive data paths is recommended to support Auto MDI/MDI-X.

## 4.4 Pair-Swap, Alignment, and Polarity Check

In 1000BASE-T mode, the KSZ9131MNX

- Detects incorrect channel order and automatically restores the pair order for the A, B, C, D pairs (four channels).
- Supports 50 ns ±10 ns difference in propagation delay between pairs of channels in accordance with the IEEE 802.3 standard, and automatically corrects the data skew so the corrected four pairs of data symbols are synchronized.

Incorrect pair polarities of the differential signals are automatically corrected for all speeds.

## 4.5 Wave Shaping, Slew-Rate Control, and Partial Response

In communication systems, signal transmission encoding methods are used to provide the noise-shaping feature and to minimize distortion and error in the transmission channel.

- For 1000BASE-T, a special partial-response signaling method is used to provide the band-limiting feature for the transmission path.
- For 100BASE-TX, a simple slew-rate control method is used to minimize EMI.
- For 10BASE-T, pre-emphasis is used to extend the signal quality through the cable.

## 4.6 PLL Clock Synthesizer

The KSZ9131MNX generates 125 MHz, 25 MHz, and 10 MHz clocks for system timing. Internal clocks are generated from the external 25 MHz crystal or reference clock.


© 2018-2021 Microchip Technology Inc.

## 4.7 Auto-Negotiation

The KSZ9131MNX conforms to the auto-negotiation protocol, defined in Clause 28 of the IEEE 802.3 Specification.

Auto-negotiation allows UTP (unshielded twisted pair) link partners to select the highest common mode of operation.

During auto-negotiation, link partners advertise capabilities across the UTP link to each other, and then compare their own capabilities with those they received from their link partners. The highest speed and duplex setting that is common to the two link partners is selected as the operating mode.

The following list shows the speed and duplex operation mode from highest-to-lowest:


- Priority 1: 1000BASE-T, full-duplex
- Priority 2: 1000BASE-T, half-duplex

  **Note:** The device does not support 1000BASE-T, half-duplex and should not be enabled to advertise such.
- Priority 3: 100BASE-TX, full-duplex
- Priority 4: 100BASE-TX, half-duplex
- Priority 5: 10BASE-T, full-duplex
- Priority 6: 10BASE-T, half-duplex

If auto-negotiation is not supported or the KSZ9131MNX link partner is forced to bypass auto-negotiation for 10BASE-T and 100BASE-TX modes, the KSZ9131MNX sets its operating mode by observing the input signal at its receiver. This is known as parallel detection, and allows the KSZ9131MNX to establish a link by listening for a fixed signal protocol in the absence of the auto-negotiation advertisement protocol.

The auto-negotiation link-up process is shown in Figure 4-3.

**FIGURE 4-3: AUTO-NEGOTIATION FLOW CHART**

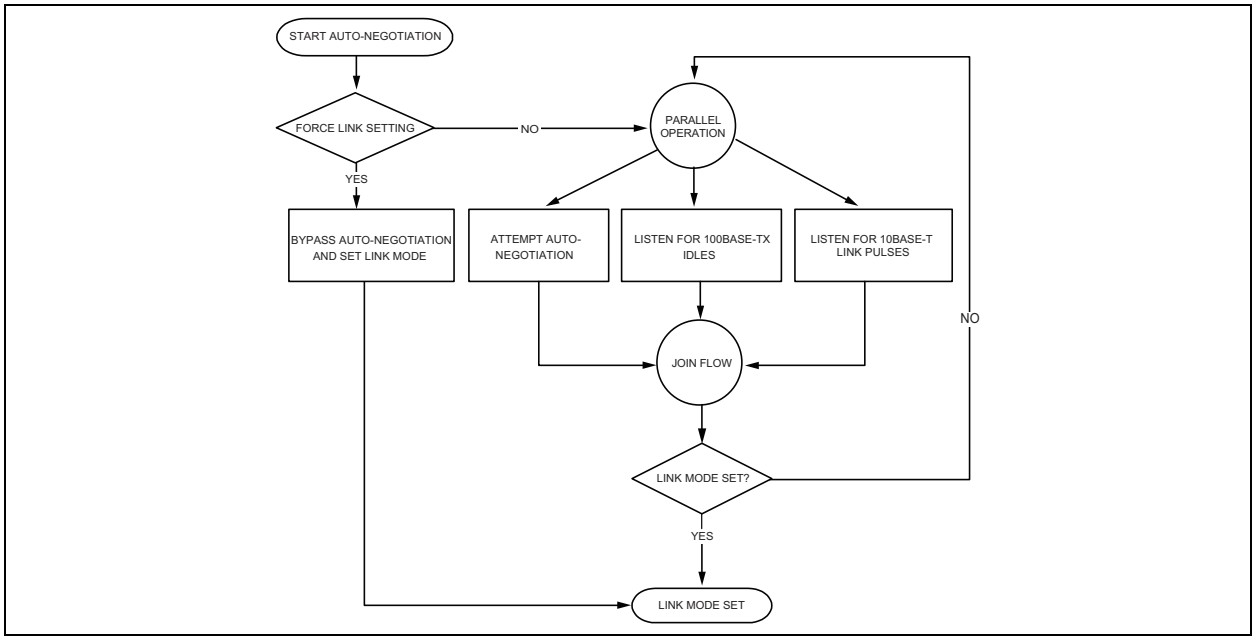


For 1000BASE-T mode, auto-negotiation is required and always used to establish a link. During 1000BASE-T auto-negotiation, the master and slave configuration is first resolved between link partners. Then the link is established with the highest common capabilities between link partners.

Auto-negotiation is enabled by default after power-up or hardware reset. After that, auto-negotiation can be enabled or disabled through the Auto-Negotiation Enable bit in the Basic Control Register. If auto-negotiation is disabled, the speed is set by the Speed Select[0] and Speed Select[1] bits and the duplex is set by the Duplex Mode, all in the Basic Control Register.

If the speed is changed on the fly, the link goes down and either auto-negotiation or parallel detection initiates until a common speed between KSZ9131MNX and its link partner is re-established for a link.

If the link is already established and there is no change of speed on the fly, the changes (for example, duplex and pause capabilities) will not take effect unless either auto-negotiation is restarted through the Restart Auto-Negotiation (PHY_RST_AN) bit in the Basic Control Register, or a link-down to link-up transition occurs (that is, disconnecting and reconnecting the cable).

After auto-negotiation is completed, the link status is updated in the Link Status bit of the Basic Status Register and the link partner capabilities are updated in the Auto-Negotiation Link Partner Base Page Ability Register, Auto-Negotiation Expansion Register, and Auto-Negotiation Master Slave Status Register.

The auto-negotiation finite state machines use interval timers to manage the auto-negotiation process. The duration of these timers under normal operating conditions is summarized in Table 4-2.

**TABLE 4-2: AUTO-NEGOTIATION TIMERS**

| Auto-Negotiation Interval Timers | Time Duration |
|---|---|
| Transmit Burst Interval | 16 ms |
| Transmit Pulse Interval | 68 µs |
| FLP Detect Minimum Time | 17.2 µs |
| FLP Detect Maximum Time | 185 µs |
| Receive Minimum Burst Interval | 6.8 ms |
| Receive Maximum Burst Interval | 112 ms |
| Data Detect Minimum Interval | 35.4 µs |
| Data Detect Maximum Interval | 95 µs |
| NLP Test Minimum Interval | 4.5 ms |
| NLP Test Maximum Interval | 30 ms |
| Link Loss Time | 52 ms |
| Break Link Time | 1480 ms |
| Parallel Detection Wait Time | 830 ms |
| Link Enable Wait Time | 1000 ms |

### 4.7.1 AUTO-NEGOTIATION NEXT PAGE USAGE

The device supports “Next Page” capability which is used to negotiate Gigabit Ethernet and Energy Efficient Ethernet functionality as well as to support software controlled pages.

As described in IEEE 802.3 Annex 40C “Add-on interface for additional Next Pages”, the device will autonomously send and receive the Gigabit Ethernet and Energy Efficient Ethernet next pages and then optionally send and receive software controlled next pages.

Gigabit Ethernet next pages consist of one message and two unformatted pages. The message page contains an 8 as the message code. The first unformatted page contains the information from the Auto-Negotiation Master Slave Control Register. The second unformatted page contains the Master-Slave Seed value used to resolve the Master-Slave selection. The result of the Gigabit Ethernet next pages exchange is stored in Auto-Negotiation Master Slave Status Register.

Gigabit Ethernet next pages are always transmitted, regardless of the advertised settings in the Auto-Negotiation Master Slave Control Register.

Energy Efficient Ethernet (EEE) next pages consist of one message and one unformatted page. The message page contains a 10 as the message code (this value can be overridden in the EEE Message Code Register). The unformatted page contains the information from the EEE Advertisement Register. The result of the Gigabit Ethernet next pages exchange is stored in EEE Link Partner Ability Register.

EEE next pages are transmitted only if the advertised setting in the EEE Advertisement Register is not zero.

**APPLICATION NOTE:** The Gigabit Ethernet and EEE next pages may be viewed in Auto-Negotiation Next Page RX Register as they are exchanged.

Following the EEE next page exchange, software controlled next pages are exchanged when the Next Page bit in the Auto-Negotiation Advertisement Register is set. Software controlled next page status is monitored via the Auto-Negotiation Expansion Register and Auto-Negotiation Next Page RX Register.


© 2018-2021 Microchip Technology Inc.

## 4.8 10/100 Mbps Speeds Only

Some applications require link-up to be limited to 10/100 Mbps speeds only.

After power-up/reset, the KSZ9131MNX can be restricted to auto-negotiate and link-up to 10/100 Mbps speeds only by programming the following register settings:

1. Configure the Speed Select[1] bit in the Basic Control Register to '0' to disable the 1000 Mbps speed.
2. Configure the 1000BASE-T Full Duplex and 1000BASE-T Half Duplex bits in the Auto-Negotiation Master Slave Control Register to '00' to remove Auto-Negotiation advertisements for 1000 Mbps full/half duplex.
3. Write a '1' to the Restart Auto-Negotiation (PHY_RST_AN) bit in the Basic Control Register, a self-clearing bit, to force a restart of Auto-Negotiation.

Auto-Negotiation and 10BASE-T/100BASE-TX speeds use only differential pairs A and B. Differential pairs C and D can be left as no connects.

## 4.9 GMII Interface

The Gigabit Media Independent Interface (GMII) is compliant to the IEEE 802.3 Specification. It provides a common interface between GMII PHYs and MACs, and has the following key characteristics:

- Pin count is 24 pins (11 pins for data transmission, 11 pins for data reception, and 2 pins for carrier and collision indication).
- 1000 Mbps is supported at both half- and full-duplex.

| **Note:** | The device does not support 1000BASE-T, half-duplex and should not be enabled to advertise such. |
|---|---|

- Data transmission and reception are independent and belong to separate signal groups.
- Transmit data and receive data are each 8 bits wide, a byte.

In GMII operation, the GMII pins function as follows:

- The MAC sources the transmit reference clock, GTX_CLK, at 125 MHz for 1000 Mbps.
- The PHY recovers and sources the receive reference clock, RX_CLK, at 125 MHz for 1000 Mbps.
- TX_EN, TXD[7:0], and TX_ER are sampled by the KSZ9131 on the rising edge of GTX_CLK.
- RX_DV, RXD[7:0], and RX_ER are sampled by the MAC on the rising edge of RX_CLK.
- CRS and COL are driven by the KSZ9131MNX and do not have to transition synchronously with respect to either GTX_CLK or RX_CLK.

The KSZ9131MNX combines GMII mode with MII mode to form GMII/MII mode to support data transfer at 10/100/1000 Mbps. After power-up or reset, the KSZ9131MNX is configured to GMII/MII mode if the MODE[3:0] strap-in pins are set to '0001', '1001', or '1011'. See Section 3.3, "Configuration Straps" for additional information.

The KSZ9131MNX has the option to output a 125 MHz reference clock on CLK125_NDO (Pin 55). This clock provides a lower-cost reference clock alternative for GMII/MII MACs that require a 125 MHz crystal or oscillator. The 125 MHz clock output is enabled after power-up or reset if the CLK125_EN strap-in pin is pulled high or the clk125 Enable bit is set in the Common Control Register.

The KSZ9131MNX provides a dedicated transmit clock input pin (GTX_CLK, Pin 32) for GMII mode, which is sourced by the MAC for 1000 Mbps speed.

### 4.9.1 GMII SIGNAL DEFINITION

Table 4-3 describes the GMII signals. Refer to Clause 35 of the IEEE 802.3 Specification for more detailed information.


**TABLE 4-3: GMII SIGNAL DEFINITION**

| GMII Signal Name (per spec) | GMII Signal Name (per KSZ9131) | Pin Type (with respect to PHY) | Pin Type (with respect to MAC) | Description |
|---|---|---|---|---|
| GTX_CLK | GTX_CLK | Input | Output | Transmit Reference Clock (125 MHz for 1000 Mbps) |
| TX_EN | TX_EN | Input | Output | Transmit Enable |
| TXD[7:0] | TXD[7:0] | Input | Output | Transmit Data[7:0] |
| TX_ER | TX_ER | Input | Output | Transmit Error |
| RX_CLK | RX_CLK | Output | Input | Receive Reference Clock (125 MHz for 1000 Mbps) |
| RX_DV | RX_DV | Output | Input | Receive Data Valid |
| RXD[7:0] | RXD[7:0] | Output | Input | Receive Data[7:0] |
| RX_ER | RX_ER | Output | Input | Receive Error |
| CRS | CRS | Output | Input | Carrier Sense |
| COL | COL | Output | Input | Collision Detected |

### 4.9.2 GMII SIGNAL DIAGRAM

The KSZ9131MNX GMII pin connections to the MAC are shown in Figure 4-4.

**FIGURE 4-4: KSZ9131MNX GMII INTERFACE**

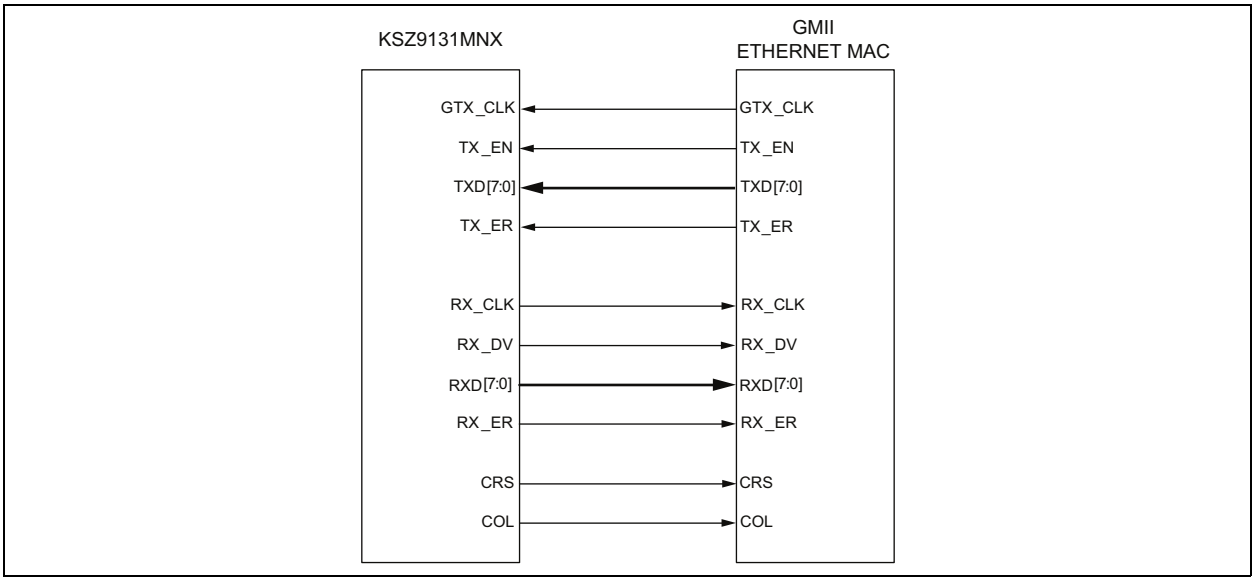



© 2018-2021 Microchip Technology Inc.

## 4.10 MII Interface

The Media Independent Interface (MII) is compliant with the IEEE 802.3 Specification. It provides a common interface between MII PHYs and MACs, and has the following key characteristics:

- Pin count is 16 pins (7 pins for data transmission, 7 pins for data reception, and 2 pins for carrier and collision indication).
- 10 Mbps and 100 Mbps are supported at both half- and full-duplex.
- Data transmission and reception are independent and belong to separate signal groups.
- Transmit data and receive data are each 4 bits wide, a nibble.

In MII operation, the MII pins function as follows:

- The PHY sources the transmit reference clock, TX_CLK, at 25 MHz for 100 Mbps and 2.5 MHz for 10 Mbps.
- The PHY recovers and sources the receive reference clock, RX_CLK, at 25 MHz for 100 Mbps and 2.5 MHz for 10 Mbps.
- TX_EN, TXD[3:0], and TX_ER are driven by the MAC and transition synchronously with respect to TX_CLK.
- RX_DV, RXD[3:0], and RX_ER are driven by the KSZ9131MNX and transition synchronously with respect to RX_CLK.
- CRS and COL are driven by the KSZ9131MNX and do not have to transition synchronously with respect to either TX_CLK or RX_CLK.

The KSZ9131MNX combines GMII mode with MII mode to form GMII/MII mode to support data transfer at 10/100/1000 Mbps. After power-up or reset, the KSZ9131 is configured to GMII/MII mode if the MODE[3:0] strap-in pins are set to ‘0001’, ‘1001’, or ‘1011’. See Section 3.3, "Configuration Straps" for additional information.

The KSZ9131MNX has the option to output a 125 MHz reference clock on CLK125_NDO (Pin 55). This clock provides a lower-cost reference clock alternative for GMII/MII MACs that require a 125 MHz crystal or oscillator. The 125 MHz clock output is enabled after power-up or reset if the CLK125_EN strap-in pin is pulled high or the clk125 Enable bit is set in the Common Control Register.

The KSZ9131MNX provides a dedicated transmit clock output pin (TX_CLK, Pin 57) for MII mode, which is sourced by the KSZ9131MNX for 10/100 Mbps speed.

### 4.10.1 MII SIGNAL DEFINITION

Table 4-4 describes the MII signals. Refer to Clause 22 of the IEEE 802.3 Specification for detailed information.


**TABLE 4-4: MII SIGNAL DEFINITION**

| MII Signal Name (per spec) | MII Signal Name (per KSZ9131) | Pin Type (with respect to PHY) | Pin Type (with respect to MAC) | Description |
|---|---|---|---|---|
| TX_CLK | TX_CLK | Output | Input | Transmit Reference Clock (25 MHz for 100 Mbps, 2.5 MHz for 10 Mbps) |
| TX_EN | TX_EN | Input | Output | Transmit Enable |
| TXD[3:0] | TXD[3:0] | Input | Output | Transmit Data[3:0] |
| TX_ER | TX_ER | Input | Output | Transmit Error |
| RX_CLK | RX_CLK | Output | Input | Receive Reference Clock (25 MHz for 100 Mbps, 2.5 MHz for 10 Mbps) |
| RX_DV | RX_DV | Output | Input | Receive Data Valid |
| RXD[3:0] | RXD[3:0] | Output | Input | Receive Data[3:0] |
| RX_ER | RX_ER | Output | Input | Receive Error |
| CRS | CRS | Output | Input | Carrier Sense |
| COL | COL | Output | Input | Collision Detection |

### 4.10.2 MII SIGNAL DIAGRAM

The KSZ9131MNX MII pin connections to the MAC are shown in Figure 4-5.

**FIGURE 4-5: KSZ9131MNX MII INTERFACE**

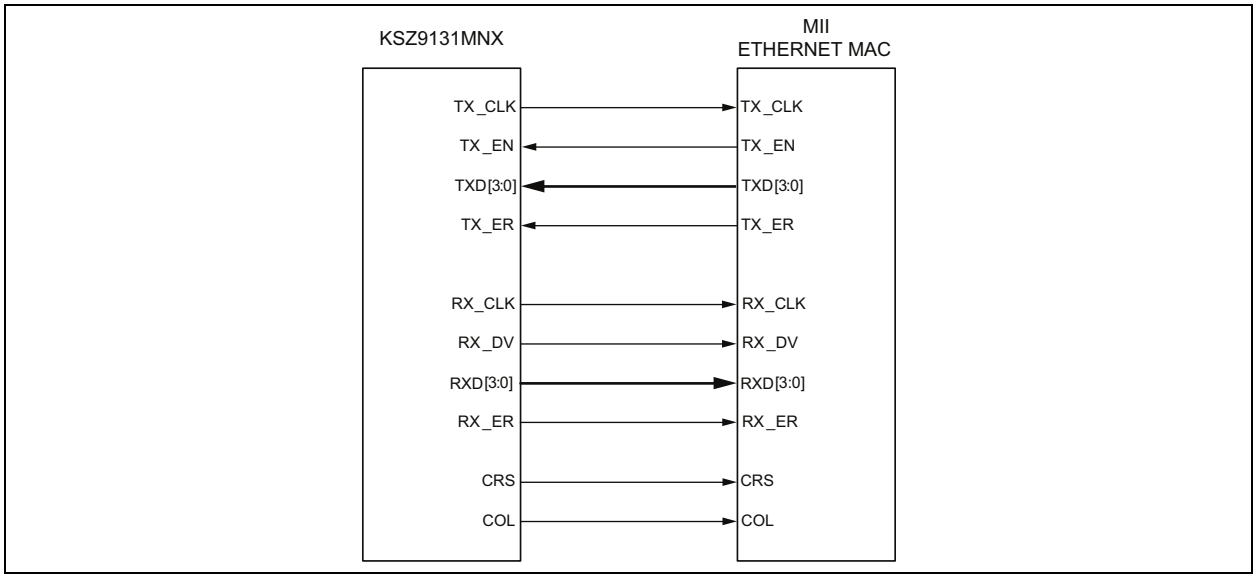


## 4.11 MII Management (MIIM) Interface

The KSZ9131MNX supports the IEEE 802.3 MII management interface, also known as the Management Data Input/Output (MDIO) interface. This interface allows upper-layer devices to monitor and control the state of the KSZ9131MNX. An external device with MIIM capability is used to read the PHY status and/or configure the PHY settings. More details about the MIIM interface can be found in Clause 22.2.4 of the IEEE 802.3 Specification.

The MIIM interface consists of the following:

- A physical connection that incorporates the clock line (MDC) and the data line (MDIO).
- A specific protocol that operates across the physical connection mentioned earlier, which allows an external controller to communicate with one or more KSZ9131MNX devices. Each KSZ9131MNX device is assigned a unique PHY address between 0h and 7h by the PHYAD[2:0] strapping pins.
- A 32-register address space for direct access to IEEE-defined registers and vendor-specific registers, and for indirect access to MMD addresses and registers. See the Register Map section.

Table 4-5 shows the MII management frame format for the KSZ9131MNX.

**TABLE 4-5: MII MANAGEMENT FRAME FORMAT FOR THE KSZ9131MNX**

| | Preamble | Start of Frame | Read/Write OP Code | PHY Address Bits [4:0] | REG Address Bits [4:0] | TA | Data Bits [15:0] | Idle |
|---|---|---|---|---|---|---|---|---|
| **Read** | 32 1's | 01 | 10 | 00AAA | RRRRR | Z0 | DDDDDDDD_DDDDDDDD | Z |
| **Write** | 32 1's | 01 | 01 | 00AAA | RRRRR | 10 | DDDDDDDD_DDDDDDDD | Z |

### 4.11.1 ALL PHYS ADDRESS

Normally, the Ethernet PHY is accessed at the PHY address set by the PHYAD[2:0] strapping pins.

PHY Address 0h is optionally supported as the broadcast PHY address, which allows for a single write command to simultaneously program an identical PHY register for two or more PHY devices (for example, using PHY Address 0h to set the Basic Control Register to a value of 0x1940 to set Bit [11] to a value of one to enable software power-down).

PHY address 0 is enabled (in addition to the PHY address set by the PHYAD[2:0] strapping pins) when the All-PHYAD Enable bit in the Common Control Register is a 1.


© 2018-2021 Microchip Technology Inc.

### 4.11.2 MDIO OUTPUT DRIVE MODE

The MDIO output pin drive mode is controlled by the MDIO Drive bit in MDIO Drive Register. When set to a 0, the MDIO output is open-drain. When set to a 1, the MDIO output is push-pull.

## 4.12 Interrupt (INT_N)

The INT_N pin is an optional interrupt signal that is used to inform the external controller that there has been a status update in the KSZ9131MNX PHY register. Bits [15:8] of the Interrupt Control/Status Register are the interrupt control bits that enable and disable the conditions for asserting the INT_N signal. Bits [7:0] of the Interrupt Control/Status Register are the interrupt status bits that indicate which interrupt conditions have occurred. The interrupt status bits are cleared after reading the Interrupt Control/Status Register.

The Interrupt Polarity Invert bit of the Control Register sets the interrupt level to active high or active low. The default is active low.

The MII management bus option gives the MAC processor complete access to the KSZ9131MNX control and status registers. Additionally, an interrupt pin eliminates the need for the processor to poll the PHY for status change.

## 4.13 LED Support

The KSZ9131MNX provides two programmable LED output pins, LED2 and LED1, which are configurable to support three LED modes. The LED mode is configured by the LED_MODE strap-in as well as the KSZ9031 LED Mode bit in the KSZ9031 LED Mode Register. It is latched at power-up/reset and is defined as follows:

- KSZ9031 LED Mode = 1, LED_MODE strap input high (pulled up): Individual-LED Mode
- KSZ9031 LED Mode = 1, LED_MODE strap input low (pulled down): Tri-Color-LED Mode
- KSZ9031 LED Mode = 0, LED_MODE strap is unused: Enhanced LED Mode

Each LED output pin can directly drive an LED with a series resistor (typically 220Ω to 470Ω).

### 4.13.1 INDIVIDUAL-LED MODE

In individual-LED mode, the LED2 pin indicates the link status while the LED1 pin indicates the activity status, as shown in Table 4-6.

**Note:**

- The LEDs are forced OFF when the Isolate (PHY_ISO) bit in the Basic Control Register is set.
- The LEDs are forced OFF when the Power Down bit in the Basic Control Register is set.

**TABLE 4-6: INDIVIDUAL-LED MODE - PIN DEFINITION**

| LED Pin | Pin State | LED Definition | Link/Activity |
|---|---|---|---|
| LED2 | H | OFF | Link Off |
| | L | ON | Link On (any speed) |
| LED1 | H | OFF | No Activity |
| | Toggle | Blinking | Activity (RX, TX) |

### 4.13.2 TRI-COLOR-LED MODE

In tri-color-LED mode, the link and activity status are indicated by the LED2 pin for 1000BASE-T; by the LED1 pin for 100BASE-TX; and by both LED2 and LED1 pins, working in conjunction, for 10BASE-T. This is summarized in Table 4-7.

**Note:**

- The LEDs are forced OFF when the Isolate (PHY_ISO) bit in the Basic Control Register is set.
- The LEDs are forced OFF when the Power Down bit in the Basic Control Register is set.

**TABLE 4-7: TRI-COLOR-LED MODE - PIN DEFINITION**

| LED Pin (State) | | LED Pin (Definition) | | Link/Activity |
|---|---|---|---|---|
| LED2 | LED1 | LED2 | LED1 | |
| H | H | OFF | OFF | Link Off |
| L | H | ON | OFF | 1000 Link/No Activity |
| Toggle | H | Blinking | OFF | 1000 Link/Activity (RX, TX) |
| H | L | OFF | ON | 100 Link/No Activity |
| H | Toggle | OFF | Blinking | 100 Link/Activity (RX, TX) |
| L | L | ON | ON | 10 Link/No Activity |
| Toggle | Toggle | Blinking | Blinking | 10 Link/Activity (RX, TX) |

### 4.13.3 ENHANCED LED MODE

Enhanced LED mode is enabled when the KSZ9031 LED Mode bit in the KSZ9031 LED Mode Register is cleared. In Enhanced LED mode, each LED can be configured to display different status information that can be selected by setting the corresponding LED Configuration field of the LED Mode Select Register. The modes are shown in Table 4-8. The blink/pulse-stretch and other LED settings can be configured via the LED Behavior Register.

**Note:** The LEDs are forced OFF when the Power Down bit in the Basic Control Register is set.

**TABLE 4-8: LED MODE AND FUNCTION SUMMARY**

| Mode | Name | Description |
|---|---|---|
| 0 | Link/Activity | 1 (led off) = No link in any speed on any media interface.<br>0 (led on) = Valid link at any speed on any media interface.<br>Blink or pulse stretch (led turns off) = Valid link at any speed on any media interface with activity present. |
| 1 | Link1000/Activity | 1 (led off) = No link at 1000BASE-T.<br>0 (led on) = Valid link at 1000BASE-T.<br>Blink or pulse stretch (led turns off) = Valid link at 1000BASE-T with activity present. |
| 2 | Link100/Activity | 1 (led off) = No link at 100BASE-TX.<br>0 (led on) = Valid link at 100BASE-TX.<br>Blink or pulse stretch (led turns off) = Valid link at 100BASE-TX with activity present. |
| 3 | Link10/Activity | 1 (led off) = No link at 10BASE-T.<br>0 (led on) = Valid link at 10BASE-T.<br>Blink or pulse stretch (led turns off) = Valid link at 10BASE-T with activity present. |
| 4 | Link100/1000/Activity | 1 (led off) = No link at 100BASE-TX or 1000BASE-T.<br>0 (led on) = Valid link at 100BASE-TX or 1000BASE-T.<br>Blink or pulse stretch (led turns off) = Valid link at 100BASE-TX or 1000BASE-T, with activity present. |
| 5 | Link10/1000/Activity | 1 (led off) = No link at 10BASE-T or 1000BASE-T.<br>0 (led on) = Valid link at 10BASE-T or 1000BASE-T.<br>Blink or pulse stretch (led turns off) = Valid link at 10BASE-T or 1000BASE-T, with activity present. |


© 2018-2021 Microchip Technology Inc.

**TABLE 4-8: LED MODE AND FUNCTION SUMMARY (CONTINUED)**

| Mode | Name | Description |
|---|---|---|
| 6 | Link10/100/Activity | 1 (led off) = No link at 10BASE-T or 100BASE-TX.<br>0 (led on) = Valid link at 10BASE-T or 100BASE-TX.<br>Blink or pulse stretch (led turns off) = Valid link at 10BASE-T or 100BASE-TX, with activity present. |
| 7 | RESERVED | RESERVED |
| 8 | Duplex/Collision | 1 (led off) = Link established in half-duplex mode, or no link established.<br>0 (led on) = Link established in full-duplex mode.<br>Blink or pulse stretch (led turns on) = Link established in half-duplex mode but collisions are present. |
| 9 | Collision | 1 (led off) = No collisions detected.<br>Blink or pulse stretch (led turns on) = Collision detected. |
| 10 | Activity | 1 (led off) = No activity present.<br>Blink or pulse stretch (led turns on) = Activity present. (becomes TX activity present if the LED Activity Output Select bit in the LED Behavior Register is set to 1.) |
| 11 | RESERVED | RESERVED |
| 12 | Auto-Negotiation Fault | 1 (led off) = No Auto-Negotiation fault present.<br>0 (led on) = Auto-Negotiation fault occurred. |
| 13 | RESERVED | RESERVED |
| 14 | Force LED Off | 1 (led off) = De-asserts the LED. |
| 15 | Force LED On | 0 (led on) = Asserts the LED. |

#### 4.13.3.1 LED Behavior

Using the LED Behavior Register, the following LED behaviors can be configured.:

- LED Combine
- LED Blink or Pulse-Stretch
- Rate of LED Blink or Pulse-Stretch
- LED Pulsing Enable

##### *4.13.3.1.1 LED Combine*

Enables an LED to display the status for a combination of primary and secondary modes. This can be enabled or disabled for each LED pin via the LED Combination Disables field of the LED Behavior Register. For example, a copper link running in 1000BASE-T mode with activity present can be displayed with one LED by configuring an LED pin to Link1000/Activity mode. The LED asserts when linked to a 1000BASE-T partner and also blinks or performs pulse-stretch when activity is either transmitted by the PHY or received by the Link Partner. When disabled, the combine feature only provides status of the selected primary function. In this example, only Link1000 asserts the LED, and the secondary mode, activity, does not display if the combine feature is disabled.

| | |
|---|---|
| **Note:** | LED Behavior Register, Bit 15 = 1 (Default is 0) to set the LED Link/Activity to the desired value. This can be done in the same LED Behavior Register write to set the LED Combine Disables field. |


##### *4.13.3.1.2 LED Blink or Pulse-Stretch*

This behavior is used for activity and collision indication. This can be uniquely configured for each LED pin via the LED Pulse Stretch Enables field of the LED Behavior Register. Activity and collision events can occur randomly and intermittently throughout the link-up period.

Blink is a 50% duty cycle oscillation of asserting and de-asserting an LED pin.

As shown in Figure 4-6, for a single event, the LED will blink (either on or off depending on the LED function) for half of the blink period. For continual events, the LED will oscillate at the blink rate.


**FIGURE 4-6: LED BLINK PATTERN**

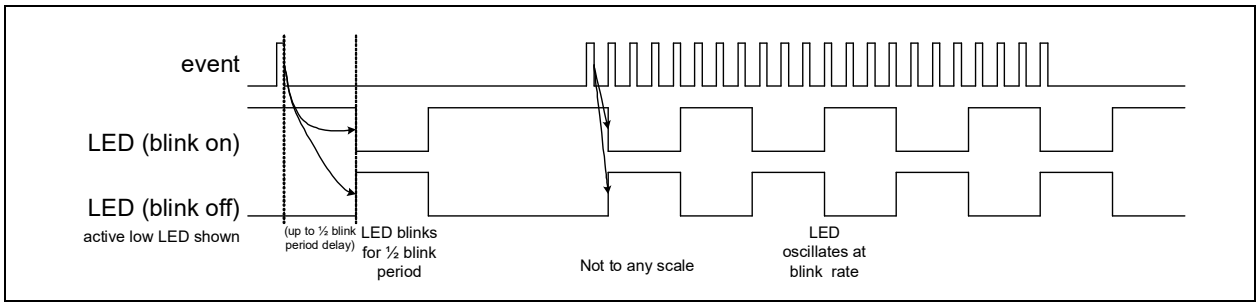


Pulse-stretch ensures that an LED is asserted and de-asserted for a specific period of time when activity is either present or not present.

As shown in Figure 4-7, for a single event, the LED will pulse (either on or off depending on the LED function) for the full pulse period. For continual events, the LED will remain on (or off) and will extend from a half to one and a half pulse periods once the events terminate. Once off (or on), the LED will remain in that state for at least a half pulse period.

**FIGURE 4-7: LED PULSE PATTERN**

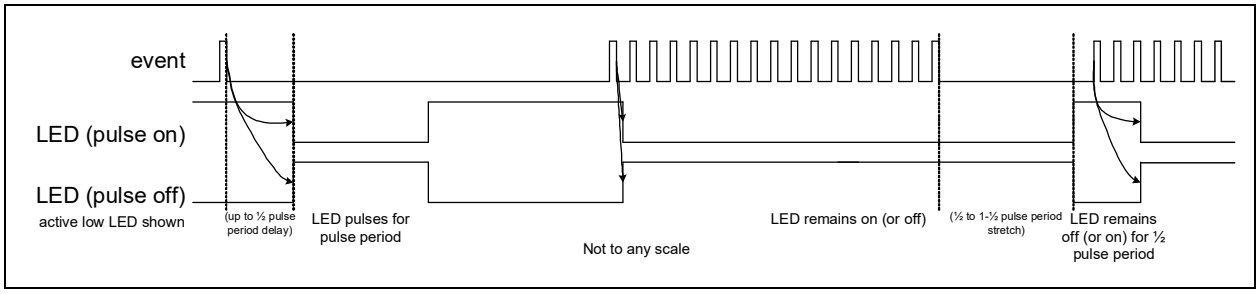


The blink / pulse stretch rate can be configured, as detailed in Section 4.13.3.1.3, "Rate of LED Blink or Pulse-Stretch".

#### *4.13.3.1.3 Rate of LED Blink or Pulse-Stretch*

This behavior controls the LED blink rate or pulse-stretch length when the blink/pulse-stretch is enabled (LED Pulse Stretch Enables) on an LED pin. This can be uniquely configured for each LED pin via the LED Blink / Pulse-Stretch Rate field of the LED Behavior Register. The blink rate, which alternates between a high and low voltage level at a 50% duty cycle, can be set to 2.5 Hz, 5 Hz, 10 Hz, or 20 Hz. For pulse-stretch, the rate can be set to 50 ms, 100 ms, 200 ms, or 400 ms.

#### *4.13.3.1.4 LED Pulsing Enable*

To provide additional power savings, the LEDs (when asserted) can be modulated at 5 kHz, 20% duty cycle, by setting the LED Pulsing Enable bit of the LED Behavior Register.

## 4.14 Loopback Modes

The KSZ9131MNX supports the following loopback operations to verify analog and/or digital data paths.

- Digital (near-end) loopback
- Remote (far-end) loopback
- External connector loopback

### 4.14.1 DIGITAL (NEAR-END) LOOPBACK


This loopback mode checks the GMII/MII transmit and receive data paths between the KSZ9131MNX and the external MAC, and is supported for all three speeds (10/100/1000 Mbps) at full-duplex.


© 2018-2021 Microchip Technology Inc.

The loopback data path is shown in Figure 4-8.

1. GMII/MII MAC transmits frames to KSZ9131MNX.
2. Frames are wrapped around inside KSZ9131MNX.
3. KSZ9131MNX transmits frames back to GMII/MII MAC.

**FIGURE 4-8: DIGITAL (NEAR-END) LOOPBACK**

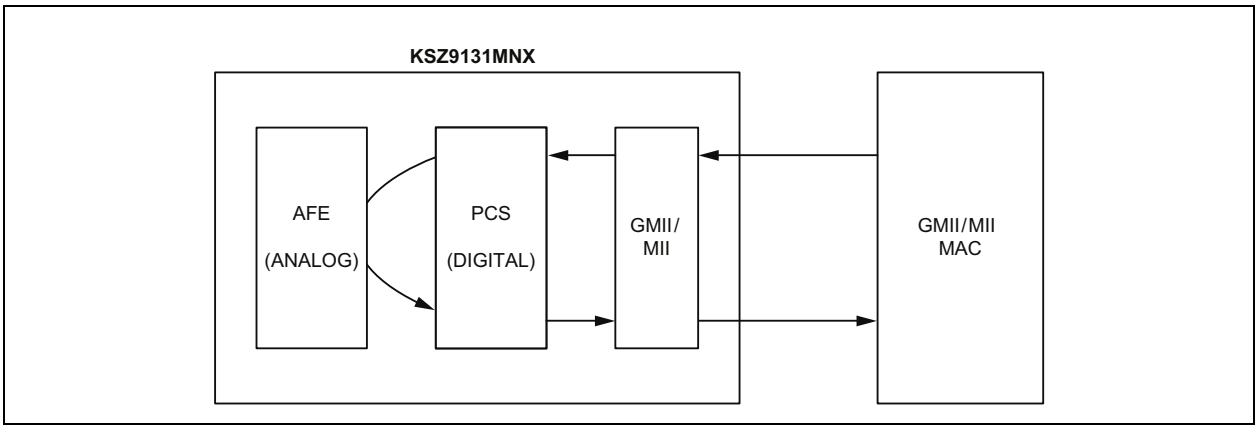


The following programming steps and register settings are used for local loopback mode.

For 1000 Mbps loopback,

1. Configure the following registers:
   - MMD 1C, Register 15 = EEEE
   - MMD 1C, Register 16 = EEEE
   - MMD 1C, Register 18 = EEEE
   - MMD 1C, Register 1B = EEEE
2. Configure the Basic Control Register:
   - Bit [14] = 1 // Enable local loopback mode
   - Bits [6, 13] = 10 // Select 1000 Mbps speed
   - Bit [12] = 0 // Disable auto-negotiation
   - Bit [8] = 1 // Select full-duplex mode
3. Configure the Auto-Negotiation Master Slave Control Register:
   - Bit [12] = 1 // Enable master-slave manual configuration
   - Bit [11] = 0 // Select slave configuration (required for loopback mode)

For 10/100 Mbps loopback,

1. Configure the following registers:
   - MMD 1C, Register 15 = EEEE
   - MMD 1C, Register 16 = EEEE
   - MMD 1C, Register 18 = EEEE
   - MMD 1C, Register 1B = EEEE
2. Configure the Basic Control Register:
   - Bit [14] = 1 // Enable local loopback mode
   - Bits [6, 13] = 00 / 01 // Select 10 Mbps/100 Mbps speed
   - Bit [12] = 0 // Disable auto-negotiation
   - Bit [8] = 1 // Select full-duplex mode


### 4.14.2 REMOTE (FAR-END) LOOPBACK

This loopback mode checks the line (differential pairs, transformer, RJ-45 connector, Ethernet cable) transmit and receive data paths between the KSZ9131MNX and its link partner, and is supported for 1000BASE-T full-duplex mode only.

The loopback data path is shown in Figure 4-9.

1. The Gigabit PHY link partner transmits frames to KSZ9131MNX.
2. Frames are wrapped around inside KSZ9131MNX.
3. KSZ9131MNX transmits frames back to the Gigabit PHY link partner.

**FIGURE 4-9: REMOTE (FAR-END) LOOPBACK**

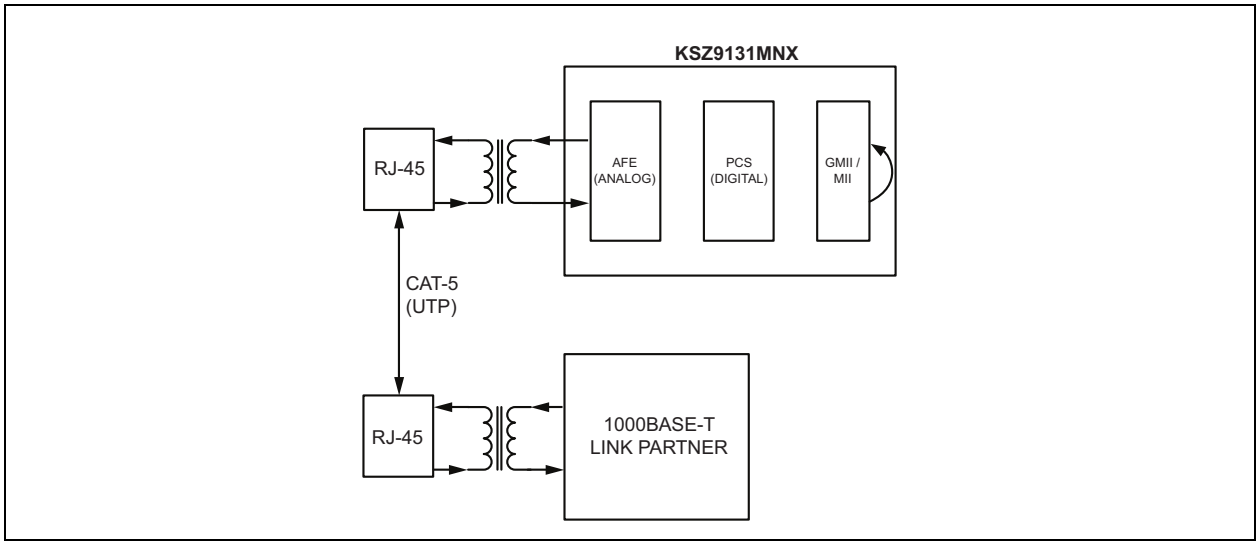


The following programming steps and register settings are used for remote loopback mode.

1. Configure the Basic Control Register:
   - Bits [6, 13] = 10 // Select 1000 Mbps speed
   - Bit [12] = 0 // Disable auto-negotiation
   - Bit [8] = 1 // Select full-duplex mode

   Or just auto-negotiate and link up at 1000BASE-T full-duplex mode with the link partner.
2. Configure the Remote Loopback Register:
   - Bit [8] = 1 // Enable remote loopback mode
3. Connect RX_CLK to TX_CLK


© 2018-2021 Microchip Technology Inc.

### 4.14.3 EXTERNAL CONNECTOR LOOPBACK

The connector loopback testing feature allows the twisted pair interface to be looped back externally. When using this feature, the PHY must be connected to a loopback connector or a loopback cable. Pair A should be connected to pair B, and pair C to pair D, as shown in Figure 4-10. The connector loopback feature functions at all available interface speeds.


This loopback tests the PHY digital and MAC connectivity.

When using the connector loopback testing feature, the device Auto-Negotiation, speed, and duplex configuration is set using the Basic Control Register, Auto-Negotiation Advertisement Register, and Auto-Negotiation Master Slave Control Register.

For 1000BASE-T connector loopback, the following additional writes are required to be executed in the following order:

- Disable Auto-Negotiation and set the speed to 1000Mbps and the duplex to full by setting the Basic Control Register to a value of 0140h.
- Set the Master-Slave configuration to master by setting the Master/Slave Manual Configuration Enable and Master/Slave Manual Configuration Value bits in the Auto-Negotiation Master Slave Control Register.
- Enable the 1000BASE-T connector loopback by setting the Ext_lpbk bit in the External Loopback Register.

**FIGURE 4-10: EXTERNAL CONNECTOR LOOPBACK**

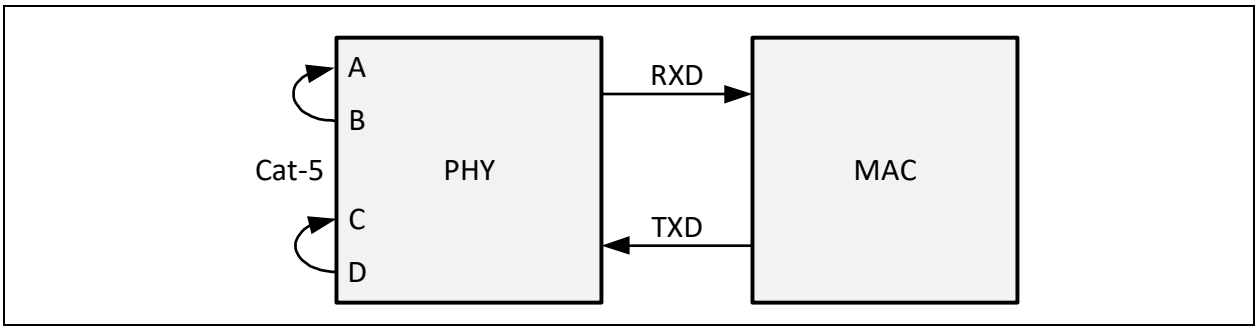


## 4.15 LinkMD® Cable Diagnostic

The LinkMD function uses time domain reflectometry (TDR) to analyze the cabling plant for common cabling problems, such as open circuits, short circuits, and impedance mismatches as well as the distance to the fault. Each of the four twisted pairs is tested separately.

LinkMD operates by sending a pulse of known amplitude and duration down the selected differential pair, then analyzing the polarity and shape of the reflected signal to determine the type of fault: open circuit for a positive/non-inverted amplitude reflection and short circuit for a negative/inverted amplitude reflection. The time duration for the reflected signal to return provides the approximate distance to the cabling fault. The LinkMD function processes this TDR information and presents it as a numerical value that can be translated to a cable distance.

LinkMD is initiated by accessing the LinkMD Cable Diagnostic Register in conjunction with the Auto-MDI/MDI-X Register. The latter register is needed to disable the Auto MDI/MDI-X function before running the LinkMD test. Additionally, a software reset (PHY Soft Reset (RESET) bit in the Basic Control Register = 1) should be performed before and after running the LinkMD test. The reset helps to ensure the KSZ9131MNX is in the normal operating state before and after the test.

Prior to running the cable diagnostics, Auto-negotiation should be disabled, full duplex set and the link speed set to 1000Mbps via the Basic Control Register. The Master-Slave configuration should be set to Slave by writing a value of 0x1000 to the Auto-Negotiation Master Slave Control Register.

To test each individual cable pair, set the cable pair in the Cable Diagnostics Test Pair (VCT_PAIR[1:0]) field of the LinkMD Cable Diagnostic Register, along with setting the Cable Diagnostics Test Enable (VCT_EN) bit. The Cable Diagnostics Test Enable (VCT_EN) bit will self clear when the test is concluded.

The test results (for the pair just tested) are available in the LinkMD Cable Diagnostic Register. The Cable Diagnostics Status (VCT_ST[1:0]) field will indicate a Normal (properly terminated), Open or Short condition.

If the test result was Open or Short, the Cable Diagnostics Data or Threshold (VCT_DATA[7:0]) field indicates the distance to the fault in meters as approximately:

- distance to fault = (VCT_DATA - 22) * 4 / cable propagation velocity

With an accuracy of +/- 2% to 3% for short and medium cables and +/- 5% to 6% for long cables.

**APPLICATION NOTE:** If the Cable Diagnostics Status (VCT_ST[1:0]) field indicates Failed, it is possible the link partner is forced to 100BASE-TX or 1000BASE-T mode.

## 4.16 Self-Test Frame Generation and Checking

The device is capable of generating and checking frames. The device must be connected to a loopback connector or a loopback cable. Pair A should be connected to pair B, and pair C to pair D, as shown in Figure 4-10.

Normally, the device does not require a 125MHz clock to be supplied into the TXC input pin. An external clock may be used when the Self_test_external_clk_sel bit in the Self-Test Enable Register is set high.

Auto-negotiation should be disabled, full duplex set and the desired link speed set via the Basic Control Register.

For 10BASE-T and 100BASE-TX:

- Auto-MDIX should be disabled and the desired configuration (MDI vs. MDIX) selected via the Swap-Off and MDI Set bits in the Auto-MDI/MDI-X Register. Selecting MDI vs. MDIX will test different sections of the PHY.

For 1000BASE-T:

- Set the Master-Slave configuration to master by setting the Master/Slave Manual Configuration Enable and Master/Slave Manual Configuration Value bits in the Auto-Negotiation Master Slave Control Register.
- Enable the 1000BASE-T connector loopback by setting the Ext_lpbk bit in the External Loopback Register.
- Set the Ethernet MAC to 1000 Mbps operation (this is necessary so that a 125MHz clock is provided to the TXC input pin).

The Self-Test mode is enabled by setting a frame count into the Self-Test Packet Count LO Register and Self-Test Packet Count HI Register and then setting the following in order:

- Self_test_frame_cnt_en bit in the Self-Test Frame Count Enable Register
- Self_test_en bit in the Self-Test Enable Register
- Self_test_pgen_en bit in the Self-Test PGEN Enable Register

Once the Self_test_done bit in the Self-Test Status Register is set, the results can be determined through the following:

- Self-Test Correct Count HI Register / Self-Test Correct Count LO Register
- Self-Test Error Count HI Register / Self-Test Error Count LO Register
- Self-Test Bad SFD Count HI Register / Self-Test Bad SFD Count LO Register

## 4.17 NAND Tree Support

The KSZ9131MNX provides parametric NAND tree support for fault detection between chip I/Os and board. NAND tree mode is enabled at power-up/reset with the MODE[3:0] strap-in pins set to ‘0100’. Table 4-9 lists the NAND tree pin order. To test any given pin, the pin is toggled while holding the lower ranked pins low and the higher ranked pins high, causing a toggle on the output of the tree.

**APPLICATION NOTE:** Since the NAND tree output is on the CLK125_NDO pin, the pin must be enabled for output by using the CLK125_EN strap input.

**TABLE 4-9: NAND TREE TEST PIN ORDER FOR KSZ9131**

| Pin | Description |
|---|---|
| LED2 | Input |
| LED1/PME_N1 | Input |
| TXD0 | Input |
| TXD1 | Input |
| TXD2 | Input |


© 2018-2021 Microchip Technology Inc.

**TABLE 4-9: NAND TREE TEST PIN ORDER FOR KSZ9131 (CONTINUED)**

| Pin | Description |
|---|---|
| TXD3 | Input |
| TXD4 | Input |
| TXD5 | Input |
| TXD6 | Input |
| TXD7 | Input |
| TX_ER | Input |
| GTX_CLK | Input |
| TX_EN | Input |
| RXD7 | Input |
| RXD6 | Input |
| RXD5 | Input |
| RXD4 | Input |
| RXD3 | Input |
| RXD2 | Input |
| RXD1 | Input |
| RXD0 | Input |
| RX_DV | Input |
| RX_ER | Input |
| RX_CLK | Input |
| CRS | Input |
| COL | Input |
| INT_N/PME_N2 | Input |
| MDC | Input |
| MDIO | Input |
| TX_CLK | Input |
| CLK125_NDO | Output |

## 4.18 Power Management

The KSZ9131MNX incorporates a number of power-management modes and features that provide methods to consume less energy. These are discussed in the following sections.

### 4.18.1 SMART POWER SAVING

For shorter cable lengths (< ~70 meters) the signal to noise ratio is sufficiently high to allow the reduction of ADC resolution as well as DPS taps, Based on the detected cable length, the device automatically reduces power consumption by approximately 20mW.

### 4.18.2 ENERGY-DETECT POWER-DOWN MODE (EDPD)

Energy-detect power-down (EDPD) mode is used to further reduce the transceiver power consumption when the cable is unplugged. It is enabled by writing a one to the EDPD Mode Enable bit in the EDPD Control Register, and is in effect when auto-negotiation mode is enabled and the cable is disconnected (no link).

In EDPD Mode, the KSZ9131MNX shuts down all transceiver blocks, except for the transmitter and energy detect circuits. Power can be reduced further by extending the time interval between the transmissions of link pulses to check for the presence of a link partner. The periodic transmission of link pulses is needed to ensure the KSZ9131MNX and its link partner, when operating in the same low-power state and with Auto MDI/MDI-X disabled, can wake up when the cable is connected between them. By default, EDPD mode is disabled after power-up. Previous register setting are maintained when EDPD mode is cleared. EDPD operation may be adjusted via the p_edpd_mask_timer[1:0], p_edpd_timer[1:0] and p_EDPD_random_dis fields in the EDPD Control Register within the MMD address space.

### 4.18.3 SOFTWARE POWER-DOWN MODE (SPD)

The KSZ9131MNX supports a software power down (SPD) mode. This mode is used to power down the device when it is not in use after power-up. Software power-down mode is enabled by writing a one to the Power Down bit in the Basic Control Register. The device exits the SPD state after a zero is written to the Power Down bit.

In the SPD state, the device disables most internal functions.

During SPD, the crystal oscillator and PLL are enabled and the internal (125MHz and 250MHz) clocks are gated, The standard registers (0 through 31) and the MII Management Interface operate using the crystal clock.

Previous register settings are maintained during and following the removal of SPD.

**APPLICATION NOTE:** The internal (125MHz and 250MHz) clock gating maybe overridden by setting the spd_clock_gate_override bit in the Software Power Down Control Register at the cost of increased power.

The following remain operational during SPD:

- MII Management Interface
  - Only access to the standard registers (0 through 31) is supported.
  - Access to MMD address spaces other than MMD address space 1 is possible if the spd_clock_gate_override bit is set.
  - Access to MMD address space 1 is not possible.
- Voltage Regulator Controller (LDO)
  - The LDO controller can be disabled by setting the active low LDO enable bit in LDO Control Register. An external source of 1.2V is necessary for operation in this case.
- PLL
  - Normally the PLL is enabled during SPD. It may be disabled by setting the spd_pll_disable bit described in Section 4.18.3.1, "SPD Extra Power Savings".
- Crystal Oscillator
  - Normally the Crystal Oscillator is enabled during SPD. It may be disabled by setting the XTAL Disable bit described in Section 4.18.3.1, "SPD Extra Power Savings".

The following are normally disabled during SPD:

- TX and RX clocks
  - If the above mentioned spd_clock_gate_override bit is set, TX and RX clocks would be enabled. They may alternately be stopped by setting the Isolate (PHY_ISO) bit in the Basic Control Register.
- CLK125_NDO pin
  - If the above mentioned spd_clock_gate_override bit is set, CLK125_NDO would be enabled (if previously enabled for clock output). It may alternately be disabled by clearing the clk125 Enable bit in Common Control Register

#### 4.18.3.1 SPD Extra Power Savings

To achieve a lower power usage, the PLL maybe disable during SPD by setting the spd_pll_disable bit in the Software Power Down Control Register prior to entering SPD.

**APPLICATION NOTE:** A full device reset occurs following the removal of SPD, therefore previous register settings are not maintained for this option.

To further reduce power usage, the crystal oscillator maybe disable by setting the XTAL Disable bit in the XTAL Control Register after setting the spd_pll_disable bit and entering SPD.

Since the MII Management Interface operates using the crystal clock, once this bit is set, the device will become inaccessible. A pin reset or power cycle is required to resume operation.


© 2018-2021 Microchip Technology Inc.

### 4.18.4 CHIP POWER-DOWN MODE (CPD)

This mode provides the lowest power state for the KSZ9131MNX device when it is mounted on the board but not in use. Chip power-down (CPD) mode is enabled after power-up/reset with the MODE[3:0] strap-in pins set to '0111'. Chip power-down mode can only be exited by removing device power.

## 4.19 Energy Efficient Ethernet

The KSZ9131MNX implements Energy Efficient Ethernet (EEE), as described in IEEE Standard 802.3az. The Standard is defined around an EEE-compliant MAC on the host side and an EEE-compliant link partner on the line side that support the special signaling associated with EEE. EEE saves power by keeping the AC signal on the copper Ethernet cable at approximately 0V peak-to-peak as often as possible during periods of no traffic activity, while maintaining the link-up status. This is referred to as low-power idle (LPI) mode or state.

The KSZ9131MNX has the EEE function enabled as the power-up default setting. The EEE function can be disabled by configuring the following EEE advertisement bits in the EEE Advertisement Register, followed by restarting auto-negotiation (writing a '1' to the Restart Auto-Negotiation (PHY_RST_AN) bit in the Basic Control Register:


- 1000BASE-T EEE bit = 0 // Disable 1000 Mbps EEE mode
- 100BASE-TX EEE bit = 0 // Disable 100 Mbps EEE mode

During LPI mode, the copper link responds automatically when it receives traffic and resumes normal PHY operation immediately, without blockage of traffic or loss of packet. This involves exiting LPI mode and returning to normal 100/1000 Mbps operating mode. The LPI state is controlled independently for transmit and receive paths, allowing the LPI state to be active (enabled) for:

- Transmit cable path only
- Receive cable path only
- Both transmit and receive cable paths

During LPI mode, refresh transmissions are used to maintain the link; power savings occur in quiet periods. Approximately every 20 to 22 milliseconds, a refresh transmission of 200 to 220 microseconds is sent to the link partner. The refresh transmissions and quiet periods are shown in Figure 4-11.

**FIGURE 4-11: LPI MODE (REFRESH TRANSMISSIONS AND QUIET PERIODS)**

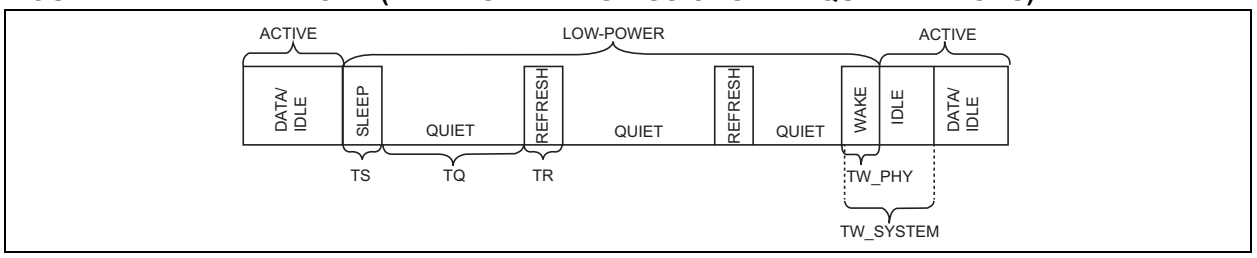



### 4.19.1 TRANSMIT DIRECTION CONTROL (MAC-TO-PHY)

The KSZ9131MNX enters LPI mode for the transmit direction when its attached EEE-compliant MAC de-asserts TX_EN, asserts TX_ER, and sets TXD[7:0] to 0000_0001 for GMII (1000 Mbps) or TXD[3:0] to 0001 for MII (100 Mbps). The KSZ9131MNX remains in the transmit LPI state while the MAC maintains the states of these signals. When the MAC changes any of the TX_EN, TX_ER, or TX data signals from their LPI state values, the KSZ9131MNX exits the LPI transmit state.

For GMII (1000 Mbps), the GTX_CLK clock can be stopped by the MAC to save additional power, after the GMII signals for the LPI state have been asserted for nine or more GTX_CLK clock cycles.

Figure 4-12 shows the LPI transition for GMII transmit.


**FIGURE 4-12: LPI TRANSITION - GMII (1000 MBPS) TRANSMIT**

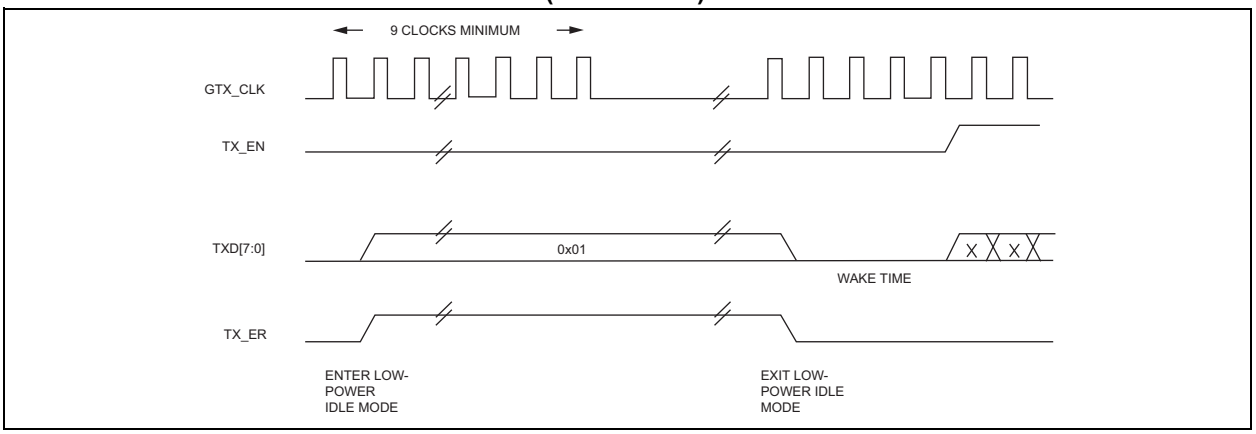


For MII (100 Mbps), the TX_CLK is not stopped, because it is sourced from the PHY and is used by the MAC for MII transmit.

Figure 4-13 shows the LPI transition for MII transmit.

**FIGURE 4-13: LPI TRANSITION - MII (100 MBPS) TRANSMIT**

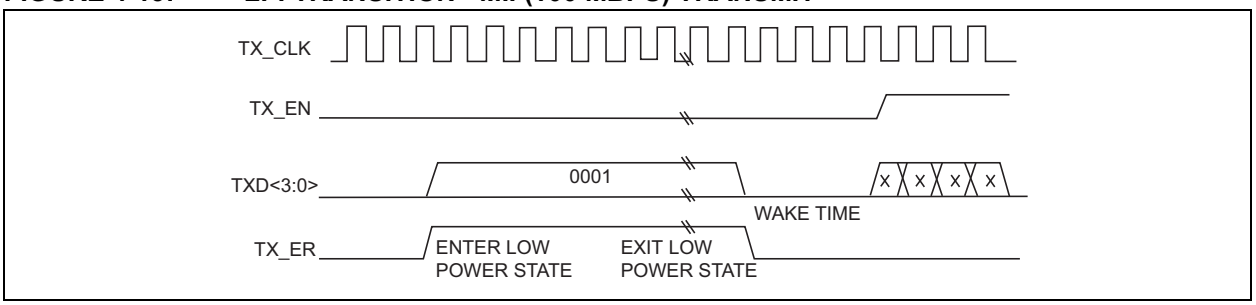


### 4.19.2 RECEIVE DIRECTION CONTROL (PHY-TO-MAC)


The KSZ9131MNX enters LPI mode for the receive direction when it receives the /P/ code bit pattern (Sleep/Refresh) from its EEE-compliant link partner. It then de-asserts RX_DV, asserts RX_ER, and drives RXD[7:0] to 0000_0001 for GMII (1000 Mbps) or RXD[3:0] to 0001 for MII (100 Mbps). The KSZ9131MNX remains in the receive LPI state while it continues to receive the refresh from its link partner, so it will continue to maintain and drive the LPI output states for the GMII/MII receive signals to inform the attached EEE-compliant MAC that it is in the receive LPI state. When the KSZ9131MNX receives a non /P/ code bit pattern (non-refresh), it exits the receive LPI state and sets the RX_DV, RX_ER, and RX data signals to set a normal frame or normal idle.

For GMII (1000 Mbps), the KSZ9131MNX stops the RX_CLK clock output to the MAC after nine or more RX_CLK clock cycles have occurred in the receive LPI state, to save more power. The Clock-stop enable bit in the PCS Control 1 Register controls if the device stops the RX_CLK clock output.

Figure 4-14 shows the LPI transition for GMII receive.


© 2018-2021 Microchip Technology Inc.


**FIGURE 4-14: LPI TRANSITION - GMII (1000 MBPS) RECEIVE**

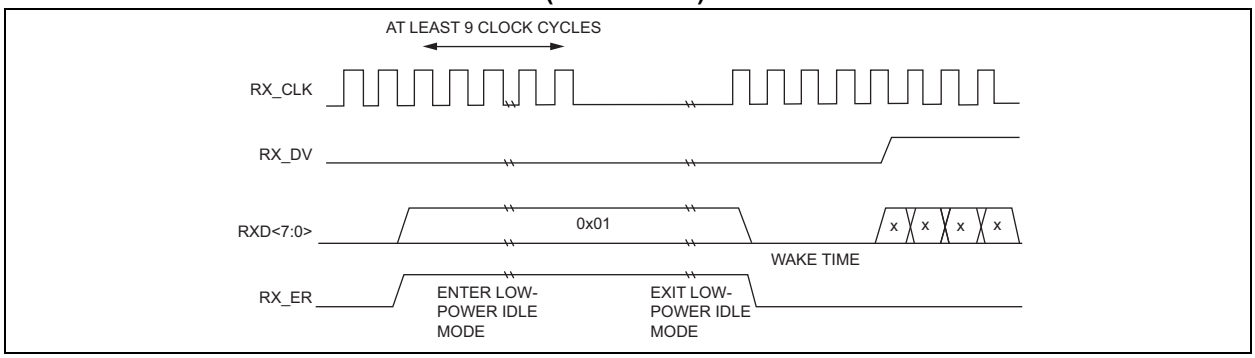


Similarly, for MII (100 Mbps), the KSZ9131MNX stops the RX_CLK clock output to the MAC after nine or more RX_CLK clock cycles have occurred in the receive LPI state, to save more power. The Clock-stop enable bit in the PCS Control 1 Register controls if the device stops the RX_CLK clock output.

Figure 4-15 shows the LPI transition for MII receive.

**FIGURE 4-15: LPI TRANSITION - MII (100 MBPS) RECEIVE**

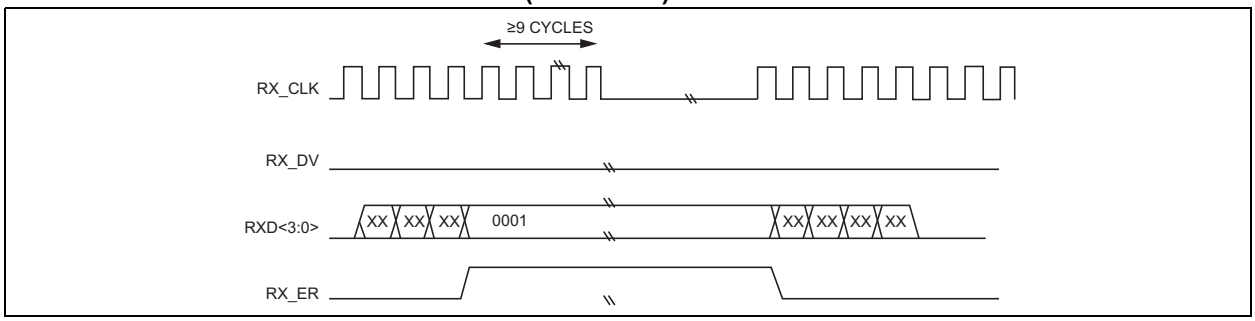


### 4.19.3 10BASE-Te MODE

For standard (non-EEE) 10BASE-T mode, normal link pulses (NLPs) with long periods of no AC signal transmission are used to maintain the link during the idle period when there is no traffic activity. To save more power, the device provides the option to enable 10BASE-Te mode, which saves additional power by reducing the transmitted signal amplitude from 2.5V to 1.75V. 10BASE-Te mode is enabled by default and can be disabled by setting the p_cat3 bit in the AFED Control Register in MMD space.

### 4.19.4 REGISTERS ASSOCIATED WITH EEE

The following MMD registers are provided for EEE configuration and management:

- MMD Address 3h, Register 0h — PCS Control 1 Register
- MMD Address 3h, Register 1h — PCS Status 1 Register
- MMD Address 7h, Register 3Ch — EEE Advertisement Register
- MMD Address 7h, Register 3Dh — EEE Link Partner Ability Register

## 4.20 Dynamic Channel Quality (DCQ) (TC1)

The KSZ9131MNX provides dynamic channel quality features that include Mean Square Error (MSE), Signal Quality Indicator (SQI), and peak Mean Square Error (pMSE) values. These features are designed to be compliant with Sections 6.1.1, 6.1.2, and 6.1.3 of the *OPEN Alliance TC1 - Advanced diagnostics features for 100BASE-T1 automotive Ethernet PHYs Version 1.0* specification, respectively. These DCQ features are detailed in the following sections:

- Mean Square Error (MSE)
- Signal Quality Indicator (SQI)
- Peak Mean Square Error (pMSE)

MLT-3 modulation is used for data transmission in 100BASE-TX and PAM5 modulation is used for data transmission in 1000BASE-T.

Logically, 100BASE-TX (MLT-3) and 1000BASE-T (PAM5) have signal values of {-1, 0, +1} and {-2, -1, 0, +1, +2}, respectively. These logic levels are mapped to slicer reference levels of {-128, 0, 128} for 100BASE-TX and {-128, -64, 0, 64, 128} for 1000BASE-T. The middle points (the compare thresholds) are {-64, 64} for 100BASE-TX and are {-96, -32, 32, 96} for 1000BASE-T.

Ideally, each receive data sample would be the maximum distance from the compare thresholds, with error values of 0. But because of noise and imperfection in real applications, the sampled data may be off from its ideal. The closer to the compare threshold, the worse the signal quality.

The slicer error is a measurement of how far the processed data off from its ideal location. The largest instantaneous slicer error for 1000BASE-T is +/-32. The largest instantaneous slicer error for 100BASE-TX is +/-64. A higher absolute slicer error means a degraded signal receiving condition.

### 4.20.1 MEAN SQUARE ERROR (MSE)

This section defines the implementation of section 6.1.1 of the TC1 specification. The KSZ9131MNX can provide detailed information of the dynamic signal quality by means of a MSE value. This mode is enabled by setting the sqi_enable bit in the DCQ Configuration Register. This bit must be set for all DCQ measurements.

With this method, the slicer error is converted into a squared value and then filtered by a programmable low pass filter. This is similar to taking the average of absolute slicer error over a long moving time window. For each data sample, the difference between the absolute slicer error (scaled by x2 (before squaring) for 1000BASE-T) and the current filtered value is added back into the current filtered value.

**Note:** The sqi_squ_mode_en bit in the DCQ Configuration Register must be set to choose square mode.

The sqi_kp field in the DCQ Configuration Register sets the weighting of the add back as a divide by $2^{\wedge sqi_kp}$, effectively setting the filter bandwidth. As the sqi_kp value is increased, the weighing is decreased, and the mean slicer error value takes a longer time to settle to a stable value. Also as the sqi_kp value is increased, there will be less variation in the mean slicer error value reported.

The scale611 field in the DCQ Configuration Register is used to set a divide by factor (divide by $2^{\wedge scale611)}$ such that the MSE value is linearly scaled to the range of 0 to 511. If the divide by factor is too small, the MSE value is capped at a maximum of 511.

In order to capture the MSE Value, the DCQ Read Capture bit in the DCQ Configuration Register needs to be written as a high with the desired cable pair specified in the DCQ Channel Number field of the same register. The DCQ Read Capture bit will immediately self-clear and the result will be available in the DCQ Mean Square Error Register. The filtered error value is saved every 1.0 ms (125,000 symbols).

In addition to the current MSE Value, the worst case MSE value since the last read of DCQ Mean Square Error Register is stored in DCQ Mean Square Error Worst Case Register.

### 4.20.2 SIGNAL QUALITY INDICATOR (SQI)

The KSZ9131MNX provides two SQI methods:

- SQI Method A: TC1 Section 6.1.2 compliant
- SQI Method B: Proprietary method

#### 4.20.2.1 SQI Method A

This section defines the implementation of section 6.1.2 of the TC1 specification. This mode builds upon the Mean Square Error (MSE) method by mapping the MSE value onto a simple quality index. This mode is enabled by setting the sqi_enable bit, in the DCQ Configuration Register.

**Note:** As in the Mean Square Error (MSE) method, the sqi_squ_mode_en bit in the DCQ Configuration Register must be set to choose square mode and the scale611 field in the DCQ Configuration Register is used to set the divide by factor (divide by $2^{\wedge scale611)}$ such that the MSE value is linearly scaled to the range of 0 to 511.

The MSE value is compared to the thresholds set in the DCQ SQI Table Registers to provide a SQI value between 0 (worst value) and 7 (best value) as follows:


© 2018-2021 Microchip Technology Inc.

**TABLE 4-10: MSE TO SQI MAPPING**

| MSE Value | | SQI Value |
|---|---|---|
| Greater Than | Less Than or Equal To | |
| | SQI_TBL7.SQI_VALUE | 7 |
| SQI_TBL7.SQI_VALUE | SQI_TBL6.SQI_VALUE | 6 |
| SQI_TBL6.SQI_VALUE | SQI_TBL5.SQI_VALUE | 5 |
| SQI_TBL5.SQI_VALUE | SQI_TBL4.SQI_VALUE | 4 |
| SQI_TBL4.SQI_VALUE | SQI_TBL3.SQI_VALUE | 3 |
| SQI_TBL3.SQI_VALUE | SQI_TBL2.SQI_VALUE | 2 |
| SQI_TBL2.SQI_VALUE | SQI_TBL1.SQI_VALUE | 1 |
| SQI_TBL1.SQI_VALUE | | 0 |

In order to capture the SQI value, the DCQ Read Capture bit in the DCQ Configuration Register needs to be written as a high with the desired cable pair specified in the DCQ Channel Number field of the same register. The DCQ Read Capture bit will immediately self-clear and the result will be available in the DCQ SQI Register.

In addition to the current SQI the worst case (lowest) SQI since the last read is available in the SQI Worst Case field.

The correlation between the SQI values stored in the DCQ SQI Register and an according signal to noise ratio (SNR) based on AWG noise (bandwidth of 80MHz) is shown in Table 4-11. The bit error rates to be expected in the case of white noise as interference signal is shown in the table as well for information purposes.

A link loss only occurs if the SQI value is 0.

**TABLE 4-11: SQI VALUE CORRELATION**

| SQI Value | SNR Value @ MDI - AWG Noise | Recommended BER for AWG Noise Model |
|---|---|---|
| 0 | < 18 dB | BER>10^-10 |
| 1 | 18 dB <= SNR < 19 dB | |
| 2 | 19 dB <= SNR < 20 dB | |
| 3 | 20 dB <= SNR < 21 dB | BER<10^-10 |
| 4 | 21 dB <= SNR < 22 dB | |
| 5 | 22 dB <= SNR < 23 dB | |
| 6 | 23 dB <= SNR < 24 dB | |
| 7 | SNR <= 24 dB | |

#### 4.20.2.2 SQI Method B

With the SQI Method B, the slicer error is converted into an absolute value and then filtered by a programmable low pass filter. This is similar to taking the average of absolute slicer error over a long moving time window. This mode is enabled by setting the sqi_enable bit, in the DCQ Configuration Register.

For each data sample, the difference between the absolute slicer error (scaled by x2 (before squaring) for 1000BASE-T) and the current filtered value is added back into the current filtered value. The sqi_squ_mode_en bit in the DCQ Configuration Register is used to square the (scaled) slicer error.

The sqi_kp field in the DCQ Configuration Register sets the weighting of the add back as a divide by $2^{\wedge sqi_kp}$, effectively setting the filter bandwidth. As the sqi_kp value is increased, the weighing is decreased, and the mean slicer error value takes a longer time to settle to a stable value. Also as the sqi_kp value is increased, there will be less variation in the mean slicer error value reported.

In order to capture the current error value, the DCQ Read Capture bit in the DCQ Configuration Register needs to be written as a high with the desired cable pair specified in the DCQ Channel Number field of the same register. The DCQ Read Capture bit immediately self-clears and the result is available in the Mean Slicer Error Register. The filtered error value is saved every 1.0 ms (125,000 symbols).

A software based lookup table (derived empirically in lab conditions) may be used to report a SQI number.

### 4.20.3 PEAK MEAN SQUARE ERROR (PMSE)

This section defines the implementation of section 6.1.3 of the TC1 specification. The peak MSE value is intended to identify transient disturbances which are typically in the microsecond range. This mode is enabled by setting the sqi_enable bit, in the DCQ Configuration Register.

With this method, the slicer error is converted into a squared value and then filtered by a programmable low pass filter. This is similar to taking the average of absolute slicer error over a moving time window.

For each data sample, the difference between the absolute slicer error (scaled by x2 (before squaring) for 1000BASE-T) and the current filtered value is added back into the current filtered value.

**Note:** The sqi_squ_mode_en bit in the DCQ Configuration Register must be set to choose square mode.

The sqi_kp3 field in the DCQ Configuration Register sets the weighting of the add back as a divide by $2^{\wedge(sqi_kp3)}$, effectively setting the filter bandwidth. As the sqi_kp3 value is increased, the weighing is decreased, and the mean slicer error value takes a longer time to settle to a stable value.

Every 1.0ms (125,000 symbols), the highest filtered value over that previous 1.0ms period is saved.

The scale613 field in the DCQ Configuration Register is used to set a divide by factor (divide by $2^{\wedge scale613+3)}$ such that the peak MSE value is linearly scaled to the range of 0 to 63. If the divided by factor is too small, the peak MSE value is capped at a maximum of 63.

In order to capture the Peak MSE Value, the DCQ Read Capture bit in the DCQ Configuration Register needs to be written as a high with the desired cable pair specified in the DCQ Channel Number field of the same register. The DCQ Read Capture bit will immediately self-clear and the result will be available in the DCQ Peak MSE Register.

In addition to the current Peak MSE Value the worst case Peak MSE value since the last read of DCQ Peak MSE Register is stored in the same register.

## 4.21 Quiet-WIRE® EMI Reduction

Quiet-WIRE® patented technology, delivers fully programmable, integrated noise filtering to reduce Ethernet line emissions without need for additional external BoM components.

Quiet-WIRE® is enabled by setting the Quiet-WIRE Enable bit in MMD31 Register 19. Once the Quiet-WIRE Enable bit is set, the transmit parameters must be configured through the EMITX Control Register and EMITX Coefficient Registers in MMD address space. The values must be set as shown in the default column.

Quiet-WIRE® applies only to 100BASE-TX.

## 4.22 Wake-On-LAN

Wake-On-LAN (WOL) is normally a MAC-based function to wake up a host system (for example, an Ethernet end device, such as a PC) that is in standby power mode. Wake-up is triggered by receiving and detecting a special packet (commonly referred to as the “magic packet”) that is sent by the remote link partner. The KSZ9131MNX can perform the same WOL function if the MAC address of its associated MAC device is entered into the KSZ9131MNX PHY registers for magic-packet detection. When the KSZ9131MNX detects the magic packet, it wakes up the host by driving its power management event (PME) output pin low.

By default, the WOL function is disabled. It is enabled by setting the enabling bit and configuring the associated registers for the selected PME wake-up detection method.

The KSZ9131MNX provides three methods to trigger a PME wake-up:

- Magic-packet detection
- Customized-packet detection
- Link status change detection

### 4.22.1 MAGIC-PACKET DETECTION

The magic packet’s frame format starts with 6 bytes of 0xFFh and is followed by 16 repetitions of the MAC address of its associated MAC device (local MAC device).

When the magic packet is detected from its link partner, the KSZ9131MNX asserts its PME output pin low.

The following MMD registers are provided for magic-packet detection:

- Magic-packet detection is enabled by writing a ‘1’ to the Enable Magic Packet Detection Wake Event bit of the


© 2018-2021 Microchip Technology Inc.

Wake-On-LAN Control Register

- The MAC address (for the local MAC device) is written to and stored in the Wake-On-LAN-MAC-LO Register, Wake-On-LAN-MAC-MI Register, and Wake-On-LAN-MAC-HI Register

The KSZ9131MNX does not generate the magic packet. The magic packet must be provided by the external system. Magic packet detection status can be read from the Wake-on-LAN Magic Packet Receive Status Register.

### 4.22.2 CUSTOMIZED-PACKET DETECTION

The customized packet has associated register/bit masks to select which byte, or bytes, of the first 64 bytes of the packet to use in the CRC calculation. After the KSZ9131MNX receives the packet from its link partner, the selected bytes for the received packet are used to calculate the CRC. The calculated CRC is compared to the expected CRC value that was previously written to and stored in the KSZ9131MNX PHY registers. If there is a match, the KSZ9131MNX asserts its PME output pin low.

Four customized packets are provided to support four types of wake-up scenarios. A dedicated set of registers is used to configure and enable each customized packet.

The following MMD registers are provided for customized-packet detection:

- Each of the four customized packets is enabled via the Enable Customized Frame Filter Wake Event field of the Wake-On-LAN Control Register,
  - Bit [2] // For customized packets, type 0
  - Bit [3] // For customized packets, type 1
  - Bit [4] // For customized packets, type 2
  - Bit [5] // For customized packets, type 3
- 32-bit expected CRCs are written to and stored in:
  - Customized-Pkt-0-CRC-LO Register and Customized-Pkt-0-CRC-HI Register (Type 0 customized packets)
  - Customized-Pkt-1-CRC-LO Register and Customized-Pkt-1-CRC-HI Register (Type 1 customized packets)
  - Customized-Pkt-2-CRC-LO Register and Customized-Pkt-2-CRC-HI Register (Type 2 customized packets)
  - Customized-Pkt-3-CRC-LO Register and Customized-Pkt-3-CRC-HI Register (Type 3 customized packets)
- Masks to indicate which of the first 64-bytes to use in the CRC calculation are set in:
  - Customized-Pkt-0-MASK_LL Register, Customized-Pkt-0-MASK_LH Register, Customized-Pkt-0-MASK_HL Register, and Customized-Pkt-0-MASK_HH Register (Type 0 customized packets)
  - Customized-Pkt-1-MASK_LL Register, Customized-Pkt-1-MASK_LH Register, Customized-Pkt-1-MASK_HL Register, and Customized-Pkt-1-MASK_HH Register (Type 1 customized packets)
  - Customized-Pkt-2-MASK_LL Register, Customized-Pkt-2-MASK_LH Register, Customized-Pkt-2-MASK_HL Register, and Customized-Pkt-2-MASK_HH Register (Type 2 customized packets)
  - Customized-Pkt-3-MASK_LL Register, Customized-Pkt-3-MASK_LH Register, Customized-Pkt-3-MASK_HL Register, and Customized-Pkt-3-MASK_HH Register (Type 3 customized packets)

### 4.22.3 LINK STATUS CHANGE DETECTION

If link status change detection is enabled, the KSZ9131MNX asserts its PME output pin low whenever there is a link status change using the following bits in the Wake-On-LAN Control Register:

- Enable Link Up Wake Event // For link-up detection
- Enable Link Down Wake Event // For link-down detection

The link change status can be read from the Interrupt Control/Status Register.

### 4.22.4 PME OUTPUT SIGNAL

The PME output signal is available on either LED1 as PME_N1 or INT_N as PME_N2, and is selected and enabled using the gmii_pme_on_led1_mode and gmii_pme_on_int_mode fields in the Operation Mode Strap Override Register.

Additionally, the PME Output Select field in the Wake-On-LAN Control Register defines the output functions for PME_N1 and PME_N2.

When asserted, the PME output is cleared by disabling the register bit that enabled the PME trigger source (magic packet, customized packet, link status change).

The PME output is active low.

**Note:** When mapped to INT_N, the polarity can be inverted by use of the Interrupt Polarity Invert bit in the Control Register.

**APPLICATION NOTE:** When mapped to LED1, Enhanced LED mode must be disabled.


© 2018-2021 Microchip Technology Inc.

# 5.0 REGISTER DESCRIPTIONS

This chapter describes the various control and status registers (CSRs).

**Note: RESERVED address space must not be written under any circumstances. Failure to heed this warning may result in untoward operation and unexpected results.**

## 5.1 Register Map

The register space within the KSZ9131MNX consists of two distinct areas.

- Standard Registers (Direct register access)
- MDIO Manageable Device (MMD) Registers (Indirect register access)

The KSZ9131MNX supports the following standard registers. These registers are accessed through the SMI (MDIO/MDC) interface.

**TABLE 5-1: STANDARD REGISTERS**

| Index (in decimal) | Index (in hex) | Register Name |
|---|---|---|
| **IEEE-Defined Registers** | | |
| 0 | 0 | Basic Control Register |
| 1 | 1 | Basic Status Register |
| 2 | 2 | Device Identifier 1 Register |
| 3 | 3 | Device Identifier 2 Register |
| 4 | 4 | Auto-Negotiation Advertisement Register |
| 5 | 5 | Auto-Negotiation Link Partner Base Page Ability Register |
| 6 | 6 | Auto-Negotiation Expansion Register |
| 7 | 7 | Auto-Negotiation Next Page TX Register |
| 8 | 8 | Auto-Negotiation Next Page RX Register |
| 9 | 9 | Auto-Negotiation Master Slave Control Register |
| 10 | Ah | Auto-Negotiation Master Slave Status Register |
| 11-12 | Bh-Ch | RESERVED |
| 13 | Dh | MMD Access Control Register |
| 14 | Eh | MMD Access Address/Data Register |
| 15 | Fh | Extended Status Register |
| **Vendor-Specific Registers** | | |
| 16 | 10h | RESERVED |
| 17 | 11h | Remote Loopback Register |
| 18 | 12h | LinkMD Cable Diagnostic Register |
| 19 | 13h | Digital PMA/PCS Status Register |
| 20 | 14h | RESERVED |
| 21 | 15h | RXER Counter Register |
| 22 | 16h | LED Mode Select Register |
| 23 | 17h | LED Behavior Register |
| 24 | 18h | RESERVED |
| 25 | 19h | MDIO Drive Register |
| 26 | 1Ah | KSZ9031 LED Mode Register |
| 27 | 1Bh | Interrupt Control/Status Register |
| 28 | 1Ch | Auto-MDI/MDI-X Register |
| 29 | 1Dh | Software Power Down Control Register |
| 30 | 1Eh | External Loopback Register |
| 31 | 1Fh | Control Register |

The device supports the following MMD device addresses and their associated register addresses, which make up the indirect MMD registers.

**TABLE 5-2: MMD CONTROL AND STATUS REGISTERS MAP**

| MMD Device Address (in decimal) | Index (in decimal) | Index (in hex) | Register Name |
|---|---|---|---|
| 1 | 225 | E1h | Mean Slicer Error Register |
| | 226 | E2h | DCQ Mean Square Error Register |
| | 227 | E3h | DCQ Mean Square Error Worst Case Register |
| | 228 | E4h | DCQ SQI Register |
| | 229 | E5h | DCQ Peak MSE Register |
| | 230 | E6h | DCQ Control Register |
| | 231 | E7h | DCQ Configuration Register |
| | 232-238 | E8h-EEh | DCQ SQI Table Registers |
| 2 | 0 | 0h | Common Control Register |
| | 1 | 1h | Strap Status Register |
| | 2 | 2h | Operation Mode Strap Override Register |
| | 3 | 3h | Operation Mode Strap Register |
| | 4 | 4h | Clock Invert and Control Signal Pad Skew Register |
| | 5-7 | 5h-7h | RESERVED |
| | 8 | 8 | Clock Pad Skew Register |
| | 9 | 9 | Self-Test Packet Count LO Register |
| | 10 | Ah | Self-Test Packet Count HI Register |
| | 11 | Bh | Self-Test Status Register |
| | 12 | Ch | Self-Test Frame Count Enable Register |
| | 13 | Dh | Self-Test PGEN Enable Register |
| | 14 | Eh | Self-Test Enable Register |
| | 15 | Fh | RESERVED |
| | 16 | 10h | Wake-On-LAN Control Register |
| | 17 | 11h | Wake-On-LAN-MAC-LO Register |
| | 18 | 12h | Wake-On-LAN-MAC-MI Register |
| | 19 | 13h | Wake-On-LAN-MAC-HI Register |
| | 20 | 14h | Customized-Pkt-0-CRC-LO Register |
| | 21 | 15h | Customized-Pkt-0-CRC-HI Register |
| | 22 | 16h | Customized-Pkt-1-CRC-LO Register |
| | 23 | 17h | Customized-Pkt-1-CRC-HI Register |
| | 24 | 18h | Customized-Pkt-2-CRC-LO Register |
| | 25 | 19h | Customized-Pkt-2-CRC-HI Register |
| | 26 | 1Ah | Customized-Pkt-3-CRC-LO Register |
| | 27 | 1Bh | Customized-Pkt-3-CRC-HI Register |
| | 28 | 1Ch | Customized-Pkt-0-MASK_LL Register |
| | 29 | 1Dh | Customized-Pkt-0-MASK_LH Register |
| | 30 | 1Eh | Customized-Pkt-0-MASK_HL Register |
| | 31 | 1Fh | Customized-Pkt-0-MASK_HH Register |
| | 32 | 20h | Customized-Pkt-1-MASK_LL Register |
| | 33 | 21h | Customized-Pkt-1-MASK_LH Register |


© 2018-2021 Microchip Technology Inc.

**TABLE 5-2: MMD CONTROL AND STATUS REGISTERS MAP (CONTINUED)**

| MMD Device Address (in decimal) | Index (in decimal) | Index (in hex) | Register Name |
|---|---|---|---|
| 2 (cont.) | 34 | 22h | Customized-Pkt-1-MASK_HL Register |
| | 35 | 23h | Customized-Pkt-1-MASK_HH Register |
| | 36 | 24h | Customized-Pkt-2-MASK_LL Register |
| | 37 | 25h | Customized-Pkt-2-MASK_LH Register |
| | 38 | 26h | Customized-Pkt-2-MASK_HL Register |
| | 39 | 27h | Customized-Pkt-2-MASK_HH Register |
| | 40 | 28h | Customized-Pkt-3-MASK_LL Register |
| | 41 | 29h | Customized-Pkt-3-MASK_LH Register |
| | 42 | 2Ah | Customized-Pkt-3-MASK_HL Register |
| | 43 | 2Bh | Customized-Pkt-3-MASK_HH Register |
| | 44 | 2Ch | Wake-on-LAN Control Status Register |
| | 45 | 2Dh | Wake-on-LAN Custom Packet Receive Status Register |
| | 46 | 2Eh | Wake-on-LAN Magic Packet Receive Status Register |
| | 47 | 2Fh | Wake-on-LAN Data Module Status Register |
| | 48 | 30h | Customized Pkt-0 Received CRC-L Register |
| | 49 | 31h | Customized Pkt-0 Received CRC-H Register |
| | 50 | 32h | Customized Pkt-1 Received CRC-L Register |
| | 51 | 33h | Customized Pkt-1 Received CRC-H Register |
| | 52 | 34h | Customized Pkt-2 Received CRC-L Register |
| | 53 | 35h | Customized Pkt-2 Received CRC-H Register |
| | 54 | 36h | Customized Pkt-3 Received CRC-L Register |
| | 55 | 37h | Customized Pkt-3 Received CRC-H Register |
| | 56-59 | 38h-3B | RESERVED |
| | 60 | 3Ch | Self-Test Correct Count LO Register |
| | 61 | 3Dh | Self-Test Correct Count HI Register |
| | 62 | 3Eh | Self-Test Error Count LO Register |
| | 63 | 3Fh | Self-Test Error Count HI Register |
| | 64 | 40h | Self-Test Bad SFD Count LO Register |
| | 65 | 41h | Self-Test Bad SFD Count HI Register |

**TABLE 5-2: MMD CONTROL AND STATUS REGISTERS MAP (CONTINUED)**

| MMD Device Address (in decimal) | Index (in decimal) | Index (in hex) | Register Name |
|---|---|---|---|
| 3 | 0 | 0 | PCS Control 1 Register |
| | 1 | 1 | PCS Status 1 Register |
| | 8 | 8 | EEE Quiet Timer Register |
| | 9 | 9 | EEE Update Timer Register |
| | 10 | Ah | EEE Link-Fail Timer Register |
| | 11 | Bh | EEE Post-Update Timer Register |
| | 12 | Ch | EEE WaitWQ Timer Register |
| | 13 | Dh | EEE Wake Timer Register |
| | 14 | Eh | EEE WakeTX Timer Register |
| | 15 | Fh | EEE WakeMz Timer Register |
| | 16 | 10h | RESERVED |
| | 20 | 14h | EEE Control and Capability Register |
| | 22 | 16h | EEE Wake Error Counter Register |
| | 24 | 18h | EEE 100 Timer-0 Register |
| | 25 | 19h | EEE 100 Timer-1 Register |
| | 26 | 1Ah | EEE 100 Timer-2 Register |
| | 27 | 1Bh | EEE 100 Timer-3 Register |
| 7 | 60 | 3Ch | EEE Advertisement Register |
| | 61 | 3Dh | EEE Link Partner Ability Register |
| | 62 | 3Eh | EEE Link Partner Ability Override Register |
| | 63 | 3Fh | EEE Message Code Register |
| 28 (1Ch) | 1 | 1h | XTAL Control Register |
| | 2-8 | 2h-8h | RESERVED |
| | 9 | 9h | AFED Control Register |
| | 10-13 | Ah-Dh | RESERVED |
| | 14 | Eh | LDO Control Register |
| | 15-35 | Fh-23h | RESERVED |
| | 36 | 24h | EDPD Control Register |
| | 37 | 25h | EMITX Control Register |
| | 38-52 | 26h-34h | EMITX Coefficient Registers |
| 31 (1Fh) | 19 | 13h | MMD31 Register 19 |


© 2018-2021 Microchip Technology Inc.

## 5.2 Standard Registers

Standard registers provide direct read/write access to a 32-register address space, as defined in Clause 22 of the IEEE 802.3 Specification. Within this address space, the first 16 registers (Registers 0 to 15 (Fh)) are defined according to the IEEE specification, while the remaining 16 registers (Registers 16 (10h) to 31 (1Fh)) are defined specific to the PHY vendor.

### 5.2.1 BASIC CONTROL REGISTER

Index (In Decimal): 0 Size: 16 bits

This read/write register is used to configure the PHY.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **PHY Soft Reset (RESET)**<br>When set, this bit resets all the PHY and all its registers to their default state. This bit is self clearing.<br><br>1 = PHY software reset. | R/W1S/ SC | 0b |
| 14 | **Loopback (PHY_LOOPBACK)**<br>This bit enables/disables the loopback mode. When enabled, transmissions are not sent to network. Instead, they are looped back into the PHY.<br><br>0 = Loopback mode disabled (normal operation)<br>1 = Loopback mode enabled | R/W | 0b |
| 13 | **Speed Select[0]**<br>Together with Speed Select[1], sets speed per the following table:<br><br>[Speed Select1][Speed Select0]<br>00 = 10Mbps<br>01 = 100Mbps<br>10 = 1000Mbps<br>11 = Reserved<br>**Note:** Ignored if the Auto-Negotiation Enable bit of this register is 1. | R/W | 0b |
| 12 | **Auto-Negotiation Enable**<br>This bit enables/disables Auto-Negotiation.<br><br>0 = disable auto-negotiate process<br>1 = enable auto-negotiate process (overrides the Speed Select[0], Speed Select[1] and Duplex Mode bits of this register) | R/W | 1b |
| 11 | **Power Down**<br>This bit controls the power down mode of the PHY.<br><br>0 = Normal operation<br>1 = General power down mode | R/W | 0b |
| 10 | **Isolate (PHY_ISO)**<br>This bit controls the isolation of the PHY from the MII interface.<br><br>0 = Non-Isolated (Normal operation)<br>1 = Isolated | R/W | 0b |

| Bits | Description | Type | Default |
|---|---|---|---|
| 9 | **Restart Auto-Negotiation (PHY_RST_AN)**<br>When set, this bit restarts the Auto-Negotiation process.<br>This bit is self clearing.<br><br>1 = Auto-Negotiation restarted | R/W1S/ SC | 0b |
| 8 | **Duplex Mode**<br>This bit is used to set the duplex.<br><br>0 = Half Duplex<br>1 = Full Duplex<br>**Note:** Ignored if the Auto-Negotiation Enable bit of this register is 1. | R/W | 1b |
| 7 | **Collision Test Mode (PHY_COL_TEST)**<br>This bit enables/disables the collision test mode of the PHY. When set, the collision signal is active during transmission. It is recommended that this feature be used only in loopback mode.<br><br>0 = Collision test mode disabled<br>1 = Collision test mode enabled | R/W | 0b |
| 6 | **Speed Select[1]**<br><br>See description for Speed Select[0] for details. | R/W | 1b |
| 5:0 | **RESERVED** | R/W | - |

### 5.2.2 BASIC STATUS REGISTER

Index (In Decimal): 1 Size: 16 bits

This register is used to monitor the status of the PHY.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **100BASE-T4**<br>This bit displays the status of 100BASE-T4 compatibility.<br><br>0 = PHY not able to perform 100BASE-T4<br>1 = PHY able to perform 100BASE-T4 | RO | 0b |
| 14 | **100BASE-X Full Duplex**<br>This bit displays the status of 100BASE-X full duplex compatibility.<br><br>0 = PHY not able to perform 100BASE-X full duplex<br>1 = PHY able to perform 100BASE-X full duplex | RO | 1b |
| 13 | **100BASE-X Half Duplex**<br>This bit displays the status of 100BASE-X half duplex compatibility.<br><br>0 = PHY not able to perform 100BASE-X half duplex<br>1 = PHY able to perform 100BASE-X half duplex | RO | 1b |


© 2018-2021 Microchip Technology Inc.

| Bits | Description | Type | Default |
|---|---|---|---|
| 12 | **10BASE-T Full Duplex**<br>This bit displays the status of 10BASE-T full duplex compatibility.<br><br>0 = PHY not able to perform 10BASE-T full duplex<br>1 = PHY able to perform 10BASE-T full duplex | RO | 1b |
| 11 | **10BASE-T Half Duplex**<br>This bit displays the status of 10BASE-T half duplex compatibility.<br><br>0 = PHY not able to perform 10BASE-T half duplex<br>1 = PHY able to perform 10BASE-T half duplex | RO | 1b |
| 10 | **100BASE-T2 Full Duplex**<br>This bit displays the status of 100BASE-T2 full duplex compatibility.<br><br>0 = PHY not able to perform 100BASE-T2 full duplex<br>1 = PHY able to perform 100BASE-T2 full duplex | RO | 0b |
| 9 | **100BASE-T2 Half Duplex**<br>This bit displays the status of 100BASE-T2 half duplex compatibility.<br><br>0 = PHY not able to perform 100BASE-T2 half duplex<br>1 = PHY able to perform 100BASE-T2 half duplex | RO | 0b |
| 8 | **Extended Status**<br>This bit displays whether extended status information is in register 15 (per IEEE 802.3 clause 22.2.4).<br><br>0 = No extended status information in Register 15<br>1 = Extended status information in Register 15 | RO | 1b |
| 7 | **Unidirectional Ability**<br>This bit indicates whether the PHY is able to transmit regardless of whether the PHY has determined that a valid link has been established.<br><br>0 = Can only transmit when a valid link has been established<br>1 = Can transmit regardless | RO | 0b |
| 6 | **MF Preamble Suppression**<br>This bit indicates whether the PHY accepts management frames with the preamble suppressed.<br><br>0 = Management frames with preamble suppressed not accepted<br>1 = Management frames with preamble suppressed accepted | RO | 1b |
| 5 | **Auto-Negotiation Complete**<br>This bit indicates the status of the Auto-Negotiation process.<br><br>0 = Auto-Negotiation process not completed<br>1 = Auto-Negotiation process completed | RO | 0b |
| 4 | **Remote Fault**<br>This bit indicates if a remote fault condition has been detected.<br><br>0 = No remote fault condition detected<br>1 = Remote fault condition detected | RO/LH | 0b |

| Bits | Description | Type | Default |
|---|---|---|---|
| 3 | **Auto-Negotiation Ability**<br>This bit indicates the PHY's Auto-Negotiation ability.<br><br>0 = PHY is unable to perform Auto-Negotiation<br>1 = PHY is able to perform Auto-Negotiation | RO | 1b |
| 2 | **Link Status**<br>This bit indicates the status of the link.<br><br>0 = Link is down<br>1 = Link is up | RO/LL | 0b |
| 1 | **Jabber Detect**<br>This bit indicates the status of the jabber condition.<br><br>0 = No jabber condition detected<br>1 = Jabber condition detected | RO/LH | 0b |
| 0 | **Extended Capability**<br>This bit indicates whether extended register capability is supported.<br><br>0 = Basic register set capabilities only<br>1 = Extended register set capabilities | RO | 1b |

### 5.2.3 DEVICE IDENTIFIER 1 REGISTER

Index (In Decimal): 2 Size: 16 bits

This register contains the MSB of the Organizationally Unique Identifier (OUI) for the PHY. The LSB of the PHY OUI is contained in the Device Identifier 2 Register.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **PHY ID Number**<br>Assigned to the 3rd through 18th bits of the Organizationally Unique Identifier (OUI), respectively. | RO | 0022h |


© 2018-2021 Microchip Technology Inc.

### 5.2.4 DEVICE IDENTIFIER 2 REGISTER

Index (In Decimal): 3 Size: 16 bits

This register contains the LSB of the Organizationally Unique Identifier (OUI) for the PHY. The MSB of the PHY OUI is contained in the Device Identifier 1 Register.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:10 | **PHY ID Number**<br>Assigned to the 19th through 24th bits of the Organizationally Unique Identifier (OUI), respectively. | RO | 000101b |
| 9:4 | **Model Number**<br>Six-bit manufacturer's model number. | RO | 100100b |
| 3:0 | **Revision Number**<br>Four-bit manufacturer's revision number. | RO | Note 5-1 |

**Note 5-1** The default value of the Revision Number field varies dependent on the silicon revision number.

**Note:** The hexadecimal equivalent of this register is 1640h (A0) or 1641h (B0).

### 5.2.5 AUTO-NEGOTIATION ADVERTISEMENT REGISTER

Index (In Decimal): 4 Size: 16 bits

This read/write register contains the advertised ability of the PHY and is used in the Auto-Negotiation process with the link partner.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Next Page**<br>0 = No next page ability<br>1 = Next page capable | R/W | 0b |
| 14 | **RESERVED** | RO | - |
| 13 | **Remote Fault**<br>This bit determines if remote fault indication will be advertised to the link partner.<br><br>0 = Remote fault indication not advertised<br>1 = Remote fault indication advertised | R/W | 0b |
| 12 | **Extended Next Page**<br>**Note:** This bit should be written as 0. | R/W | 0b |
| 11 | **Asymmetric Pause**<br>This bit determines the advertised asymmetric pause capability.<br><br>0 = No Asymmetric PAUSE toward link partner advertised<br>1 = Asymmetric PAUSE toward link partner advertised | R/W | 1b |
| 10 | **Symmetric Pause**<br>This bit determines the advertised symmetric pause capability.<br><br>0 = No Symmetric PAUSE toward link partner advertised<br>1 = Symmetric PAUSE toward link partner advertised | R/W | 1b |
| 9 | **100BASE-T4**<br>0 = no T4 ability<br>1 = T4 able<br>**Note:** The device does not support this mode and this bit should always be written as a 0. | R/W | 0 |
| 8 | **100BASE-X Full Duplex**<br>This bit determines the advertised 100BASE-X full duplex capability.<br><br>0 = 100BASE-X full duplex ability not advertised<br>1 = 100BASE-X full duplex ability advertised | R/W | Note 5-2 |
| 7 | **100BASE-X Half Duplex**<br>This bit determines the advertised 100BASE-X half duplex capability.<br><br>0 = 100BASE-X half duplex ability not advertised<br>1 = 100BASE-X half duplex ability advertised | R/W | Note 5-2 |


© 2018-2021 Microchip Technology Inc.

| Bits | Description | Type | Default |
|---|---|---|---|
| 6 | **10BASE-T Full Duplex**<br>This bit determines the advertised 10BASE-T full duplex capability.<br><br>0 = 10BASE-T full duplex ability not advertised<br>1 = 10BASE-T full duplex ability advertised | R/W | Note 5-2 |
| 5 | **10BASE-T Half Duplex**<br>This bit determines the advertised 10BASE-T half duplex capability.<br><br>0 = 10BASE-T half duplex ability not advertised<br>1 = 10BASE-T half duplex ability advertised | R/W | Note 5-2 |
| 4:0 | **Selector Field**<br>This field identifies the type of message being sent by Auto-Negotiation.<br><br>00001 = IEEE 802.3 | R/W | 00001b |

**Note 5-2** Set by the MODE[3:0] strapping pins. Refer to Section 3.3, "Configuration Straps" for details.

### 5.2.6 AUTO-NEGOTIATION LINK PARTNER BASE PAGE ABILITY REGISTER

Index (In Decimal): 5 Size: 16 bits

This read-only register contains the advertised ability of the link partner's PHY and is used in the Auto-Negotiation process between the link partner and the PHY.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Next Page**<br>This bit indicates the link partner PHY page capability.<br><br>0 = Link partner PHY does not advertise next page capability<br>1 = Link partner PHY advertises next page capability | RO | 0b |
| 14 | **Acknowledge**<br>This bit indicates whether the link code word has been received from the partner.<br><br>0 = Link code word not yet received from partner<br>1 = Link code word received from partner | RO | 0b |
| 13 | **Remote Fault**<br>This bit indicates whether a remote fault has been detected.<br><br>0 = No remote fault<br>1 = Remote fault detected | RO | 0b |
| 12 | **Extended Next Page**<br><br>0 = Link partner PHY does not advertise extended next page capability<br>1 = Link partner PHY advertises extended next page capability | RO | 0b |

| Bits | Description | Type | Default |
|---|---|---|---|
| 11 | **Asymmetric Pause**<br>This bit indicates the link partner PHY asymmetric pause capability.<br><br>0 = No Asymmetric PAUSE toward link partner<br>1 = Asymmetric PAUSE toward link partner | RO | 0b |
| 10 | **Pause**<br>This bit indicates the link partner PHY symmetric pause capability.<br><br>0 = No Symmetric PAUSE toward link partner<br>1 = Symmetric PAUSE toward link partner | RO | 0b |
| 9 | **100BASE-T4**<br>This bit indicates the link partner PHY 100BASE-T4 capability.<br><br>0 = 100BASE-T4 ability not supported<br>1 = 100BASE-T4 ability supported | RO | 0b |
| 8 | **100BASE-X Full Duplex**<br>This bit indicates the link partner PHY 100BASE-X full duplex capability.<br><br>0 = 100BASE-X full duplex ability not supported<br>1 = 100BASE-X full duplex ability supported | RO | 0b |
| 7 | **100BASE-X Half Duplex**<br>This bit indicates the link partner PHY 100BASE-X half duplex capability.<br><br>0 = 100BASE-X half duplex ability not supported<br>1 = 100BASE-X half duplex ability supported | RO | 0b |
| 6 | **10BASE-T Full Duplex**<br>This bit indicates the link partner PHY 10BASE-T full duplex capability.<br><br>0 = 10BASE-T full duplex ability not supported<br>1 = 10BASE-T full duplex ability supported | RO | 0b |
| 5 | **10BASE-T Half Duplex**<br>This bit indicates the link partner PHY 10BASE-T half duplex capability.<br><br>0 = 10BASE-T half duplex ability not supported<br>1 = 10BASE-T half duplex ability supported | RO | 0b |
| 4:0 | **Selector Field**<br>This field identifies the type of message being sent by Auto-Negotiation.<br><br>00001 = IEEE 802.3 | RO | 00000b |


© 2018-2021 Microchip Technology Inc.

### 5.2.7 AUTO-NEGOTIATION EXPANSION REGISTER

Index (In Decimal): 6 Size: 16 bits

This read/write register is used in the Auto-Negotiation process between the link partner and the PHY.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:7 | **RESERVED** | RO | - |
| 6 | **Receive Next Page Location Able**<br>0 = Received next page storage location is not specified by bit 6.5<br>1 = Received next page storage location is specified by bit 6.5 | RO | 1b |
| 5 | **Received Next Page Storage Location**<br>0 = Link partner next pages are stored in the Auto-Negotiation Link Partner Base Page Ability Register (PHY register 5)<br>1 = Link partner next pages are stored in the Auto-Negotiation Next Page RX Register (PHY register 8) | RO | 1b |
| 4 | **Parallel Detection Fault**<br>This bit indicates whether a Parallel Detection Fault has been detected.<br><br>0 = A fault hasn't been detected via the Parallel Detection function<br>1 = A fault has been detected via the Parallel Detection function | RO/LH | 0b |
| 3 | **Link Partner Next Page Able**<br>This bit indicates whether the link partner has next page ability.<br><br>0 = Link partner does not contain next page capability<br>1 = Link partner contains next page capability | RO | 0b |
| 2 | **Next Page Able**<br>This bit indicates whether the local device has next page ability.<br><br>0 = Local device does not contain next page capability<br>1 = Local device contains next page capability | RO | 1b |
| 1 | **Page Received**<br>This bit indicates the reception of a new page.<br><br>0 = A new page has not been received<br>1 = A new page has been received | RO/LH | 0b |
| 0 | **Link Partner Auto-Negotiation Able**<br>This bit indicates the Auto-Negotiation ability of the link partner.<br><br>0 = Link partner is not Auto-Negotiation able<br>1 = Link partner is Auto-Negotiation able | RO | 0b |

### 5.2.8 AUTO-NEGOTIATION NEXT PAGE TX REGISTER

Index (In Decimal): 7 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Next Page**<br>0 = No next page ability<br>1 = Next page capable | R/W | 0b |
| 14 | **RESERVED** | RO | - |
| 13 | **Message Page**<br>0 = Unformatted page<br>1 = Message page | R/W | 1b |
| 12 | **Acknowledge 2**<br>0 = Device cannot comply with message.<br>1 = Device will comply with message. | R/W | 0b |
| 11 | **Toggle**<br>0 = Previous value was HIGH.<br>1 = Previous value was LOW. | RO | 0b |
| 10:0 | **Message Code**<br>Message/Unformatted Code Field | R/W | 000 0000 0001b |


© 2018-2021 Microchip Technology Inc.

### 5.2.9 AUTO-NEGOTIATION NEXT PAGE RX REGISTER

Index (In Decimal): 8 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Next Page**<br>0 = No next page ability<br>1 = Next page capable | RO | 0b |
| 14 | **Acknowledge**<br>This bit indicates whether the link code word has been received from the partner.<br><br>0 = Link code word not yet received from partner<br>1 = Link code word received from partner | RO | 0 |
| 13 | **Message Page**<br>0 = Unformatted page<br>1 = Message page | RO | 0b |
| 12 | **Acknowledge 2**<br>0 = Device cannot comply with message.<br>1 = Device will comply with message. | RO | 0b |
| 11 | **Toggle**<br>0 = Previous value was HIGH.<br>1 = Previous value was LOW. | RO | 0b |
| 10:0 | **Message Code**<br>Message/Unformatted Code Field | RO | 000<br>0000<br>0000b |

### 5.2.10 AUTO-NEGOTIATION MASTER SLAVE CONTROL REGISTER

Index (In Decimal): 9 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:13 | **Test Mode**<br>IEEE 802.3 clause 40.6.1.1.2 transmitter test mode.<br>000 = Normal mode<br>001 = Test Mode 1 - Transmit waveform test<br>010 = Test Mode 2 - Transmit jitter test in Master mode<br>011 = Test Mode 3 - Transmit jitter test in Slave mode<br>100 = Test Mode 4 - Transmitter distortion test<br>101 = Reserved<br>110 = Reserved<br>111 = Reserved | R/W | 000b |
| 12 | **Master/Slave Manual Configuration Enable**<br>0 = disable MASTER-SLAVE manual configuration value<br>1 = enable MASTER-SLAVE manual configuration value | R/W | 0b |
| 11 | **Master/Slave Manual Configuration Value**<br>Active only when the Master/Slave Manual Configuration Enable bit of this register is 1.<br>0 = Configure PHY as slave<br>1 = Configure PHY as master | R/W | 0b |
| 10 | **Port Type**<br>0 = single-port device<br>1 = multi-port device | R/W | 0b |
| 9 | **1000BASE-T Full Duplex**<br>0 = advertise PHY is not 1000BASE-T full duplex capable<br>1 = advertise PHY is 1000BASE-T full duplex capable | R/W | 1b |
| 8 | **1000BASE-T Half Duplex**<br>0 = advertise PHY is not 1000BASE-T half duplex capable<br>1 = advertise PHY is 1000BASE-T half duplex capable<br>**Note:** The device does not support this mode and this bit should always be written as a 0. | R/W | 0b |
| 7:0 | **RESERVED** | RO | - |


© 2018-2021 Microchip Technology Inc.

### 5.2.11 AUTO-NEGOTIATION MASTER SLAVE STATUS REGISTER

Index (In Decimal): 10 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Master/Slave Configuration Fault**<br>0 = No MASTER-SLAVE configuration fault detected<br>1 = MASTER-SLAVE configuration fault detected | RO/LH | 0b |
| 14 | **Master/Slave Configuration Resolution**<br>0 = Local PHY configuration resolved to SLAVE<br>1 = Local PHY configuration resolved to MASTER | RO | 0b |
| 13 | **Local 1000BASE-T Receiver Status**<br>0 = Local Receiver not OK<br>1 = Local Receiver OK | RO | 0b |
| 12 | **Remote (Link Partner) Receiver Status**<br>0 = Remote Receiver not OK<br>1 = Remote Receiver OK | RO | 0b |
| 11 | **Link Partner Advertised 1000BASE-T Full Duplex Capability**<br>0 = Link Partner is not capable of 1000BASE-T full duplex<br>1 = Link Partner is capable of 1000BASE-T full duplex | RO | 0b |
| 10 | **Link Partner Advertised 1000BASE-T Half Duplex Capability**<br>0 = Link Partner is not capable of 1000BASE-T half duplex<br>1 = Link Partner is capable of 1000BASE-T half duplex | RO | 0b |
| 9:8 | **RESERVED** | RO | - |
| 7:0 | **1000BASE-T Idle Error Count**<br>Cumulative count of the errors detected when the receiver is receiving idles.<br>**Note:** This counter halts at a value of 0xFF. | RO/RC | 00h |

### 5.2.12 MMD ACCESS CONTROL REGISTER

Index (In Decimal): 13 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **MMD Function**<br>This field is used to select the desired MMD function:<br>00 = Address<br>01 = Data, no post increment<br>10 = Data, post increment on reads and writes<br>11 = Data, post increment on writes only | R/W | 00b |
| 13:5 | **RESERVED** | RO | - |
| 4:0 | **MMD Device Address (DEVAD)**<br>This field is used to select the desired MMD device address. | R/W | 00000b |

### 5.2.13 MMD ACCESS ADDRESS/DATA REGISTER

Index (In Decimal): 14 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **MMD Register Address/Data**<br>If the MMD Function field of the MMD Access Control Register is “00”, this field is used to indicate the MMD register address to read/write of the device specified in the MMD Device Address (DEVAD) field. Otherwise, this register is used to read/write data from/to the previously specified MMD address. | R/W | 0000h |


© 2018-2021 Microchip Technology Inc.

### 5.2.14 EXTENDED STATUS REGISTER

Index (In Decimal): 15 Size: 16 bits

This register is used to monitor the status of the PHY.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **1000BASE-X Full Duplex**<br>This bit displays the status of 1000BASE-X full duplex compatibility.<br><br>0 = PHY not able to perform 1000BASE-X full duplex<br>1 = PHY able to perform 1000BASE-X full duplex | RO | 0b |
| 14 | **1000BASE-X Half Duplex**<br>This bit displays the status of 1000BASE-X half duplex compatibility.<br><br>0 = PHY not able to perform 1000BASE-X half duplex<br>1 = PHY able to perform 1000BASE-X half duplex | RO | 0b |
| 13 | **1000BASE-T Full Duplex**<br>This bit displays the status of 1000BASE-T full duplex compatibility.<br><br>0 = PHY not able to perform 1000BASE-T full duplex<br>1 = PHY able to perform 1000BASE-T full duplex | RO | 1b |
| 12 | **1000BASE-T Half Duplex**<br>This bit displays the status of 1000BASE-T half duplex compatibility.<br><br>0 = PHY not able to perform 1000BASE-T half duplex<br>1 = PHY able to perform 1000BASE-T half duplex | RO | 0b |
| 11:0 | **RESERVED** | RO | - |

### 5.2.15 REMOTE LOOPBACK REGISTER

Index (In Decimal): 17 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:9 | **RESERVED** | RO | - |
| 8 | **Remote Loopback**<br>1 = Enable remote loopback<br>0 = Disable remote loopback | R/W | 0b |
| 7:0 | **RESERVED** | RO | - |

### 5.2.16 LINKMD CABLE DIAGNOSTIC REGISTER

Index (In Decimal): 18 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Cable Diagnostics Test Enable (VCT_EN)**<br>Writing a 1 enables the test.<br>This bit is self-cleared when the test is complete.<br>Writing a 0 will disable the test.<br><br>Reading a 0 indicates the cable diagnostic test is completed and the status information is valid.<br>Reading a 1 indicates the cable diagnostic test is in progress and the status information is NOT valid. | R/W/SC | 0b |
| 14 | **Cable Diagnostic Disable Transmitter (VCT_DIS_TX)**<br>[0] = The transmitter is enabled to start cable diagnostic.<br>[1] = The transmitter is disabled and cable diagnostic is on hold to break down the link. | R/W | 0b |
| 13:12 | **Cable Diagnostics Test Pair (VCT_PAIR[1:0])**<br>This field defines which channel to be tested.<br>00 = Pair A<br>01 = Pair B<br>10 = Pair C<br>11 = Pair D | R/W | 00b |
| 11:10 | **RESERVED** | R/W | 00b |
| 9:8 | **Cable Diagnostics Status (VCT_ST[1:0])**<br>Valid only when VCT_EN = 0.<br>00 = Normal, no fault has been detected<br>01 = Open Fault has been detected<br>10 = Short Fault has been detected<br>11 = Cable diagnostic test failed | RO | 00b |
| 7:0 | **Cable Diagnostics Data or Threshold (VCT_DATA[7:0])**<br>This is the data of cable diagnostics. Valid only when VCT_EN = 0.<br><br>(1) If cable is normal, i.e., VCT_ST = 00, VCT_DATA don't care.<br>(2) If cable is open or short, i.e., VCT_ST = 01 or 10, the distance to fault is approximately 0.8 * (VCT_DATA - 22) (Meters) (see Section 4.15)<br>(3) If cable diagnostics failed, i.e., VCT_ST = 11,<br>Bit[7] = 1 means invalid reflected pulse width, i.e. equal or greater than 152ns, equal or less than 48ns.<br>Bit[6] = 1 means cable has signal for too long time during WAIT state. It's unusual and for debug only.<br>Bit[5] = 1 means mask100 detected and no silent time window can be found for diagnostics. It means high frequency signal is found on the line. The link partner probably is in forced 100BT or 1000BT mode.<br>Bit[4] = 1 means signals faster than NLP and FLP exists and no silent time window can be found for diagnostics. It's unusual and for debug only.<br>Bit[3:2] = number of low pulses detected. If more than 3, stay at 3.<br>Bit[1:0] = number of high pulses detected. If more than 3, stay at 3. | RO | 00h |


© 2018-2021 Microchip Technology Inc.

### 5.2.17 DIGITAL PMA/PCS STATUS REGISTER

Index (In Decimal): 19 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:2 | **RESERVED** | RO | - |
| 1 | **1000BT link status**<br>1000 BT link status<br>1 = link status OK<br>0 = link status not OK | RO | 0b |
| 0 | **100BT link status**<br>100 BT link status<br>1 = link status OK<br>0 = link status not OK | RO | 0b |

### 5.2.18 RXER COUNTER REGISTER

Index (In Decimal): 21 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **RXER Counter**<br>RX Error counter for the RX_ER signal<br>**Note:** This counter halts at a value of 0xFFFF. | RC | 0000h |

### 5.2.19 LED MODE SELECT REGISTER

Index (In Decimal): 22 Size: 16 bits

This register selects the operating mode of the PHY LEDs when in extended mode. This register is only used when the KSZ9031 LED Mode bit in the KSZ9031 LED Mode Register is clear.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | - |
| 7:4 | **LED2 Configuration**<br>This field configures the LED2 pin function. Refer to Table 4-8 for definitions. | R/W | 0010b |
| 3:0 | **LED1 Configuration**<br>This field configures the LED1 pin function. Refer to Table 4-8 for definitions. | R/W | 0001b |

© 2018-2021 Microchip Technology Inc.

### 5.2.20 LED BEHAVIOR REGISTER

Index (In Decimal): 23 Size: 16 bits

This register selects the operating parameters of the PHY LEDs when in extended mode. This register is only used when the KSZ9031 LED Mode bit in the KSZ9031 LED Mode Register is clear.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **RESERVED** | R/W | - |
| 14 | **LED Activity Output Select** | R/W | 0b |
| 13 | **RESERVED** | R/W | - |
| 12 | **LED Pulsing Enable** | R/W | 1b |
| 11:10 | **LED Blink / Pulse-Stretch Rate**<br>00 = 2.5 Hz Blink Rate / 400 ms pulse-stretch<br>01 = 5 Hz Blink Rate / 200 ms pulse-stretch<br>10 = 10 Hz Blink Rate / 100 ms pulse-stretch<br>11 = 20 Hz Blink Rate / 50 ms pulse-stretch | R/W | 00b |
| 9:7 | **RESERVED** | R/W | - |
| 6:5 | **LED Pulse Stretch Enables**<br>Configures LED2 (bit 6) and LED1 (bit 5) to either pulse-stretch when 1, or blink when 0. | R/W | 00b |
| 4:2 | **RESERVED** | R/W | - |
| 1:0 | **LED Combination Disables**<br>Configures LED2 (bit 1) and LED1 (bit 0) to either combine link/activity and duplex/collision when 0, or disable combination, providing link-only and duplex-only when 1. | R/W | 00b |


© 2018-2021 Microchip Technology Inc.

### 5.2.21 MDIO DRIVE REGISTER

Index (In Decimal): 25 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:2 | **RESERVED** | R/W | - |
| 1 | **MDIO Drive**<br>When set to a 0, the MDIO output is open-drain<br>When set to a 1, the MDIO output is push-pull | R/W | 0b |
| 0 | **RESERVED** | R/W | - |

### 5.2.22 KSZ9031 LED MODE REGISTER

Index (In Decimal): 26 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **RESERVED** | R/W | - |
| 14 | **KSZ9031 LED Mode**<br>1 = KSZ9031 LED mode<br>0 = Extended LED mode<br>**Note:** For normal LED operation, this bit should always be written as a 1. | R/W | 1b |
| 13:0 | **RESERVED** | R/W | - |

### 5.2.23 INTERRUPT CONTROL/STATUS REGISTER

Index (In Decimal): 27 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Jabber Interrupt Enable**<br>1 = Enable jabber interrupt<br>0 = Disable jabber interrupt | R/W | 0b |
| 14 | **Receive Error Interrupt Enable**<br>1 = Enable receive error interrupt<br>0 = Disable receive error interrupt | R/W | 0b |
| 13 | **Page Received Interrupt Enable**<br>1 = Enable page received interrupt<br>0 = Disable page received interrupt | R/W | 0b |
| 12 | **Parallel Detect Fault Interrupt Enable**<br>1 = Enable parallel detection fault interrupt<br>0 = Disable parallel detection fault interrupt | R/W | 0b |
| 11 | **Link Partner Acknowledge Interrupt Enable**<br>1 = Enable link partner acknowledge interrupt<br>0 = Disable link partner acknowledge interrupt | R/W | 0b |
| 10 | **Link Down Interrupt Enable**<br>1 = Enable link down interrupt<br>0 = Disable link down interrupt | R/W | 0b |
| 9 | **Remote Fault Interrupt Enable**<br>1 = Enable remote fault interrupt<br>0 = Disable remote fault interrupt | R/W | 0b |
| 8 | **Link Up Interrupt Enable**<br>1 = Enable link up interrupt<br>0 = Disable link up interrupt | R/W | 0b |
| 7 | **Jabber Interrupt**<br>1 = Jabber interrupt<br>0 = No jabber interrupt | RC | 0b |
| 6 | **Receive Error Interrupt**<br>1 = Receive error interrupt<br>0 = No receive error interrupt | RC | 0b |
| 5 | **Page Receive Interrupt**<br>1 = Page receive interrupt<br>0 = No page receive interrupt | RC | 0b |
| 4 | **Parallel Detect Fault Interrupt**<br>1 = Parallel detection fault interrupt<br>0 = No parallel detection fault interrupt | RC | 0b |
| 3 | **Link Partner Acknowledge Interrupt**<br>1 = Link partner acknowledge interrupt<br>0 = No link partner acknowledge interrupt | RC | 0b |
| 2 | **Link Down Interrupt**<br>1 = Link down interrupt<br>0 = No link down interrupt | RC | 0b |


© 2018-2021 Microchip Technology Inc.

| Bits | Description | Type | Default |
|---|---|---|---|
| 1 | **Remote Fault Interrupt**<br>1 = Remote fault interrupt<br>0 = No remote fault interrupt | RC | 0b |
| 0 | **Link Up Interrupt**<br>1 = Link up interrupt<br>0 = No link up interrupt | RC | 0b |

### 5.2.24 AUTO-MDI/MDI-X REGISTER

Index (In Decimal): 28 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | RO | - |
| 7 | **MDI Set**<br>When the Swap-Off bit of this register is asserted (1),<br>1 = PHY is set to operate in MDI mode<br>0 = PHY is set to operate in MDI-X mode | R/W | 0b |
| 6 | **Swap-Off**<br>1 = Disable Auto-MDI/MDI-X function<br>0 = Enable Auto-MDI/MDI-X function | R/W | 0b |
| 5:0 | **RESERVED** | RO | - |

### 5.2.25 SOFTWARE POWER DOWN CONTROL REGISTER

Index (In Decimal): 29 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:12 | **RESERVED** | R/W | - |
| 11 | **spd_clock_gate_override**<br>0 = internal clocks are gated during the Software Power Down (SPD) mode.<br>1 = internal clock gating is overridden during the SPD mode. | R/W | 0b |
| 10 | **spd_pll_disable**<br>0 = PLL is enabled during the Software Power Down (SPD) mode.<br>1 = PLL is disabled during the SPD mode. | R/W | 0b |
| 9:8 | **RESERVED** | R/W | - |
| 7 | **IO_DC_test_en**<br>1 = enable IO test | R/W | 0b |
| 6 | **VOH**<br>1 = “VDD” to output IO<br>0 = “GND” to IO | R/W | 0b |

### 5.2.26 EXTERNAL LOOPBACK REGISTER

Index (In Decimal): 30 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:4 | **RESERVED** | R/W | - |
| 3 | **Ext_lpbk**<br>External loopback enable | R/W | 0b |
| 2:0 | **RESERVED** | R/W | - |


© 2018-2021 Microchip Technology Inc.

### 5.2.27 CONTROL REGISTER

Index (In Decimal): 31 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **RESERVED** | RO | - |
| 14 | **Interrupt Polarity Invert**<br>1 = invert<br>0 = normal | R/W | 0b |
| 13:10 | **RESERVED** | RO | - |
| 9 | **Enable Jabber**<br>1 = Enable jabber counter<br>0 = Disable | R/W | 1b |
| 8 | **Enable SQE Test**<br>1 = Enable SQE test<br>0 = Disable | R/W | 1b |
| 7 | **RESERVED** | RO | - |
| 6 | **Speed status 1000T**<br>Indicates speed is 1000T | RO | 0b |
| 5 | **Speed status 100TX**<br>Indicates speed is 100TX | RO | 0b |
| 4 | **Speed status 10BT**<br>Indicates speed is 10BT | RO | 0b |
| 3 | **Duplex status**<br>Indicates duplex status | RO | 0b |
| 2 | **1000BASE-T Mater/Slave status**<br>1 = Indicates 1000BASE-T Master mode<br>0 = Indicates 1000BASE-T Slave mode | RO | 0b |
| 1 | **Software Reset**<br>1 = Reset PHY except all registers<br>0 = Disable reset | W1S/RC | 0b |
| 0 | **Link Status Check Fail**<br>1 = Fail<br>0 = Not Failing | RC | 0b |

## 5.3 MDIO Manageable Device (MMD) Registers

MMD registers provide indirect read/write access to up to 32 MMD device addresses with each device supporting up to 65,536 16-bit registers, as defined in Clause 22 of the IEEE 802.3 Specification. This device, however, uses only a small fraction of the available registers. See Table 5-2 for a list of supported MMD device addresses and their associated register addresses. These registers are accessed through the SMI (MDIO/MDC) interface.

The following two standard registers serve as the portal registers to access the indirect MMD registers.

- MMD Access Control Register
- MMD Access Address/Data Register

**Example: MMD Register Write**

Write MMD - Device Address 2h, Register 10h = 0001h to enable link-up detection to trigger PME for WOL.

1. Write the MMD Access Control Register with 0002h // Select address register for MMD – Device Address 2h.
2. Write the MMD Access Address/Data Register with 0010h // Set address register = 10h.
3. Write the MMD Access Control Register with 4002h // Select data register for MMD – Device Address 2h.
4. Write the MMD Access Address/Data Register with 0001h // Write value 0001h to MMD – Device Address 2h, Register 10h.

**Example: MMD Register Read**

Read MMD - Device Address 3h, Register 14h EEE Control and Capability.

1. Write the MMD Access Control Register with 0003h // Select address register for MMD – Device Address 3h.
2. Write the MMD Access Address/Data Register with 0014h // Set address register = 14h.
3. Write the MMD Access Control Register with 4003h // Select data register for MMD – Device Address 3h.
4. Read the MMD Access Address/Data Register // Read data in MMD – Device Address 3h, Register 14h.

It is also possible to automatically increment the register address for reads and/or writes

**Example: MMD Register Writes with Post Increment**

Write MMD - Device Address 2h, Register 11h – 13h = 0123_4567_89ABh for the magic packet's MAC address.

1. Write the MMD Access Control Register with 0002h // Select address register for MMD – Device Address 2h.
2. Write the MMD Access Address/Data Register with 0011h // Set address register = 11h.
3. Write the MMD Access Control Register with 8002h or C002h // Select data register with post increment for MMD – Device Address 2h.
4. Write the MMD Access Address/Data Register with 0123h // Write value 0123h to MMD – Device Address 2h, Register 11h.
5. Write the MMD Access Address/Data Register with 4567h // Write value 4567h to MMD – Device Address 2h, Register 12h.
6. Write the MMD Access Address/Data Register with 89ABh // Write value 89ABh to MMD – Device Address 2h, Register 13h.

**Example: MMD Register Reads with Post Increment**

Read MMD - Device Address 2h, Register 11h – 13h for the magic packet's MAC address.

1. Write the MMD Access Control Register with 0002h // Select address register for MMD – Device Address 2h.
2. Write the MMD Access Address/Data Register with 0011h // Set address register = 11h.
3. Write the MMD Access Control Register with 8002h // Select data register with post increment for MMD – Device Address 2h.
4. Read the MMD Access Address/Data Register // Read data in MMD – Device Address 2h, Register 11h.
5. Read the MMD Access Address/Data Register // Read data in MMD – Device Address 2h, Register 12h.
6. Read the MMD Access Address/Data Register // Read data in MMD – Device Address 2h, Register 13h.


© 2018-2021 Microchip Technology Inc.

### 5.3.1 MEAN SLICER ERROR REGISTER

Index (In Decimal): 1.225 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Mean Slicer Error**<br>This field provides the current mean error value. Either absolute or square mode values can be provided.<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 0000h |

### 5.3.2 DCQ MEAN SQUARE ERROR REGISTER

Index (In Decimal): 1.226 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:10 | **RESERVED** | RO | - |
| 9 | **MSE Value Valid**<br>This field provides the mean square error valid indication.<br>1 = invalid<br>0 = valid<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 0b |
| 8:0 | **MSE Value**<br>This field provides the current mean square error value.<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 000h |

### 5.3.3 DCQ MEAN SQUARE ERROR WORST CASE REGISTER

Index (In Decimal): 1.227 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:10 | **RESERVED** | RO | - |
| 9 | **MSE Worst Case Value Valid**<br>This field provides the worst case mean square error valid indication.<br>1 = invalid<br>0 = valid<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 0b |
| 8:0 | **MSE Worst Case Value**<br>This field provides the worst case mean square error value since the last time the channel was captured for reading.<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 000h |

### 5.3.4 DCQ SQI REGISTER

Index (In Decimal): 1.228 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | RO | - |
| 7:5 | **SQI Worst Case**<br>This field indicates the worst case SQI value since the last time the channel was captured for reading.<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 000b |
| 4 | **RESERVED** | RO | - |


© 2018-2021 Microchip Technology Inc.

| Bits | Description | Type | Default |
|---|---|---|---|
| 3:1 | **SQI**<br>This field indicates the current SQI value.<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 000b |
| 0 | **RESERVED** | RO | - |

### 5.3.5 DCQ PEAK MSE REGISTER

Index (In Decimal): 1.229 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **Peak MSE Worst Case**<br>This field indicates the worst case peak MSE value since the last time the channel was captured for reading.<br>0-63 = Peak MSE<br>64-254 = Invalid<br>255 = measurement not ready<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 00h |
| 7:0 | **Peak MSE Value**<br>This field provides the current peak MSE value.<br>0-63 = Peak MSE<br>64-254 = Invalid<br>255 = measurement not ready<br>**Note:** This field is updated when the DCQ Read Capture bit in the DCQ Control Register is written as a 1.<br>**Note:** The DCQ Channel Number field specifies which channel is captured. | RO | 00h |

### 5.3.6 DCQ CONTROL REGISTER

Index (In Decimal): 1.230 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **DCQ Read Capture**<br>When this bit is set the DCQ values are captured. | R/W/SC | 0b |
| 14:2 | **RESERVED** | R/W | - |
| 1:0 | **DCQ Channel Number**<br>This field specifies which channel's (wire pair) values are captured into the DCQ registers.<br>00 = Channel A<br>01 = Channel B<br>10 = Channel C<br>11 = Channel D<br>**Note:** Channel A is used for both 100BASE-TX and 1000BASE-T. Channels B-D are only used for 1000BASE-T. | R/W | 00b |

### 5.3.7 DCQ CONFIGURATION REGISTER

Index (In Decimal): 1.231 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **scale613**<br>Scaling factor for SQI method 5 (TC1 peak MSE). | R/W | 00b |
| 13:10 | **sqi_kp3**<br>LPF bandwidth control.for SQI method 5 (TC1 peak MSE). | R/W | 101b |
| 9:8 | **scale611**<br>Scaling factor for SQI methods 3 (TC1 MSE) and 4 (TC1 SQI). | R/W | 00b |
| 7 | **sqi_reset**<br>When set the SQI logic is reset.<br>**Note:** This bit does not self-clear. | R/W | 0b |
| 6 | **sqi_squ_mode_en**<br>0 = Absolute mode<br>1 = Square mode | R/W | 1b |
| 5 | **sqi_enable**<br>When set SQI measurements are enabled. | R/W | 1b |
| 4:0 | **sqi_kp**<br>LPF bandwidth control.for SQI methods 2 (non TC1 LPF mean), 3 (TC1 MSE) and 4 (TC1 SQI). | R/W | 0Dh |


© 2018-2021 Microchip Technology Inc.

### 5.3.8 DCQ SQI TABLE REGISTERS

Index (In Decimal): 1.232-238 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:9 | **RESERVED** | RO | - |
| 8:0 | **SQI_VALUE**<br>Lookup table utilized for implement of SQI method 4 (TC1 SQI). These registers set the thresholds to map the error value to a SQI level. | R/W | Table 5-3 |

**TABLE 5-3: SQI VALUE DEFAULTS**

| Register | Default (Hexadecimal) |
|---|---|
| SQI_TBL1.SQI_VALUE | A3h |
| SQI_TBL2.SQI_VALUE | 82h |
| SQI_TBL3.SQI_VALUE | 67h |
| SQI_TBL4.SQI_VALUE | 52h |
| SQI_TBL5.SQI_VALUE | 41h |
| SQI_TBL6.SQI_VALUE | 34h |
| SQI_TBL7.SQI_VALUE | 29h |

### 5.3.9 COMMON CONTROL REGISTER

Index (In Decimal): 2.0 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:5 | **RESERVED** | RO | - |
| 4 | **Single LED**<br>1 = Individual-LED mode<br>0 = Tri-color-LED mode<br><br>By default, this bit reflects the value of the LED_MODE strapping pin.<br>If written as a 1, the value of the LED_MODE strapping pin is overridden and Single-LED mode is selected. | R/W | Note 5-3 |
| 3:2 | **RESERVED** | R/W | - |
| 1 | **clk125 Enable**<br>A 1 enables the 125 MHz clock output onto the CLK125_NDO pin. | R/W | Note 5-4 |
| 0 | **All-PHYAD Enable**<br>When this bit is set, the PHY will respond to PHY address 0 as well as it's assigned PHY address. | R/W | Note 5-5 |

**Note 5-3** Set by the LED_MODE strapping pin. See Section 3.3, "Configuration Straps" for details.

**Note 5-4** Set by the CLK125_EN strapping pin. See Section 3.3, "Configuration Straps" for details.

**Note 5-5** Set by the inverse of the ALLPHYAD strapping pin. See Section 3.3, "Configuration Straps" for details.

### 5.3.10 STRAP STATUS REGISTER

Index (In Decimal): 2.1 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | RO | - |
| 7 | **LED_MODE Strap-In Status**<br>1 = Individual LED mode<br>0 = Tri-color LED mode | RO | Note 5-6 |
| 6 | **RESERVED** | RO | - |
| 5 | **CLK125_EN Strap-In Status**<br>1 = CLK125_EN strap-in is enabled<br>0 = CLK125_EN strap-in is disabled | RO | Note 5-7 |
| 4:0 | **PHYAD[2:0] Strap-In Status**<br>Strap-in value for PHY address<br>**Note:** Bits [4:3] of PHY address are always set to '00'. | RO | Note 5-8 |

**Note 5-6** Set by the LED_MODE strapping pin. See Section 3.3, "Configuration Straps" for details.

**Note 5-7** Set by the CLK125_EN strapping pin. See Section 3.3, "Configuration Straps" for details

**Note 5-8** Set by the PHYAD[2:0] strapping pins. See Section 3.3, "Configuration Straps" for details.


© 2018-2021 Microchip Technology Inc.

### 5.3.11 OPERATION MODE STRAP OVERRIDE REGISTER

Index (In Decimal): 2.2 Size: 16 bits

This register may be used to override the value of the MODE[3:0] configuration straps.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **RESERVED** | RO | - |
| 13:12 | **RESERVED** | RO | - |
| 11 | **gmii_pme_on_int_mode**<br>1 = GMII mode with PME_N2 mapped onto INT_N | R/W | Note 5-9 |
| 10 | **RESERVED** | RO | - |
| 9 | **gmii_pme_on_led1_mode**<br>1 = GMII mode with PME_N1 mapped onto LED1 | R/W | Note 5-9 |
| 8 | **RESERVED** | RO | - |
| 7 | **iddq_mode**<br>Chip IDDQ Power-Down<br>1 = Chip power-down mode | RO | Note 5-9 |
| 6:5 | **RESERVED** | RO | - |
| 4 | **ntree_mode**<br>NAND Tree mode<br>1 = NAND Tree mode | R/W | Note 5-9 |
| 3:2 | **RESERVED** | RO | - |
| 1 | **gmii_mode**<br>GMII/MII mode<br>1 = GMII/MII mode | R/W | Note 5-9 |
| 0 | **RESERVED** | RO | - |

**Note 5-9** Set by the MODE[3:0] strapping pins. See Section 3.3, "Configuration Straps" for details.

### 5.3.12 OPERATION MODE STRAP REGISTER

Index (In Decimal): 2.3 Size: 16 bits

This register indicates the value of the MODE[3:0] configuration straps that were latched into the device at reset.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **RESERVED** | RO | - |
| 13:12 | **RESERVED** | RO | - |
| 11 | **Strap_gmii_pme_on_int_mode**<br>1 = GMII mode with PME_N2 mapped onto INT_N | RO | Note 5-10 |
| 10 | **RESERVED** | RO | - |
| 9 | **Strap_gmii_pme_on_led1_mode**<br>1 = GMII mode with PME_N1 mapped onto LED1 | RO | Note 5-10 |
| 8 | **RESERVED** | RO | - |
| 7 | **Strap_iddq_mode**<br>Chip IDDQ Power-Down Strap-In Status<br>1 = Chip power-down mode | RO | Note 5-10 |
| 6:5 | **RESERVED** | RO | - |
| 4 | **Strap_ntree_mode**<br>NAND Tree Strap-In Status<br>1 = NAND Tree mode | RO | Note 5-10 |
| 3:2 | **RESERVED** | RO | - |
| 1 | **Strap_gmii_mode**<br>GMII/MII mode Strap-In status<br>1 = Strapped to GMII/MII mode | RO | Note 5-10 |
| 0 | **RESERVED** | RO | - |

**Note 5-10** Set by the MODE[3:0] strapping pins. See Section 3.3, "Configuration Straps" for details.


© 2018-2021 Microchip Technology Inc.

### 5.3.13 CLOCK INVERT AND CONTROL SIGNAL PAD SKEW REGISTER

Index (In Decimal): 2.4 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | 0h |
| 7:4 | **RX_DV Skew**<br>RX_DV output skew Control (~28 min to ~73 max ps/step) | R/W | 7h |
| 3:0 | **TX_EN Skew**<br>TX_EN input skew Control (~28 min to ~73 max ps/step) | R/W | 7h |

### 5.3.14 CLOCK PAD SKEW REGISTER

Index (In Decimal): 2.8 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:10 | **RESERVED** | RO | - |
| 9:5 | **GTX_CLK Pad Input Skew**<br>GTX_CLK input Skew Control (~24 min to ~58 max ps/step) | R/W | 07h |
| 4:0 | **RX_CLK_pad_oskew**<br>RX_CLK output Skew Control (~24 min to ~58 max ps/step) | R/W | 07h |

### 5.3.15 SELF-TEST PACKET COUNT LO REGISTER

Index (In Decimal): 2.9 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_frame_cnt[15:0]** | R/W | 0000h |

### 5.3.16 SELF-TEST PACKET COUNT HI REGISTER

Index (In Decimal): 2.10 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_frame_cnt[31:16]** | R/W | 0001h |

### 5.3.17 SELF-TEST STATUS REGISTER

Index (In Decimal): 2.11 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:1 | **RESERVED** | RO | - |
| 0 | **Self_test_done**<br>0 = Self test running<br>1 = Self test finished | RO | 0b |

### 5.3.18 SELF-TEST FRAME COUNT ENABLE REGISTER

Index (In Decimal): 2.12 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:1 | **RESERVED** | RO | - |
| 0 | **Self_test_frame_cnt_en**<br>0 = disabled<br>1 = enabled | R/W | 0b |


© 2018-2021 Microchip Technology Inc.

### 5.3.19 SELF-TEST PGEN ENABLE REGISTER

Index (In Decimal): 2.13 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:1 | **RESERVED** | RO | - |
| 0 | **Self_test_pgen_en**<br>0 = disabled<br>1 = enabled | R/W | 0b |

### 5.3.20 SELF-TEST ENABLE REGISTER

Index (In Decimal): 2.14 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **Self_test_external_clk_sel**<br>When this bit is high, the self-test function requires a clock to be supplied onto the GTX_CLK input pin.<br>When this bit is low, the self-test function does not require a clock to be supplied. | R/W | 0b |
| 14:1 | **RESERVED** | RO | - |
| 0 | **Self_test_en**<br>0 = disabled<br>1 = enabled | R/W | 0b |

### 5.3.21 WAKE-ON-LAN CONTROL REGISTER

Index (In Decimal): 2.16 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **PME Output Select**<br>Controls definition of PME signal when assigned to INT_N.<br>00 = PME<br>01 = Interrupt<br>10 = Interrupt ORed with PME<br>11 = always 0<br><br>Controls definition of PME signal when assigned to LED1.<br>00 = PME<br>01 = LED<br>10 = LED ORed with PME<br>11 = always 1 | R/W | 00b |
| 13:8 | **RESERVED** | R/W | - |
| 7 | **Wake-on-LAN Reset (Wol_reset)**<br>Write a 1 then a 0 to reset the WoL module. | R/W | 0b |
| 6 | **Enable Magic Packet Detection Wake Event**<br>Enables magic packet detection as a wake event | R/W | 0b |
| 5:2 | **Enable Customized Frame Filter Wake Event**<br>Enables customized frame filters as wake events | R/W | 0h |
| 1 | **Enable Link Down Wake Event**<br>Enables link down as a wake event | R/W | 0b |
| 0 | **Enable Link Up Wake Event**<br>Enables link up as a wake event | R/W | 0b |

### 5.3.22 WAKE-ON-LAN-MAC-LO REGISTER

Index (In Decimal): 2.17 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **m-pkt-mac-lo**<br>MAC-Address[15:0] of magic packet | R/W | 0000h |


© 2018-2021 Microchip Technology Inc.

### 5.3.23 WAKE-ON-LAN-MAC-MI REGISTER

Index (In Decimal): 2.18 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **m-pkt-mac-mi**<br>MAC-Address[31:16] of magic packet | R/W | 0000h |

### 5.3.24 WAKE-ON-LAN-MAC-HI REGISTER

Index (In Decimal): 2.19 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **m-pkt-mac-hi**<br>MAC-Address[47:32] of magic packet | R/W | 0000h |

### 5.3.25 CUSTOMIZED-PKT-0-CRC-LO REGISTER

Index (In Decimal): 2.20 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-0-crc-lo**<br>Customized frame filter 0 CRC[15:0] | R/W | 0000h |

### 5.3.26 CUSTOMIZED-PKT-0-CRC-HI REGISTER

Index (In Decimal): 2.21 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-0-crc-hi**<br>Customized frame filter 0 CRC[31:16] | R/W | 0000h |

### 5.3.27 CUSTOMIZED-PKT-1-CRC-LO REGISTER

Index (In Decimal): 2.22 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-1-crc-lo**<br>Customized frame filter 1 CRC[15:0] | R/W | 0000h |

### 5.3.28 CUSTOMIZED-PKT-1-CRC-HI REGISTER

Index (In Decimal): 2.23 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-1-crc-hi**<br>Customized frame filter 1 CRC[31:16] | R/W | 0000h |

### 5.3.29 CUSTOMIZED-PKT-2-CRC-LO REGISTER

Index (In Decimal): 2.24 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-2-crc-lo**<br>Customized frame filter 2 CRC[15:0] | R/W | 0000h |

### 5.3.30 CUSTOMIZED-PKT-2-CRC-HI REGISTER

Index (In Decimal): 2.25 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-2-crc-hi**<br>Customized frame filter 2 CRC[31:16] | R/W | 0000h |


© 2018-2021 Microchip Technology Inc.

### 5.3.31 CUSTOMIZED-PKT-3-CRC-LO REGISTER

Index (In Decimal): 2.26 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-3-crc-lo**<br>Customized frame filter 3 CRC[15:0] | R/W | 0000h |

### 5.3.32 CUSTOMIZED-PKT-3-CRC-HI REGISTER

Index (In Decimal): 2.27 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-3-crc-hi**<br>Customized frame filter 3 CRC[31:16] | R/W | 0000h |

### 5.3.33 CUSTOMIZED-PKT-0-MASK_LL REGISTER

Index (In Decimal): 2.28 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-0-mask-ll**<br>Customized frame filter 0 mask[15:0] | R/W | 0000h |

### 5.3.34 CUSTOMIZED-PKT-0-MASK_LH REGISTER

Index (In Decimal): 2.29 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-0-mask-lh**<br>Customized frame filter 0 mask[31:16] | R/W | 0000h |

### 5.3.35 CUSTOMIZED-PKT-0-MASK_HL REGISTER

Index (In Decimal): 2.30 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-0-mask-hl**<br>Customized frame filter 0 mask[47:32] | R/W | 0000h |

### 5.3.36 CUSTOMIZED-PKT-0-MASK_HH REGISTER

Index (In Decimal): 2.31 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-0-mask-hh**<br>Customized frame filter 0 mask[63:48] | R/W | 0000h |

### 5.3.37 CUSTOMIZED-PKT-1-MASK_LL REGISTER

Index (In Decimal): 2.32 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-1-mask-ll**<br>Customized frame filter 1 mask[15:0] | R/W | 0000h |

### 5.3.38 CUSTOMIZED-PKT-1-MASK_LH REGISTER

Index (In Decimal): 2.33 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-1-mask-lh**<br>Customized frame filter 1 mask[31:16] | R/W | 0000h |


© 2018-2021 Microchip Technology Inc.

### 5.3.39 CUSTOMIZED-PKT-1-MASK_HL REGISTER

Index (In Decimal): 2.34 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-1-mask-hl**<br>Customized frame filter 1 mask[47:32] | R/W | 0000h |

### 5.3.40 CUSTOMIZED-PKT-1-MASK_HH REGISTER

Index (In Decimal): 2.35 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-1-mask-hh**<br>Customized frame filter 1 mask[63:48] | R/W | 0000h |

### 5.3.41 CUSTOMIZED-PKT-2-MASK_LL REGISTER

Index (In Decimal): 2.36 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-2-mask-ll**<br>Customized frame filter 2 mask[15:0] | R/W | 0000h |

### 5.3.42 CUSTOMIZED-PKT-2-MASK_LH REGISTER

Index (In Decimal): 2.37 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-2-mask-lh**<br>Customized frame filter 2 mask[31:16] | R/W | 0000h |

### 5.3.43 CUSTOMIZED-PKT-2-MASK_HL REGISTER

Index (In Decimal): 2.38 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-2-mask-hl**<br>Customized frame filter 2 mask[47:32] | R/W | 0000h |

### 5.3.44 CUSTOMIZED-PKT-2-MASK_HH REGISTER

Index (In Decimal): 2.39 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-2-mask-hh**<br>Customized frame filter 2 mask[63:48] | R/W | 0000h |

### 5.3.45 CUSTOMIZED-PKT-3-MASK_LL REGISTER

Index (In Decimal): 2.40 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-3-mask-ll**<br>Customized frame filter 3 mask[15:0] | R/W | 0000h |

### 5.3.46 CUSTOMIZED-PKT-3-MASK_LH REGISTER

Index (In Decimal): 2.41 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-3-mask-lh**<br>Customized frame filter 3 mask[31:16] | R/W | 0000h |


© 2018-2021 Microchip Technology Inc.

### 5.3.47 CUSTOMIZED-PKT-3-MASK_HL REGISTER

Index (In Decimal): 2.42 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-3-mask-hl**<br>Customized frame filter 3 mask[47:32] | R/W | 0000h |

### 5.3.48 CUSTOMIZED-PKT-3-MASK_HH REGISTER

Index (In Decimal): 2.43 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **c-pkt-3-mask-hh**<br>Customized frame filter 3 mask[63:48] | R/W | 0000h |

### 5.3.49 WAKE-ON-LAN CONTROL STATUS REGISTER

Index (In Decimal): 2.44 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_ctrl_status**<br>Wake-on-LAN Control module status | RO | 0000h |

### 5.3.50 WAKE-ON-LAN CUSTOM PACKET RECEIVE STATUS REGISTER

Index (In Decimal): 2.45 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **cpkt_pmen**<br>custom packet 0 enabled and custom packet 0 found | RO | 0b |
| 14:12 | **mismatch code** | RO | 000b |
| 11 | **good_pkt_crc** | RO | 0b |
| 10:7 | **crc_match**<br>crc matched<br>bit 10 = custom packet 3<br>bit 9 = custom packet 2<br>bit 8 = custom packet 1<br>bit 7 = custom packet 0 | RO | 0000b |
| 6:3 | **cpkt_found**<br>custom packet found<br>bit 6 = custom packet 3<br>bit 5 = custom packet 2<br>bit 4 = custom packet 1<br>bit 3 = custom packet 0 | RO | 0000b |
| 2:0 | **cpkt_state**<br>custom packet detection state | RO | 000b |

### 5.3.51 WAKE-ON-LAN MAGIC PACKET RECEIVE STATUS REGISTER

Index (In Decimal): 2.46 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **mpkt_pmen**<br>magic packet enabled and magic packet found | RO | 0b |
| 14:12 | **byte count** | RO | 000b |
| 11:9 | **mismatch code** | RO | 000b |
| 8:5 | **macda_match_count** | RO | 0h |
| 4 | **good_pkt_crc** | RO | 0b |
| 3 | **mpkt_found**<br>magic packet found | RO | 0b |
| 2:0 | **mpkt_state**<br>magic packet detection state | RO | 000b |


© 2018-2021 Microchip Technology Inc.

### 5.3.52 WAKE-ON-LAN DATA MODULE STATUS REGISTER

Index (In Decimal): 2.47 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_data_status**<br>Wake-on-LAN Data module status | RO | 0000h |

### 5.3.53 CUSTOMIZED PKT-0 RECEIVED CRC-L REGISTER

Index (In Decimal): 2.48 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_0 [15:0]**<br>Wake-on-LAN CRC [15:0] calculated on Customized frame filter 0 | RO | 0000h |

### 5.3.54 CUSTOMIZED PKT-0 RECEIVED CRC-H REGISTER

Index (In Decimal): 2.49 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_0 [31:16]**<br>Wake-on-LAN CRC [31:16] calculated on Customized frame filter 0 | RO | 0000h |

### 5.3.55 CUSTOMIZED PKT-1 RECEIVED CRC-L REGISTER

Index (In Decimal): 2.50 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_1 [15:0]**<br>Wake-on-LAN CRC [15:0] calculated on Customized frame filter 1 | RO | 0000h |

© 2018-2021 Microchip Technology Inc.

### 5.3.56 CUSTOMIZED PKT-1 RECEIVED CRC-H REGISTER

Index (In Decimal): 2.51 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_1 [31:16]**<br>Wake-on-LAN CRC [31:16] calculated on Customized frame filter 1 | RO | 0000h |

### 5.3.57 CUSTOMIZED PKT-2 RECEIVED CRC-L REGISTER

Index (In Decimal): 2.52 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_2 [15:0]**<br>Wake-on-LAN CRC [15:0] calculated on Customized frame filter 2 | RO | 0000h |

### 5.3.58 CUSTOMIZED PKT-2 RECEIVED CRC-H REGISTER

Index (In Decimal): 2.53 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_2 [31:16]**<br>Wake-on-LAN CRC [31:16] calculated on Customized frame filter 2 | RO | 0000h |

### 5.3.59 CUSTOMIZED PKT-3 RECEIVED CRC-L REGISTER

Index (In Decimal): 2.54 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_3 [15:0]**<br>Wake-on-LAN CRC [15:0] calculated on Customized frame filter 3 | RO | 0000h |


© 2018-2021 Microchip Technology Inc.

### 5.3.60 CUSTOMIZED PKT-3 RECEIVED CRC-H REGISTER

Index (In Decimal): 2.55 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Wol_crc_rcv_3 [31:16]**<br>Wake-on-LAN CRC [31:16] calculated on Customized frame filter 3 | RO | 0000h |

### 5.3.61 SELF-TEST CORRECT COUNT LO REGISTER

Index (In Decimal): 2.60 Size: 16 bits

Following a self-test, this register along with Self-Test Correct Count HI Register indicate the count of frames with a correct FCS.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_correct_cnt[15:0]** | RO | - |

### 5.3.62 SELF-TEST CORRECT COUNT HI REGISTER

Index (In Decimal): 2.61 Size: 16 bits

Following a self-test, this register along with Self-Test Correct Count LO Register indicate the count of frames with a correct FCS.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_correct_cnt[31:16]** | RO | - |

### 5.3.63 SELF-TEST ERROR COUNT LO REGISTER

Index (In Decimal): 2.62 Size: 16 bits

Following a self-test, this register along with Self-Test Error Count HI Register indicate the count of frames with an incorrect FCS.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_error_cnt[15:0]** | RO | - |

### 5.3.64 SELF-TEST ERROR COUNT HI REGISTER

Index (In Decimal): 2.63 Size: 16 bits

Following a self-test, this register along with Self-Test Error Count LO Register indicate the count of frames with an incorrect FCS.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_error_cnt[31:16]** | RO | - |

### 5.3.65 SELF-TEST BAD SFD COUNT LO REGISTER

Index (In Decimal): 2.64 Size: 16 bits

Following a self-test, this register along with Self-Test Bad SFD Count HI Register indicate the count of frames with a bad SFD.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_bad_sfd_cnt[15:0]** | RO | - |

### 5.3.66 SELF-TEST BAD SFD COUNT HI REGISTER

Index (In Decimal): 2.65 Size: 16 bits

Following a self-test, this register along with Self-Test Bad SFD Count LO Register indicate the count of frames with a bad SFD.

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Self_test_bad_sfd_cnt[31:16]** | RO | - |


© 2018-2021 Microchip Technology Inc.

### 5.3.67 PCS CONTROL 1 REGISTER

Index (In Decimal): 3.0 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **RESET**<br>1=PCS reset<br>0=Normal Operation<br><br>This bit is not used | R/W | 0b |
| 14 | **Loop Back**<br>1 = enable loop-back mode<br>0 = Normal Operation<br><br>This bit is not used | R/W | 0b |
| 13 | **Speed Selection**<br>(bit13 / bit6)<br>11 = bit 5:2 select speed<br>0x = unspecified<br>x0 = unspecified<br><br>This bit is not used | R/W | 0b |
| 12 | **EEE100_idle_sel**<br>0 = 9031<br>1 = 8050 | R/W | 0b |
| 11 | **Low power**<br>1 = low-power-mode<br>0 = normal operation | R/W | 0b |
| 10 | **Clock-stop enable**<br>1 = the PHY may stop the clock during LPI<br>0 = clock not stoppable | R/W | 0b |
| 9:7 | **TX FIFO threshold** | R/W | 111b |
| 6 | **Speed Selection**<br>(bit13 / bit6)<br>11 = bit 5:2 select speed<br>0x = unspecified<br>x0 = unspecified<br><br>This bit is not used | R/W | 0b |

| Bits | Description | Type | Default |
|---|---|---|---|
| 5:2 | **Speed Selection**<br>(bits [5:2])<br>1 x x x = Reserved<br>0 1 1 x = Reserved<br>0 1 0 1 = Reserved<br>0 1 0 0 = 100Gb/s<br>0 0 1 1 = 40Gb/s<br>0 0 1 0 = 10/1Gb/s<br>0 0 0 1 = 10PASS-TS/2BASE-TL<br>0 0 0 0 = 10Gb/s<br><br>These bits are not used | R/W | 0000b |
| 1 | **RESERVED** | R/W | - |
| 0 | **Dbg_pcs100_sel**<br>1 = select eee100 RX signals<br>0 = original | R/W | 0b |

### 5.3.68 PCS STATUS 1 REGISTER

Index (In Decimal): 3.1 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:12 | **RESERVED** | RO | - |
| 11 | **TX LPI received**<br>1 = TX PCS has received LPI<br>0 = LPI not received | RO/LH | 0b |
| 10 | **RX LPI received**<br>1 = RX PCS has received LPI<br>0 = LPI not received | RO/LH | 0b |
| 9 | **TX LPI indication**<br>1 = TX PCS is currently receiving LPI<br>0 = PCS is not currently receiving LPI | RO | 0b |
| 8 | **RX LPI indication**<br>1 = RX PCS is currently receiving LPI<br>0 = PCS is not currently receiving LPI | RO | 0b |
| 7 | **Fault**<br>1 = Fault condition detected<br>0 = No fault condition detected | RO | 0b |
| 6 | **Clock stop capable**<br>1 = The MAC may stop the clock during LPI<br>0 = Clock not stoppable | RO | 1b |
| 5:3 | **RESERVED** | RO | - |


© 2018-2021 Microchip Technology Inc.

| Bits | Description | Type | Default |
|---|---|---|---|
| 2 | **PCS receive link status**<br>1 = PCS receive link up<br>0 = PCS receive link down | RO | 0b |
| 1 | **Low-power ability**<br>1 = PCS supports low-power mode<br>0 = PCS does not support low-power mode | RO | Note 5-11 |
| 0 | **RESERVED** | RO | - |

**Note 5-11** This bit is a 1 if either the 1000BASE-T EEE or 100BASE-TX EEE bit in the EEE Advertisement Register is set. Otherwise it is a 0.

### 5.3.69 EEE QUIET TIMER REGISTER

Index (In Decimal): 3.8 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Quiet-Timer**<br>1G-EEE quieter Timer Max Value | R/W | 006Eh |

### 5.3.70 EEE UPDATE TIMER REGISTER

Index (In Decimal): 3.9 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **Update-Timer**<br>1G-EEE Update Timer Max Value | R/W | 005Fh |

### 5.3.71 EEE LINK-FAIL TIMER REGISTER

Index (In Decimal): 3.10 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | - |
| 7:0 | **Link-Fail-Timer**<br>1G-EEE Link-Fail Timer Max Value | R/W | 5Ah |

### 5.3.72 EEE POST-UPDATE TIMER REGISTER

Index (In Decimal): 3.11 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | - |
| 7:0 | **Post-Update-Timer**<br>1G-EEE Post-Update Timer Max Value | R/W | 50h |

### 5.3.73 EEE WAITWQ TIMER REGISTER

Index (In Decimal): 3.12 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | - |
| 7:0 | **WaitWQ-Timer**<br>1G-EEE WaitWQ Timer Max Value | R/W | 5Bh |

### 5.3.74 EEE WAKE TIMER REGISTER

Index (In Decimal): 3.13 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | - |
| 7:0 | **Wake-Timer**<br>1G-EEE Wake Timer Max Value | R/W | 89h |


© 2018-2021 Microchip Technology Inc.

### 5.3.75 EEE WAKETX TIMER REGISTER

Index (In Decimal): 3.14 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | - |
| 7:0 | **WakeTX-Timer**<br>1G-EEE WakeTX Timer Max Value | R/W | 21h |

### 5.3.76 EEE WAKEMZ TIMER REGISTER

Index (In Decimal): 3.15 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RESERVED** | R/W | - |
| 7:0 | **WakeMz-Timer**<br>1G-EEE WakeMz Timer Max Value | R/W | 6Eh |

### 5.3.77 EEE CONTROL AND CAPABILITY REGISTER

Index (In Decimal): 3.20 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **RESERVED** | RO | - |
| 13 | **100GBASE-R deep sleep**<br>1 = EEE deep sleep is supported for 100GBASE-R<br>0 = EEE deep sleep is not supported for 100GBASE-R<br>**Note:** The device does not support this mode. | RO | 0b |
| 12 | **100GBASE-R fast wake**<br>1 = EEE fast wake is supported for 100GBASE-R<br>0 = EEE fast wake is not supported for 100GBASE-R<br>**Note:** The device does not support this mode. | RO | 0b |
| 11:10 | **RESERVED** | RO | - |
| 9 | **40GBASE-R deep sleep**<br>1 = EEE deep sleep is supported for 40GBASE-R<br>0 = EEE deep sleep is not supported for 40GBASE-R<br>**Note:** The device does not support this mode. | RO | 0b |

| Bits | Description | Type | Default |
|---|---|---|---|
| 8 | **40GBASE-R fast wake**<br>1 = EEE fast wake is supported for 40GBASE-R<br>0 = EEE fast wake is not supported for 40GBASE-R<br>**Note:** The device does not support this mode. | RO | 0b |
| 7 | **RESERVED** | RO | - |
| 6 | **10GBASE-KR EEE**<br>0 = EEE is not supported for 10GBASE-KR.<br>1 = EEE is supported for 10GBASE-KR.<br>**Note:** The device does not support this mode. | RO | 0b |
| 5 | **10GBASE-KX4 EEE**<br>0 = EEE is not supported for 10GBASE-KX4.<br>1 = EEE is supported for 10GBASE-KX4.<br>**Note:** The device does not support this mode. | RO | 0b |
| 4 | **10GBASE-KX EEE**<br>0 = EEE is not supported for 10GBASE-KX.<br>1 = EEE is supported for 10GBASE-KX.<br>**Note:** The device does not support this mode. | RO | 0b |
| 3 | **10GBASE-T EEE**<br>0 = EEE is not supported for 10GBASE-T.<br>1 = EEE is supported for 10GBASE-T.<br>**Note:** The device does not support this mode. | RO | 0b |
| 2 | **1000BASE-T EEE**<br>0 = EEE is not supported for 1000BASE-T.<br>1 = EEE is supported for 1000BASE-T. | RO | 0b |
| 1 | **100BASE-TX EEE**<br>0 = EEE is not supported for 100BASE-TX.<br>1 = EEE is supported for 100BASE-TX. | RO | 0b |
| 0 | **RESERVED** | RO | - |

### 5.3.78 EEE WAKE ERROR COUNTER REGISTER

Index (In Decimal): 3.22 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:0 | **EEE Wake Error Counter**<br>This counter is cleared to zeros on read and is held to all ones on overflow. | RC | 0000h |


© 2018-2021 Microchip Technology Inc.

### 5.3.79 EEE 100 TIMER-0 REGISTER

Index (In Decimal): 3.24 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **TX_SLEEP_TIMER_ADD**<br>tx_sleep_time = (5250 + TX_SLEEP_TIMER_ADD * 32) * 40ns | R/W | 00h |
| 7:1 | **TX_WAKE_TIMER_ADD**<br>tx_wake_time = (512 + TX_WAKE_TIMER_ADD * 32) * 40ns | R/W | 00h |
| 0 | **RESERVED** | R/W | 0b |

### 5.3.80 EEE 100 TIMER-1 REGISTER

Index (In Decimal): 3.25 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RX_SLEEP_TIMER_ADD**<br>rx_sleep_time = (6250 + RX_SLEEP_TIMER_ADD * 32) * 40ns | R/W | 00h |
| 7:1 | **TX_QUIET_TIMER_ADD**<br>tx_quiet_time = (525000 + TX_QUIET_TIMER_ADD * 8192) * 40ns | R/W | 00h |
| 0 | **eee_100_test**<br>1 = force TX LPI | R/W | 0b |

### 5.3.81 EEE 100 TIMER-2 REGISTER

Index (In Decimal): 3.26 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:12 | **RX_WAIT_IDLE_EXIT_TIMER_ADD**<br>rx_wait_idle_exit_time = (16 + RX_WAIT_IDLE_EXIT_TIMER_ADD * 2) * 40ns | R/W | 0h |
| 11:8 | **RX_IDLE_WAIT_TIMER_ADD**<br>rx_idle_wait_time = (20 + RX_IDLE_WAIT_TIMER_ADD * 2) * 40ns | R/W | 0h |
| 7:0 | **RX_QUIET_TIMER_ADD**<br>rx_quiet_time = (625000 + RX_QUIET_TIMER_ADD * 4096) * 40ns | R/W | 00h |

### 5.3.82 EEE 100 TIMER-3 REGISTER

Index (In Decimal): 3.27 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:8 | **RX_WAKE_TIMER_ADD**<br>rx_wake_time = (512 + RX_WAKE_TIMER_ADD * 4) * 40ns | R/W | 00h |
| 7:0 | **RX_LINK_FAIL_TIMER_ADD**<br>rx_link_fail_time = (2500 + RX_LINK_FAIL_TIMER_ADD * 16) * 40ns | R/W | 00h |

### 5.3.83 EEE ADVERTISEMENT REGISTER

Index (In Decimal): 7.60 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **RESERVED** | R/W | - |
| 13 | **100GBASE-CR4 EEE**<br>0 = Do not advertise EEE capability for 100GBASE-CR4 deep sleep<br>1 = Advertise EEE capability for 100GBASE-CR4 deep sleep<br>**Note:** The device does not support this mode.<br>This bit is not used. | R/W | 0b |
| 12 | **100GBASE-KR4 EEE**<br>0 = Do not advertise EEE capability for 100GBASE-KR4 deep sleep<br>1 = Advertise EEE capability for 100GBASE-KR4 deep sleep<br>**Note:** The device does not support this mode.<br>This bit is not used. | R/W | 0b |
| 11 | **100GBASE-KP4 EEE**<br>0 = Do not advertise EEE capability for 100GBASE-KP4 deep sleep<br>1 = Advertise EEE capability for 100GBASE-KP4 deep sleep<br>**Note:** The device does not support this mode.<br>This bit is not used. | R/W | 0b |
| 10 | **100GBASE-CR10 EEE**<br>0 = Do not advertise EEE capability for 100GBASE-CR10 deep sleep<br>1 = Advertise EEE capability for 100GBASE-CR10 deep sleep<br>**Note:** The device does not support this mode. | R/W | 0b |
| 9 | **RESERVED** | R/W | - |
| 8 | **40GBASE-CR4 EEE**<br>0 = Do not advertise EEE capability for 40GBASE-CR4 deep sleep<br>1 = Advertise EEE capability for 40GBASE-CR4 deep sleep<br>**Note:** The device does not support this mode. | R/W | 0b |


© 2018-2021 Microchip Technology Inc.

| Bits | Description | Type | Default |
|---|---|---|---|
| 7 | **40GBASE-KR4 EEE**<br>0 = Do not advertise EEE capability for 40GBASE-KR4 deep sleep<br>1 = Advertise EEE capability for 40GBASE-KR4 deep sleep<br>**Note:** The device does not support this mode. | R/W | 0b |
| 6 | **10GBASE-KR EEE**<br>0 = Do not advertise EEE capability for 10GBASE-KR<br>1 = Advertise EEE capability for 10GBASE-KR<br>**Note:** The device does not support this mode. | R/W | 0b |
| 5 | **10GBASE-KX4 EEE**<br>0 = Do not advertise EEE capability for 10GBASE-KX4<br>1 = Advertise EEE capability for 10GBASE-KX4<br>**Note:** The device does not support this mode. | R/W | 0b |
| 4 | **10GBASE-KX EEE**<br>0 = Do not advertise EEE capability for 10GBASE-KX<br>1 = Advertise EEE capability for 10GBASE-KX<br>**Note:** The device does not support this mode. | R/W | 0b |
| 3 | **10GBASE-T EEE**<br>0 = Do not advertise EEE capability for 10GBASE-T<br>1 = Advertise EEE capability for 10GBASE-T<br>**Note:** The device does not support this mode. | R/W | 0b |
| 2 | **1000BASE-T EEE**<br>0 = Do not advertise EEE capability for 1000BASE-T<br>1 = Advertise EEE capability for 1000BASE-T | R/W | 1b |
| 1 | **100BASE-TX EEE**<br>0 = Do not advertise EEE capability for 100BASE-TX.<br>1 = Advertise EEE capability for 100BASE-TX. | R/W | 1b |
| 0 | **RESERVED** | R/W | - |

### 5.3.84 EEE LINK PARTNER ABILITY REGISTER

Index (In Decimal): 7.61 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:11 | **RESERVED** | R/W | - |
| 10 | **100GBASE-CR10 EEE**<br>0 = Link partner does not advertise EEE deep sleep capability for 100GBASE-CR10.<br>1 = Link partner advertises EEE deep sleep capability for 100GBASE-CR10.<br>**Note:** This device does not support this mode. | RO | 0b |
| 9 | **RESERVED** | RO | 0b |
| 8 | **40GBASE-CR4 EEE**<br>0 = Link partner does not advertise EEE deep sleep capability for 40GBASE-CR4.<br>1 = Link partner advertises EEE deep sleep capability for 40GBASE-CR4.<br>**Note:** This device does not support this mode. | RO | 0b |
| 7 | **40GBASE-KR4 EEE**<br>0 = Link partner does not advertise EEE deep sleep capability for 40GBASE-KR4.<br>1 = Link partner advertises EEE deep sleep capability for 40GBASE-KR4.<br>**Note:** This device does not support this mode. | RO | 0b |
| 6 | **10GBASE-KR EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-KR.<br>1 = Link partner advertises EEE capability for 10GBASE-KR.<br>**Note:** This device does not support this mode. | RO | 0b |
| 5 | **10GBASE-KX4 EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-KX4.<br>1 = Link partner advertises EEE capability for 10GBASE-KX4.<br>**Note:** This device does not support this mode. | RO | 0b |
| 4 | **10GBASE-KX EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-KX.<br>1 = Link partner advertises EEE capability for 10GBASE-KX.<br>**Note:** This device does not support this mode. | RO | 0b |
| 3 | **10GBASE-T EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-T.<br>1 = Link partner advertises EEE capability for 10GBASE-T.<br>**Note:** This device does not support this mode. | RO | 0b |
| 2 | **1000BASE-T EEE**<br>0 = Link partner does not advertise EEE capability for 1000BASE-T.<br>1 = Link partner advertises EEE capability for 1000BASE-T. | RO | 0b |
| 1 | **100BASE-TX EEE**<br>0 = Link partner does not advertise EEE capability for 100BASE-TX.<br>1 = Link partner advertises EEE capability for 100BASE-TX. | RO | 0b |
| 0 | **RESERVED** | RO | - |


© 2018-2021 Microchip Technology Inc.

### 5.3.85 EEE LINK PARTNER ABILITY OVERRIDE REGISTER

Index (In Decimal): 7.62 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **LP AN Override**<br>0 = Use Link partner AN results<br>1 = Use bits 10:0 as Link partner results | R/W | 0b |
| 14:11 | **RESERVED** | R/W | - |
| 10 | **100GBASE-CR10 EEE**<br>0 = Link partner does not advertise EEE deep sleep capability for 100GBASE-CR10.<br>1 = Link partner advertises EEE deep sleep capability for 100GBASE-CR10.<br>**Note:** This device does not support this mode. | R/W | 0b |
| 9 | **RESERVED** | R/W | - |
| 8 | **40GBASE-CR4 EEE**<br>0 = Link partner does not advertise EEE deep sleep capability for 40GBASE-CR4.<br>1 = Link partner advertises EEE deep sleep capability for 40GBASE-CR4.<br>**Note:** This device does not support this mode. | R/W | 0b |
| 7 | **40GBASE-KR4 EEE**<br>0 = Link partner does not advertise EEE deep sleep capability for 40GBASE-KR4.<br>1 = Link partner advertises EEE deep sleep capability for 40GBASE-KR4.<br>**Note:** This device does not support this mode. | R/W | 0b |
| 6 | **10GBASE-KR EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-KR.<br>1 = Link partner advertises EEE capability for 10GBASE-KR.<br>**Note:** This device does not support this mode. | R/W | 0b |
| 5 | **10GBASE-KX4 EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-KX4.<br>1 = Link partner advertises EEE capability for 10GBASE-KX4.<br>**Note:** This device does not support this mode. | R/W | 0b |
| 4 | **10GBASE-KX EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-KX.<br>1 = Link partner advertises EEE capability for 10GBASE-KX.<br>**Note:** This device does not support this mode. | R/W | 0b |
| 3 | **10GBASE-T EEE**<br>0 = Link partner does not advertise EEE capability for 10GBASE-T.<br>1 = Link partner advertises EEE capability for 10GBASE-T.<br>**Note:** This device does not support this mode. | R/W | 0b |
| 2 | **1000BASE-T EEE**<br>0 = Link partner does not advertise EEE capability for 1000BASE-T.<br>1 = Link partner advertises EEE capability for 1000BASE-T. | R/W | 0b |

| Bits | Description | Type | Default |
|---|---|---|---|
| 1 | **100BASE-TX EEE**<br>0 = Link partner does not advertise EEE capability for 100BASE-TX.<br>1 = Link partner advertises EEE capability for 100BASE-TX. | R/W | 0b |
| 0 | **RESERVED** | R/W | - |

### 5.3.86 EEE MESSAGE CODE REGISTER

Index (In Decimal): 7.63 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:11 | **RESERVED** | R/W | - |
| 10:0 | **EEE_message_code**<br>Programmable EEE specific message code for AN | R/W | 00Ah |

### 5.3.87 XTAL CONTROL REGISTER

Index (In Decimal): 28.1 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:14 | **RESERVED** | R/W | - |
| 13 | **XTAL Disable**<br>Crystal oscillator disable<br>0 = XTAL enabled<br>1 = XTAL disabled | R/W | 0b |
| 12:0 | **RESERVED** | R/W | - |


© 2018-2021 Microchip Technology Inc.

### 5.3.88 AFED CONTROL REGISTER

Index (In Decimal): 28.9 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:10 | **RESERVED** | RO | - |
| 9 | **p_cat3**<br>0 = cat5 parameter for 10 Base-T TX<br>1 = cat3 parameter for 10 Base-T TX | R/W | 0b |
| 8:0 | **RESERVED** | RO | - |

### 5.3.89 LDO CONTROL REGISTER

Index (In Decimal): 28.14 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15 | **LDO enable**<br>turn off VDD regulator by software<br>1 = off<br>0 = on | R/W | 0b |
| 14:0 | **RESERVED** | R/W | - |

### 5.3.90 EDPD CONTROL REGISTER

Index (In Decimal): 28.36 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:6 | **RESERVED** | RO | - |
| 5:4 | **p_edpd_mask_timer[1:0]**<br>00 = EDPD mask for 2.6us<br>01 = 3.2us<br>10 = 4.0us<br>11 = 5.0us | R/W | 00b |
| 3:2 | **p_edpd_timer[1:0]**<br>00 = EDPD pulse separation for 1s<br>01 = 1.3s<br>10 = 1.6s<br>11 = 1.9s | R/W | 00b |

| Bits | Description | Type | Default |
|---|---|---|---|
| 1 | **p_EDPD_random_dis**<br>1 = use edpd_timer value as EDPD pulse separation selection<br>0 = use random seed value as EDPD pulse separation selection | R/W | 0b |
| 0 | **EDPD Mode Enable**<br>0 = EDPD mode disabled<br>1 = EDPD mode enabled | R/W | 0b |

### 5.3.91 EMITX CONTROL REGISTER

Index (In Decimal): 28.37 Size: 16 bits

| Bits | Description | Type<br>Note 5-12 | Default<br>Note 5-12 |
|---|---|---|---|
| 15:2 | **RESERVED** | RO | - |
| 1:0 | **p_scale** | RO / R/W | 00b / 01b |

**Note 5-12** The type and default value depends on the Quiet-WIRE Enable bit in MMD31 Register 19. The values are listed as Quiet-WIRE Enable = 0 / Quiet-WIRE Enable = 1.

### 5.3.92 EMITX COEFFICIENT REGISTERS

Index (In Decimal): 28.38-52 Size: 16 bits

| Register | Bits | Description | Type<br>Note 5-13 | Default<br>Note 5-13 |
|---|---|---|---|---|
| 38 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff1** | RO / R/W | 31d / 14d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff0** | RO / R/W | 15d / 3d |
| 39 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff3** | RO / R/W | 31d / 48d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff2** | RO / R/W | 31d / 32d |


© 2018-2021 Microchip Technology Inc.

| Register | Bits | Description | Type Note 5-13 | Default Note 5-13 |
|---|---|---|---|---|
| 40 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff5** | RO / R/W | 0d / 46d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff4** | RO / R/W | 16d / 54d |
| 41 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff7** | RO / R/W | 0d / 11d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff6** | RO / R/W | 0d / 28d |
| 42 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff9** | RO / R/W | 0d / 126d (-2d) |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff8** | RO / R/W | 0d / 1d |
| 43 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff11** | RO / R/W | 0d / 127d (-1d) |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff10** | RO / R/W | 0d / 126d (-2d) |
| 44 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff13** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff12** | R/W / R/W | 0d / 0d |
| 45 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff15** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff14** | R/W / R/W | 0d / 0d |
| 46 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff17** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff16** | R/W / R/W | 0d / 0d |

| Register | Bits | Description | Type Note 5-13 | Default Note 5-13 |
|---|---|---|---|---|
| 47 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff19** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff18** | R/W / R/W | 0d / 0d |
| 48 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff21** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff20** | R/W / R/W | 0d / 0d |
| 49 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff23** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff22** | R/W / R/W | 0d / 0d |
| 50 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff25** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff24** | R/W / R/W | 0d / 0d |
| 51 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff27** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff26** | R/W / R/W | 0d / 0d |
| 52 | 15 | **RESERVED** | RO | - |
| | 14:8 | **p_coeff29** | R/W / R/W | 0d / 0d |
| | 7 | **RESERVED** | RO | - |
| | 6:0 | **p_coeff28** | R/W / R/W | 0d / 0d |

**Note 5-13** The type and default value depends on the Quiet-WIRE Enable bit in MMD31 Register 19. The values are listed as Quiet-WIRE Enable = 0 / Quiet-WIRE Enable = 1.


© 2018-2021 Microchip Technology Inc.

### 5.3.93 MMD31 REGISTER 19

Index (In Decimal): 31.19 Size: 16 bits

| Bits | Description | Type | Default |
|---|---|---|---|
| 15:11 | **RESERVED** | RO | - |
| 10 | **Quiet-WIRE Enable**<br>1 = Enable Quiet-WIRE®<br>0 = Disable Quiet-WIRE® | R/W | 0b |
| 9:0 | **RESERVED** | RO | - |

# 6.0 OPERATIONAL CHARACTERISTICS

## 6.1 Absolute Maximum Ratings*

Supply Voltage ($V_{IN}$)
(DVDDL, AVDDL, AVDDL_PLL) ..... –0.5V to +1.8V
(AVDDH) ..... –0.5V to +5.0V
(DVDDH) ..... –0.5V to +5.0V
Input Voltage (all inputs) ..... –0.5V to +5.0V
Output Voltage (all outputs) ..... –0.5V to +5.0V
Lead Temperature (soldering, 10s) ..... +260°C
Storage Temperature ($T_S$) ..... –55°C to +150°C
HBM ESD Performance ..... +/-5kV

*Exceeding the absolute maximum rating may damage the device. Stresses greater than the absolute maximum rating may cause permanent damage to the device. Operation of the device at these or any other conditions above those specified in the operating sections of this specification is not implied. Maximum conditions for extended periods may affect reliability.

## 6.2 Operating Ratings**

Supply Voltage
(DVDDL, AVDDL, AVDDL_PLL) ..... +1.140V to +1.320V
(AVDDH @ 3.3V) ..... +3.135V to +3.630V
(AVDDH @ 2.5V) ..... +2.375V to +2.750V
(DVDDH @ 3.3V) ..... +3.135V to +3.630V
(DVDDH @ 2.5V) ..... +2.375V to +2.750V
(DVDDH @ 1.8V) ..... +1.710V to +1.980V
Input voltage (all inputs) ..... -0.3 V to +3.63 V
Output voltage (all outputs) ..... -0.3 V to +3.63 V
Ambient Temperature
($T_A$ Commercial: KSZ9131MNXC) ..... 0°C to +70°C
($T_A$ Industrial: KSZ9131MNXI) ..... –40°C to +85°C
Maximum Junction Temperature ($T_J$ max.) ..... +125°C

**The device is not guaranteed to function outside its operating ratings.

| **Note:** | Do not drive input signals without power supplied to the device. |
|---|---|


© 2018-2021 Microchip Technology Inc.

## 6.3 Package Thermal Specifications

Thermal parameters are measured or estimated for devices with the ground soldered to thermal vias in a multilayer 2S2P PCB per JESD51. Thermal resistance is measured from the die to the ambient air. The values provided are based on the package body, die size, maximum power consumption.

**TABLE 6-1: PACKAGE THERMAL PARAMETERS**

| Parameter | Symbol | Value | Units | Notes |
|---|---|---|---|---|
| Junction-to-Ambient | $\Theta_{JA}$ | 26 | °C/W | 0 Meters/second |
| | | 22 | °C/W | 1 Meters/second |
| | | 20 | °C/W | 2.5 Meters/second |
| Junction-to-Top-of-Package | $\Psi_{JT}$ | 0.2 | °C/W | 0 Meters/second |
| Junction-to-Board | $\Psi_{JB}$ | 13 | °C/W | 0 Meters/second |
| Junction-to-Case | $\Theta_{JC}$ | 2.5 | °C/W | - |
| Junction-to-Board | $\Theta_{JB}$ | 14 | °C/W | - |
| Maximum Power Dissipation | $P_{MAX}$ | 756 | mW | 1000BASE-T Traffic, 3.3V I/O |

Use the following formulas to calculate the junction temperature:

$$T_J = P \times \Theta_{JA} + T_A$$

$$T_J = P \times \Psi_{JT} + T_T$$

$$T_J = P \times \Theta_{JC} + T_C$$

**TABLE 6-2: PACKAGE THERMALS LEGEND**

| Symbol | Description |
|---|---|
| $T_J$ | Junction temperature |
| P | Power dissipated |
| $\Theta_{JA}$ | Junction-to-ambient-temperature |
| $\Theta_{JC}$ | Junction-to-top-of-package |
| $\Psi_{JT}$ | Junction-to-bottom-of-case |
| $T_A$ | Ambient temperature |
| $T_C$ | Temperature of the bottom of the case |
| $T_T$ | Temperature of the top of the case |

## 6.4 Power Consumption

This section details the device power measurements taken over various operating conditions. Unless otherwise noted, all measurements were taken with power supplies at nominal values. Refer to Section 4.18, Power Management for a description of the power down modes.

**TABLE 6-3: POWER CONSUMPTION**

| Mode | Typical Power (mW) DVDDH=3.3V, AVDDH=3.3V | Typical Power (mW) DVDDH=2.5V, AVDDH=2.5V |
|---|---|---|
| **1000BASE-T Traffic (GMII)** | 707.1 | 544.0 |
| **100BASE-TX Traffic (GMII)** | 268.8 | 194.0 |
| **10BASE-T Traffic (GMII)** | 163.5 | 119.1 |
| **10BASE-Te Traffic (GMII)** | 147.0 | 101.6 |
| **Chip Power-Down (CPD)** | 3.4 | 3.4 |
| **Energy-Detect Power-Down (EDPD)** | 55.2 | 32.4 |
| **EEE 1000BASE-T Idle** | 236.7 | 140.2 |
| **EEE 100BASE-TX Idle** | 108.6 | 78.5 |
| **Normal Operation (No Link)** | 175.8 | 128.6 |
| **RESET** | 61.2 | 43.4 |
| **Software Power-Down (SPD)** | 19.8 | 10.0 |
| **Max Power (85°C w/AVDDH/DVDDH +10°)** | 928.3 | 681.9 |
| **Max Power (105°C w/AVDDH/DVDDH +10°)** | 938.9 | 692.5 |

**TABLE 6-4: TYPICAL CURRENT/POWER CONSUMPTION TRANSCEIVER (3.3V), DIGITAL I/O (3.3V)**

| Condition | 1.2V Core (DVDDL, AVDDL, AVDDL_PLL) | 3.3V Transceiver (AVDDH) | 3.3V Digital I/O (DVDDH) | Total Power |
|---|---|---|---|---|
| 1000BT Idle (GMII 3V3 IO) | 210.0 mA | 90.0 mA | 15.0 mA | 598.5 mW |
| 1000BT Traffic (GMII 3V3 IO) | 218.0 mA | 89.0 mA | 46.0 mA | 707.1 mW |
| 100BTX Idle (GMII 3V3 IO) | 70.0 mA | 45.0 mA | 5.0 mA | 249.0 mW |
| 100BTX Traffic (GMII 3V3 IO) | 70.0 mA | 42.0 mA | 12.0 mA | 262.2 mW |
| 100BTX Idle (MII 3V3 IO) | 70.0 mA | 42.0 mA | 10.0 mA | 255.6 mW |
| 100BTX Traffic (MII 3V3 IO) | 70.0 mA | 43.0 mA | 13.0 mA | 268.8 mW |
| 10BT Idle (GMII 3V3 IO) | 18.0 mA | 26.0 mA | 3.0 mA | 117.3 mW |
| 10BT Traffic (GMII 3V3 IO) | 18.0 mA | 41.0 mA | 3.0 mA | 166.8 mW |
| 10BT Idle (MII 3V3 IO) | 18.0 mA | 26.0 mA | 3.0 mA | 117.3 mW |
| 10BT Traffic (MII 3V3 IO) | 18.0 mA | 40.0 mA | 3.0 mA | 163.5 mW |
| 10BTe Idle (GMII 3V3 IO) | 18.0 mA | 26.0 mA | 3.0 mA | 117.3 mW |
| 10BTe Traffic (GMII 3V3 IO) | 18.0 mA | 34.0 mA | 3.0 mA | 143.7 mW |
| 10BTe Idle (MII 3V3 IO) | 18.0 mA | 24.0 mA | 2.0 mA | 107.4 mW |
| 10BTe Traffic (MII 3V3 IO) | 18.0 mA | 35.0 mA | 3.0 mA | 147.0 mW |
| EDPD | 2.0 mA | 15.0 mA | 1.0 mA | 55.2 mW |
| EEE 1000BT Idle | 46.0 mA | 33.0 mA | 22.0 mA | 236.7 mW |
| EEE 100BTX Idle | 30.0 mA | 14.0 mA | 8.0 mA | 108.6 mW |
| RESET | 7.0 mA | 15.0 mA | 1.0 mA | 61.2 mW |
| SFPD | 0.0 mA | 5.0 mA | 1.0 mA | 19.8 mW |


© 2018-2021 Microchip Technology Inc.

**TABLE 6-5: TYPICAL CURRENT/POWER CONSUMPTION TRANSCEIVER (2.5V), DIGITAL I/O (2.5V)**

| Condition | 1.2V Core (DVDDL, AVDDL, AVDDL_PLL) | 2.5V Transceiver (AVDDH) | 2.5V Digital I/O (DVDDH) | Total Power |
|---|---|---|---|---|
| 1000BT Idle (GMII 2V5 IO) | 208.0 mA | 77.0 mA | 11.0 mA | 469.6 mW |
| 1000BT Traffic (GMII 2V5 IO) | 220.0 mA | 76.0 mA | 36.0 mA | 544.0 mW |
| 100BTX Idle (GMII 2V5 IO) | 68.0 mA | 37.0 mA | 4.0 mA | 184.1 mW |
| 100BTX Traffic (GMII 2V5 IO) | 70.0 mA | 37.0 mA | 7.0 mA | 194.0 mW |
| 100BTX Idle (MII 2V5 IO) | 70.0 mA | 37.0 mA | 7.0 mA | 194.0 mW |
| 100BTX Traffic (MII 2V5 IO) | 70.0 mA | 37.0 mA | 7.0 mA | 194.0 mW |
| 10BT Idle (GMII 2V5 IO) | 18.0 mA | 20.0 mA | 2.0 mA | 76.6 mW |
| 10BT Traffic (GMII 2V5 IO) | 18.0 mA | 37.0 mA | 2.0 mA | 119.1 mW |
| 10BT Idle (MII 2V5 IO) | 18.0 mA | 21.0 mA | 2.0 mA | 79.1 mW |
| 10BT Traffic (MII 2V5 IO) | 18.0 mA | 37.0 mA | 2.0 mA | 119.1 mW |
| 10BTe Idle (GMII 2V5 IO) | 18.0 mA | 20.0 mA | 2.0 mA | 76.6 mW |
| 10BTe Traffic (GMII 2V5 IO) | 18.0 mA | 30.0 mA | 2.0 mA | 101.6 mW |
| 10BTe Idle (MII 2V5 IO) | 18.0 mA | 20.0 mA | 2.0 mA | 76.6 mW |
| 10BTe Traffic (MII 2V5 IO) | 18.0 mA | 31.0 mA | 2.0 mA | 104.1 mW |
| EDPD | 2.0 mA | 11.0 mA | 1.0 mA | 32.4 mW |
| EEE 1000BT Idle | 46.0 mA | 26.0 mA | 8.0 mA | 140.2 mW |
| EEE 100BTX Idle | 30.0 mA | 12.0 mA | 5.0 mA | 78.5 mW |
| RESET | 7.0 mA | 13.0 mA | 1.0 mA | 43.4 mW |
| SFPD | 0.0 mA | 3.0 mA | 1.0 mA | 10.0 mW |

**TABLE 6-6: TYPICAL CURRENT/POWER CONSUMPTION TRANSCEIVER (2.5V), DIGITAL I/O (1.8V)**

| Condition | 1.2V Core (DVDDL, AVDDL, AVDDL_PLL) | 2.5V Transceiver (AVDDH) | 1.8V Digital I/O (DVDDH) | Total Power |
|---|---|---|---|---|
| 1000BT Idle (GMII 1V8 IO) | 208.0 mA | 77.0 mA | 5.0 mA | 451.1 mW |
| 1000BT Traffic (GMII 1V8 IO) | 218.0 mA | 76.0 mA | 18.0 mA | 484.0 mW |
| 100BTX Idle (GMII 1V8 IO) | 70.0 mA | 37.0 mA | 2.0 mA | 180.1 mW |
| 100BTX Traffic (GMII 1V8 IO) | 70.0 mA | 37.0 mA | 4.0 mA | 183.7 mW |
| 100BTX Idle (MII 1V8 IO) | 70.0 mA | 37.0 mA | 4.0 mA | 183.7 mW |
| 100BTX Traffic (MII 1V8 IO) | 70.0 mA | 37.0 mA | 10.0 mA | 194.5 mW |
| 10BT Idle (GMII 1V8 IO) | 18.0 mA | 20.0 mA | 1.0 mA | 73.4 mW |
| 10BT Traffic (GMII 1V8 IO) | 18.0 mA | 37.0 mA | 1.0 mA | 115.9 mW |
| 10BT Idle (MII 1V8 IO) | 18.0 mA | 20.0 mA | 1.0 mA | 73.4 mW |
| 10BT Traffic (MII 1V8 IO) | 18.0 mA | 37.0 mA | 1.0 mA | 115.9 mW |
| 10BTe Idle (GMII 1V8 IO) | 18.0 mA | 20.0 mA | 1.0 mA | 73.4 mW |
| 10BTe Traffic (GMII 1V8 IO) | 18.0 mA | 30.0 mA | 1.0 mA | 98.4 mW |
| 10BTe Idle (MII 1V8 IO) | 18.0 mA | 20.0 mA | 1.0 mA | 73.4 mW |
| 10BTe Traffic (MII 1V8 IO) | 18.0 mA | 31.0 mA | 1.0 mA | 100.9 mW |
| EDPD | 2.0 mA | 6.0 mA | 0.0 mA | 17.4 mW |
| EEE 1000BT Idle | 46.0 mA | 26.0 mA | 8.0 mA | 134.6 mW |
| EEE 100BTX Idle | 30.0 mA | 13.0 mA | 4.0 mA | 75.7 mW |

© 2018-2021 Microchip Technology Inc.

**TABLE 6-6: TYPICAL CURRENT/POWER CONSUMPTION TRANSCEIVER (2.5V), DIGITAL I/O (1.8V) (CONTINUED)**

| Condition | 1.2V Core (DVDDL, AVDDL, AVDDL_PLL) | 2.5V Transceiver (AVDDH) | 1.8V Digital I/O (DVDDH) | Total Power |
|---|---|---|---|---|
| RESET | 7.0 mA | 13.0 mA | 0.0 mA | 40.9 mW |
| SFPD | 0.0 mA | 3.0 mA | 0.0 mA | 7.5 mW |

**TABLE 6-7: TYPICAL CURRENT/POWER CONSUMPTION TRANSCEIVER (3.3V), DIGITAL I/O (2.5V)**

| Condition | 1.2V Core (DVDDL, AVDDL, AVDDL_PLL) | 3.3V Transceiver (AVDDH) | 2.5V Digital I/O (DVDDH) | Total Power |
|---|---|---|---|---|
| 1000BT Idle (GMII 2V5 IO) | 210.0 mA | 77.0 mA | 15.0 mA | 543.6 mW |
| 1000BT Traffic (GMII 2V5 IO) | 218.0 mA | 76.0 mA | 46.0 mA | 627.4 mW |
| 100BTX Idle (GMII 2V5 IO) | 70.0 mA | 37.0 mA | 5.0 mA | 218.6 mW |
| 100BTX Traffic (GMII 2V5 IO) | 70.0 mA | 37.0 mA | 12.0 mA | 236.1 mW |
| 100BTX Idle (MII 2V5 IO) | 70.0 mA | 37.0 mA | 10.0 mA | 231.1 mW |
| 100BTX Traffic (MII 2V5 IO) | 70.0 mA | 37.0 mA | 13.0 mA | 238.6 mW |
| 10BT Idle (GMII 2V5 IO) | 18.0 mA | 20.0 mA | 3.0 mA | 95.1 mW |
| 10BT Traffic (GMII 2V5 IO) | 18.0 mA | 37.0 mA | 3.0 mA | 151.2 mW |
| 10BT Idle (MII 2V5 IO) | 18.0 mA | 21.0 mA | 3.0 mA | 98.4 mW |
| 10BT Traffic (MII 2V5 IO) | 18.0 mA | 37.0 mA | 3.0 mA | 151.2 mW |
| 10BTe Idle (GMII 2V5 IO) | 18.0 mA | 20.0 mA | 3.0 mA | 95.1 mW |
| 10BTe Traffic (GMII 2V5 IO) | 18.0 mA | 30.0 mA | 3.0 mA | 128.1 mW |
| 10BTe Idle (MII 2V5 IO) | 18.0 mA | 20.0 mA | 2.0 mA | 92.6 mW |
| 10BTe Traffic (MII 2V5 IO) | 18.0 mA | 31.0 mA | 3.0 mA | 131.4 mW |
| EDPD | 2.0 mA | 11.0 mA | 1.0 mA | 41.2 mW |
| EEE 1000BT Idle | 46.0 mA | 26.0 mA | 22.0 mA | 196.0 mW |
| EEE 100BTX Idle | 30.0 mA | 12.0 mA | 8.0 mA | 95.6 mW |
| RESET | 7.0 mA | 13.0 mA | 1.0 mA | 53.8 mW |
| SFPD | 0.0 mA | 3.0 mA | 1.0 mA | 12.4 mW |

## 6.5 DC Specifications

**TABLE 6-8: NON-VARIABLE I/O DC ELECTRICAL CHARACTERISTICS**

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|---|
| **ICLK Type Input Buffer** | | | | | | Note 6-1 |
| Low Input Level | $V_{IL}$ | | | 0.5 | V | |
| High Input Level | $V_{IH}$ | 2.0 | | | V | |
| Input Leakage | $I_{IH}$ | -10 | | 10 | µA | |

**Note 6-1** XI can optionally be driven from a 25 MHz single-ended clock oscillator to which these specifications apply.


© 2018-2021 Microchip Technology Inc.

**TABLE 6-9: VARIABLE I/O DC ELECTRICAL CHARACTERISTICS DVDDH = 3.3/2.5/1.8V**

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|---|
| **VI Type Input Buffer** | | | | | | |
| Low Input Level | $V_{IL}$ | | | 0.9/0.9/0.6 | V | |
| High Input Level | $V_{IH}$ | 2.1/1.7/1.3 | | | V | |
| Input Leakage ($V_{IN}$ = VSS or DVDDH) | $I_{IH}$ | -10 | | 10 | µA | Note 6-2 |
| Input Capacitance (generic guess) | $C_{IN}$ | | | 3 | pF | |
| Effective Pull-Up Resistance ($V_{IN}$ = VSS) | $R_{PU}$ | | 44/59/96 | | KΩ | |
| Effective Pull-Down Resistance ($V_{IN}$ = DVDDH) | $R_{PD}$ | | 47/58/86 | | KΩ | |
| **VIS Type Input Buffer** | | | | | | |
| Low Input Level | $V_{IL}$ | | | 0.9/0.9/0.6 | V | |
| High Input Level | $V_{IH}$ | 2.1/1.7/1.3 | | | V | |
| Schmitt Falling Trip Point | $V_{T-}$ | 1.0/0.8/0.6 | 1.2/1.0/0.7 | 1.5/1.1/0.8 | V | |
| Schmitt Rising Trip Point | $V_{T+}$ | 1.5/1.2/0.9 | 1.7/1.4/1.1 | 1.9/1.6/1.3 | V | |
| Schmitt Trigger Hysteresis ($V_{IHT}$ - $V_{ILT}$) | $V_{HYS}$ | 0.4/0.3/0.3 | 0.5/0.4/0.4 | 0.6/0.5/0.5 | V | |
| Input Leakage ($V_{IN}$ = VSS or DVDDH) | $I_{IH}$ | -10 | | 10 | µA | Note 6-2 |
| Input Capacitance (generic guess) | $C_{IN}$ | | | 3 | pF | |
| Effective Pull-Up Resistance ($V_{IN}$ = VSS) | $R_{PU}$ | | 44/59/96 | | KΩ | |
| Effective Pull-Down Resistance ($V_{IN}$ = DVDDH) | $R_{PD}$ | | 47/58/86 | | KΩ | |
| **VO8 Type Buffer** | | | | | | |
| Low Output Level | $V_{OL}$ | | | 0.4/0.4/0.2 | V | $I_{OL}$ = -8/-8/-6 mA<br>$I_{OH}$ = -8/-8/-6 mA |
| High Output Level | $V_{OH}$ | 2.4/1.9/1.5 | | | V | Note 6-2 |
| Output Tri-State Leakage | $I_{OZ}$ | -10 | | 10 | µA | |

**TABLE 6-9: VARIABLE I/O DC ELECTRICAL CHARACTERISTICS DVDDH = 3.3/2.5/1.8V**

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|---|
| **VOD8 Type Buffer** | | | | | | |
| Low Output Level | $V_{OL}$ | | | 0.4/0.4/0.2 | V | $I_{OL}$ = -8/-8/-6 mA Note 6-2 |
| Output Tri-State Leakage | $I_{OZ}$ | -10 | | 10 | µA | |
| **VO24 Type Buffer** | | | | | | |
| Low Output Level | $V_{OL}$ | | | 0.4/0.4/0.2 | V | $I_{OL}$ = -24/-24/-14 mA |
| High Output Level | $V_{OH}$ | 2.4/1.9/1.5 | | | V | $I_{OH}$ = 24/-24/-14 mA |
| Output Tri-State Leakage | $I_{OZ}$ | -10 | | 10 | µA | Note 6-2 |

**Note 6-2** This specification applies to all inputs without pull-ups or pull-downs and three-stated bi-directional pins.

**TABLE 6-10: 1000BASE-T TRANSCEIVER CHARACTERISTICS**

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|---|
| Peak Differential Output Voltage<br>IEEE 802.3 clause 40.6.1.2.1 | $V_{OP}$ | 670 | | 820 | mV | Note 6-3 |
| Signal Amplitude Symmetry<br>IEEE 802.3 clause 40.6.1.2.1 | $V_{SS}$ | | | 1 | % | Note 6-3 |
| Signal Scaling<br>IEEE 802.3 clause 40.6.1.2.1 | $V_{SC}$ | | | 2 | % | Note 6-4 |
| Output Droop<br>IEEE 802.3 clause 40.6.1.2.2 | $V_{OD}$ | 73.1 | | | % | Note 6-3 |
| Transmission Distortion<br>IEEE 802.3 clause 40.6.1.2.4 | | | | 10 | mV | Note 6-5 |

**Note 6-3** IEEE 802.ab Test Mode 1

**Note 6-4** From 1/2 of average $V_{OP}$, Test Mode 1

**Note 6-5** IEEE 802.ab distortion processing


© 2018-2021 Microchip Technology Inc.

**TABLE 6-11: 100BASE-TX TRANSCEIVER CHARACTERISTICS**

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|---|
| Peak Differential Output Voltage<br>ANSI X3.263 clause 9.1.2.2 | $V_{OUT}$ | ±0.95 | | ±1.05 | V | Note 6-6 |
| Signal Amplitude Symmetry<br>ANSI X3.263 clause 9.1.4 | $V_{SS}$ | | | 2 | % | Note 6-6 |
| Signal Rise and Fall Time<br>ANSI X3.263 clause 9.1.6 | $T_{RF}$ | 3 | | 5 | ns | Note 6-6 |
| Rise and Fall Symmetry<br>ANSI X3.263 clause 9.1.6 | $T_{RFS}$ | 0 | | 0.5 | ns | Note 6-6 |
| Duty Cycle Distortion<br>ANSI X3.263 clause 9.1.8 | $D_{CD}$ | | | ±0.25 | ns | Note 6-7 |
| Overshoot and Undershoot<br>ANSI X3.263 clause 9.1.3 | $V_{OS}$ | | | 5 | % | |
| Output Jitter<br>ANSI X3.263 clause 9.1.9 | | | 0.7 | 1.4 | ns | Note 6-8 |
| Reference Voltage of ISET<br>(using 6.04kΩ - 1% resistor) | $V_{SET}$ | | 1.20 | | V | |

**Note 6-6** Measured at line side of transformer, line replaced by 100Ω (+/- 1%) resistor.

**Note 6-7** Offset from 16ns pulse width at 50% of pulse peak.

**Note 6-8** Peak to Peak, measured differentially.

**TABLE 6-12: 10BASE-T/10BASE-Te TRANSCEIVER CHARACTERISTICS**

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|---|
| Transmitter Peak Differential Output Voltage<br>IEEE 802.3 clause 14.3.1.2.1 | $V_{OUT}$<br>10BASE-T | 2.2 | 2.5 | 2.8 | V | Note 6-9 |
| | $V_{OUT}$<br>10BASE-Te | 1.54 | | 1.96 | V | Note 6-9 |
| Output Jitter<br>IEEE 802.3 clause 14.3.1.2.3 | | | 1.8 | 3.5 | ns | Note 6-10 |
| Signal Rise and Fall Time | $T_{RF}$ | | 25 | | ns | |
| Receiver Differential Squelch Threshold<br>IEEE 802.3 clause 14.3.1.3.2 | $V_{DS}$ | 300 | 400 | | mV | Note 6-11 |

**Note 6-9** Measured with 100Ω resistive load.

**Note 6-10** Measured differentially following the twisted-pair model with a 100Ω resistive load.

**Note 6-11** 5MHz square wave.

© 2018-2021 Microchip Technology Inc.

**TABLE 6-13: LDO CONTROLLER**

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|---|
| Output drive range for LDO_O to gate input of P-channel MOSFET | $V_{LDO_O}$ | 1.2 | | 3.11 | V | AVDDH = 3.3V for MOSFET source voltage |
| | | 1.2 | | 2.0 | V | AVDDH = 2.5V for MOSFET source voltage |
| Output of P-channel MOSFET | | 1.23 | 1.25 | 1.32 | V | |

**TABLE 6-14: POR THRESHOLDS**

| POR | Conditions | Rising threshold volts | | | Falling threshold volts | | | Hysteresis millivolts | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | min | typ | max | min | typ | max | min | typ | max |
| 1.2V Ethernet PHY Analog (AVDDL) | AVDDH = 2.5V | 0.73 | 0.76 | 0.80 | 0.64 | 0.68 | 0.80 | 0 | 80 | 114 |
| | AVDDH = 3.3V | 0.73 | 0.76 | 0.82 | 0.63 | 0.70 | 0.82 | 0 | 65 | 120 |
| 2.5V / 3.3V Ethernet PHY Analog (AVDDH) | | 1.9 | 2.1 | 2.2 | 1.9 | 2.0 | 2.1 | 65 | 110 | 145 |
| 3.3V / 2.5V / 1.8V Variable I/O (DVDDH) | | 1.40 | 1.48 | 1.57 | 1.35 | 1.42 | 1.51 | 45 | 58 | 73 |


© 2018-2021 Microchip Technology Inc.

## 6.6 AC Specifications


This section details the various AC timing specifications of the device.

| | |
|---|---|
| **Note:** | The GMII/MII timing adheres to or exceeds the IEEE 802.3 specification. Refer to the IEEE 802.3 specification for additional GMII/MII timing information. |

### 6.6.1 EQUIVALENT TEST LOAD

Output timing specifications assume a 5pF equivalent test load, unless otherwise noted, as illustrated in Figure 6-1.


**FIGURE 6-1: OUTPUT EQUIVALENT TEST LOAD**

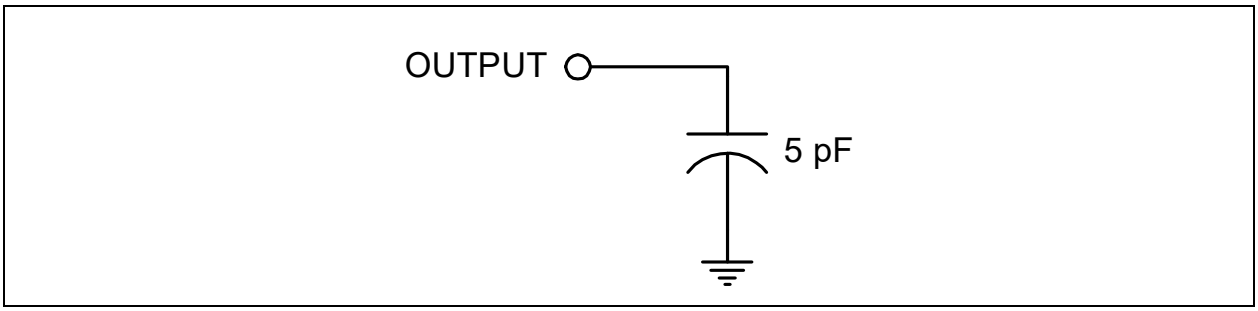

### 6.6.2 POWER SEQUENCE TIMING

These diagrams illustrates the device power sequencing requirements.

**FIGURE 6-2: POWER SEQUENCE TIMING INTERNAL REGULATORS**

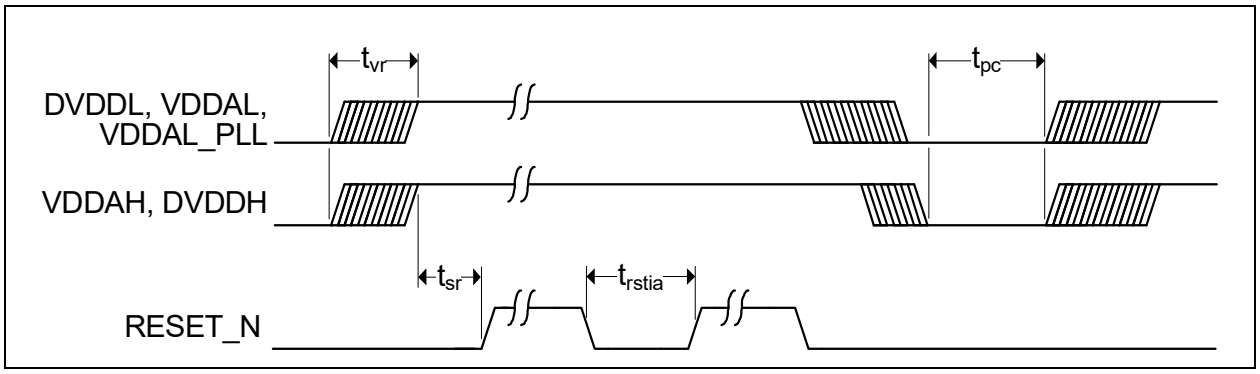


The recommended power-up sequence is to have the transceiver (AVDDH) and digital I/O (DVDDH) voltages power up before the 1.2V core (DVDDL, AVDDL, AVDDL_PLL) voltage. If the 1.2V core must power up first, the maximum lead time for the 1.2V core voltage with respect to the transceiver and digital I/O voltages should be 200 µs.

There is no power sequence requirement between transceiver (AVDDH) and digital I/O (DVDDH) power rails.

The power-up waveforms must be monotonic for all supply voltages to the device.

RESET_N must be held asserted following stable voltages for the minimum period specified and if re-asserted, for the minimum period specified.

The recommended power-down sequence is to have the 1.2V core voltage power-down before powering down the transceiver and digital I/O voltages.

Before the next power-up cycle, all supply voltages to the device should reach less than 0.4V and there should be a minimum wait time of 150 ms from power-off to power-on.

**TABLE 6-15: POWER SEQUENCING TIMING VALUES**

| Symbol | Description | Min | Typ | Max | Units |
|---|---|---|---|---|---|
| $t_{vr}$ | Supply voltages rise time (must be monotonic) | | | 200 | µs |
| $t_{sr}$ | Stable supply voltages to de-assertion of reset | 10 | | | ms |
| $t_{rstia}$ | RESET_N input assertion time | 1 | | | µs |
| $t_{pc}$ | Supply voltages cycle off-to-on time | 150 | | | ms |


© 2018-2021 Microchip Technology Inc.

### 6.6.3 RESET PIN CONFIGURATION STRAP TIMING

Figure 6-3 illustrates the RESET_N timing requirements and its relation to the configuration straps. RESET_N must be asserted for the minimum period specified.

**FIGURE 6-3: RESET_N CONFIGURATION STRAP TIMING**

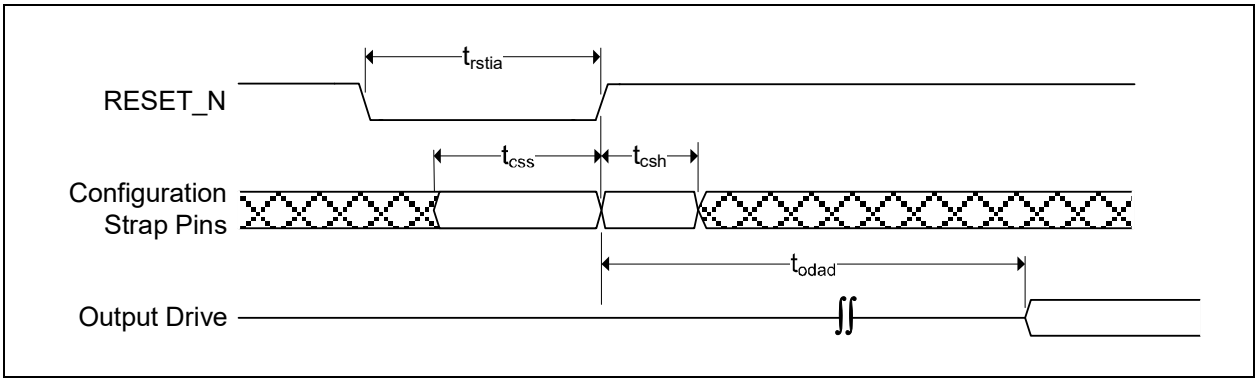



**TABLE 6-16: RESET_N CONFIGURATION STRAP TIMING**

| Symbol | Description | Min | Typ | Max | Units |
|---|---|---|---|---|---|
| $t_{rstia}$ | RESET_N input assertion time | 1 | | | µs |
| $t_{css}$ | Configuration strap setup before RESET_N de-assertion | 5 | | | ns |
| $t_{csh}$ | Configuration strap hold after RESET_N de-assertion | 5 | | | ns |
| $t_{odad}$ | Output drive after RESET_N de-assertion | 1 | | | us |

### 6.6.4 GMII TIMING (1000BASE-T)

This section specifies the GMII interface transmit and receive timing.

**Note:**

- All GMII timing specifications assume a point-to-point test circuit as defined in Section 35.4.2.2 of the IEEE 802.3-2005 specification.
- The below timing parameters assume default values for the following registers:
  Clock Invert and Control Signal Pad Skew Register
  Clock Pad Skew Register

**FIGURE 6-4: GMII TRANSMIT TIMING**

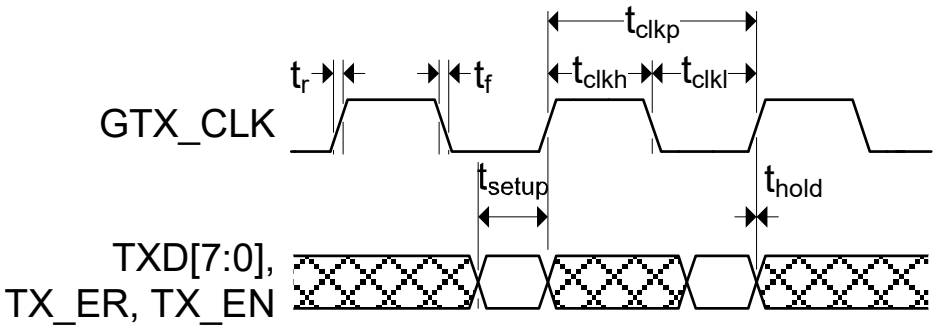



**TABLE 6-17: GMII TRANSMIT TIMING VALUES**

| Symbol | Description | Min | Max | Units | Notes |
|---|---|---|---|---|---|
| $f_{gtxclk}$ | GTX_CLK Frequency | 125 - 100ppm | 125 + 100ppm | MHz | |
| $t_{clkp}$ | GTX_CLK period | 7.5 | 8.5 | ns | |
| $t_{clkh}$ | GTX_CLK high time | 2.5 | | ns | |
| $t_{clkl}$ | GTX_CLK low time | 2.5 | | ns | |
| $t_{setup}$ | TXD[7:0], TX_EN, TX_ER setup to rising edge of GTX_CLK | 2.0 | | ns | |
| $t_{hold}$ | TXD[7:0], TX_EN, TX_ER hold time from rising edge of GTX_CLK | 0 | | ns | |
| $t_r$ | GTX_CLK rise time | | 1 | ns | Note 6-12 |
| $t_f$ | GTX_CLK fall time | | 1 | ns | Note 6-12 |

**Note 6-12** $t_r$ and $t_f$ are measured from $V_{IL_AC(Max)}$=0.7V to $V_{IH_AC(Min)}$=1.9V.


© 2018-2021 Microchip Technology Inc.

**FIGURE 6-5: GMII RECEIVE TIMING**

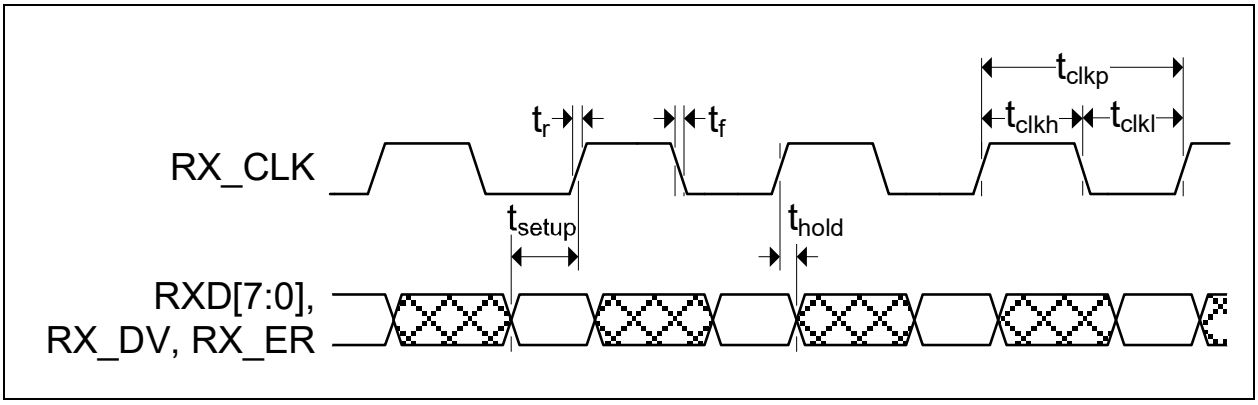



**TABLE 6-18: GMII RECEIVE TIMING VALUES**

| Symbol | Description | Min | Max | Units | Notes |
|---|---|---|---|---|---|
| $t_{clkp}$ | RX_CLK period | 7.5 | | ns | |
| $t_{clkh}$ | RX_CLK high time | 2.5 | | ns | |
| $t_{clkl}$ | RX_CLK low time | 2.5 | | ns | |
| $t_{setup}$ | RXD[7:0], RX_DV, RX_ER setup time (provided by PHY) to rising edge of RX_CLK | 3.0 | | ns | |
| $t_{hold}$ | RXD[7:0], RX_DV, RX_ER hold time (provided by PHY) after rising edge of RX_CLK | 1.0 | | ns | |
| $t_r$ | RX_CLK rise time | | 1 | ns | Note 6-13 |
| $t_f$ | RX_CLK fall time | | 1 | ns | Note 6-13 |

**Note 6-13** $t_r$ and $t_f$ are measured from $V_{IL_AC(Max)}$=0.7V to $V_{IH_AC(Min)}$=1.9V.

### 6.6.5 MII TIMING (100BASE-TX, 10BASE-T)

This section specifies the MII interface transmit and receive timing.

| | |
|---|---|
| **Note:** | The below timing parameters assume default values for the following registers:<br>Clock Invert and Control Signal Pad Skew Register<br>Clock Pad Skew Register |

**FIGURE 6-6: MII TRANSMIT TIMING**

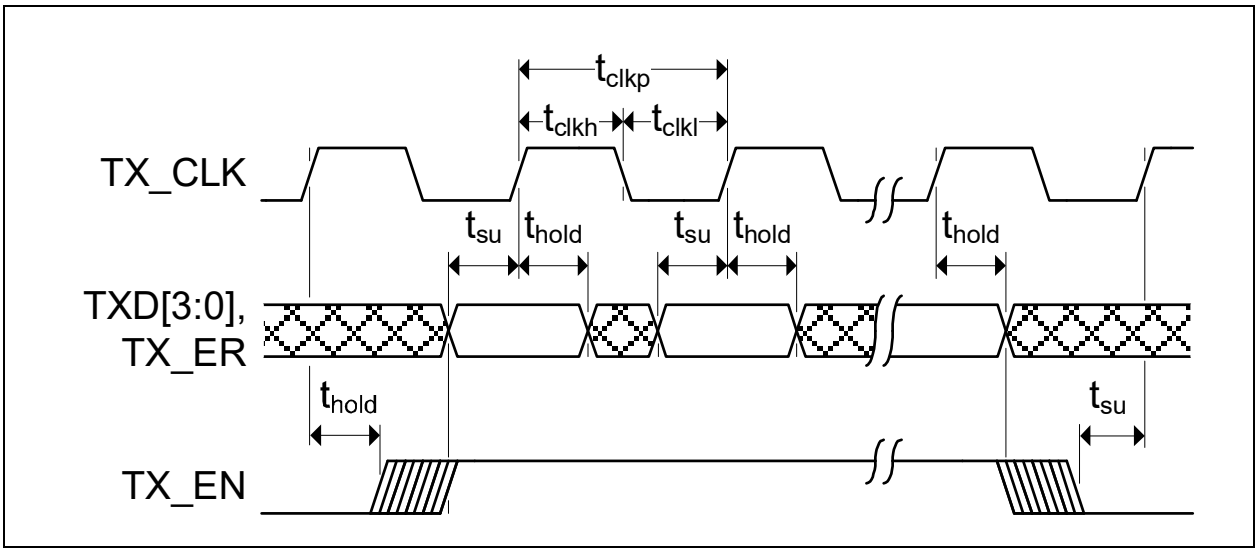



**TABLE 6-19: MII TRANSMIT TIMING VALUES**

| Symbol | Description | Min | Max | Units | Notes |
|---|---|---|---|---|---|
| $t_{clkp}$ | TX_CLK period | Note 6-14 | | ns | |
| $t_{clkh}$ | TX_CLK high time | $t_{clkp}$*0.35 | $t_{clkp}$*0.65 | ns | |
| $t_{clkl}$ | TX_CLK low time | $t_{clkp}$*0.35 | $t_{clkp}$*0.65 | ns | |
| $t_{su}$ | TXD[3:0], TX_EN, TX_ER setup time to rising edge of TX_CLK | 13 | | ns | |
| $t_{hold}$ | TXD[3:0], TX_EN, TX_ER output hold from rising edge of TX_CLK | 0 | | ns | |

**Note 6-14** 40ns for 100BASE-TX operation, 400ns for 10BASE-T operation.


© 2018-2021 Microchip Technology Inc.

**FIGURE 6-7: MII RECEIVE TIMING**

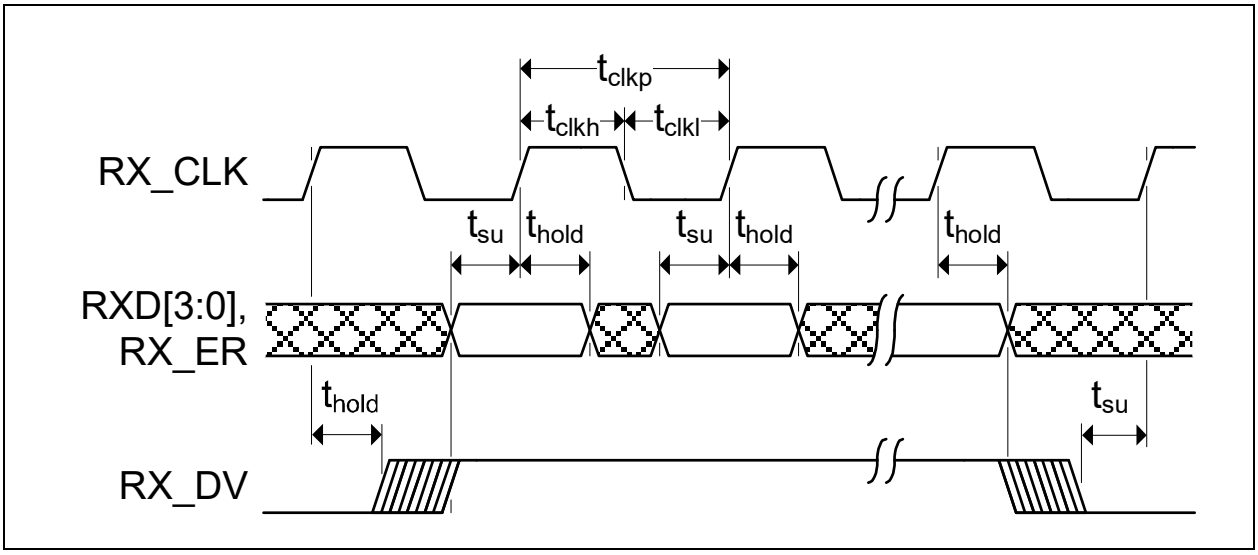



**TABLE 6-20: MII RECEIVE TIMING VALUES**

| Symbol | Description | Min | Max | Units | Notes |
|---|---|---|---|---|---|
| $t_{clkp}$ | RX_CLK period | Note 6-15 | | ns | |
| $t_{clkh}$ | RX_CLK high time | $t_{clkp}$*0.35 | $t_{clkp}$*0.65 | ns | |
| $t_{clkl}$ | RX_CLK low time | $t_{clkp}$*0.35 | $t_{clkp}$*0.65 | ns | |
| $t_{su}$ | RXD[3:0], RX_DV, RX_ER setup time (provided by PHY) to rising edge of RX_CLK | 12 | | ns | |
| $t_{hold}$ | RXD[3:0], RX_DV, RX_ER hold time (provided by PHY) after rising edge of RX_CLK | 12 | | ns | |

**Note 6-15** 40ns for 100BASE-TX operation, 400ns for 10BASE-T operation.

### 6.6.6 AUTO-NEGOTIATION FAST LINK PULSE (FLP) TIMING

**FIGURE 6-8: AUTO-NEGOTIATION FAST LINK PULSE (FLP) TIMING**

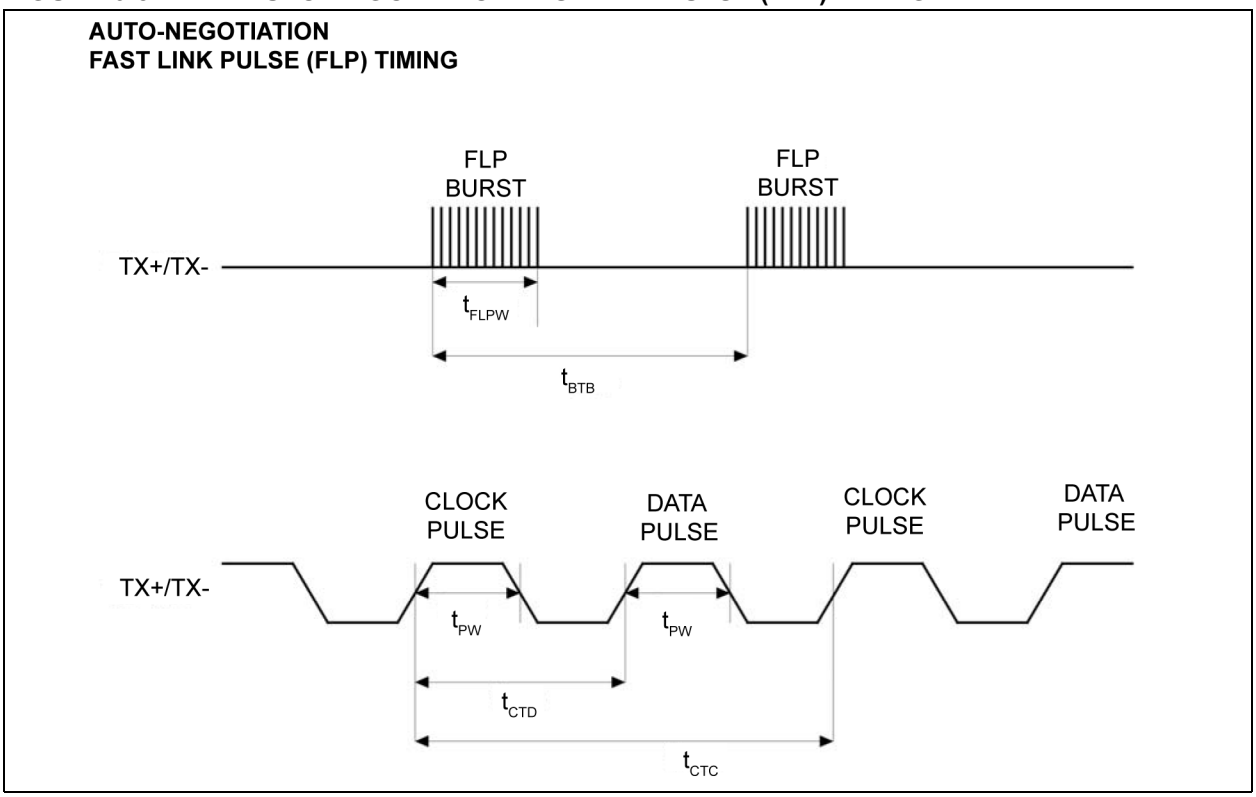



**TABLE 6-21: AUTO-NEGOTIATION FAST LINK PULSE (FLP) TIMING PARAMETERS**

| Symbol | Description | Min | Typ | Max | Units |
|---|---|---|---|---|---|
| $t_{BTB}$ | FLP burst to FLP burst | 8 | 16 | 24 | ms |
| $t_{FLPW}$ | FLP burst width | | 2 | | ms |
| $t_{PW}$ | Clock/Data pulse width | | 100 | | ns |
| $t_{CTD}$ | Clock pulse to data pulse | 55.5 | 64 | 69.5 | µs |
| $t_{CTC}$ | Clock pulse to clock pulse | 111 | 128 | 139 | µs |
| | Number of clock/data pulses per FLP burst | 17 | | 33 | |


© 2018-2021 Microchip Technology Inc.

### 6.6.7 MDC/MDIO TIMING

This section specifies the MDC/MDIO timing of the device.

**FIGURE 6-9: MDC/MDIO TIMING**

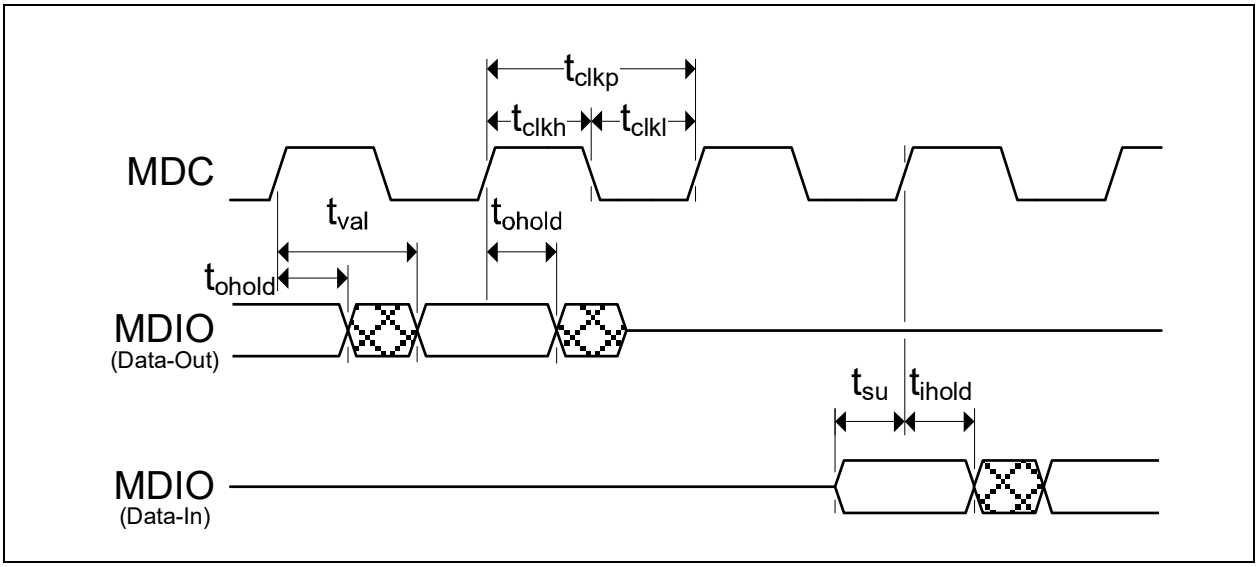



**TABLE 6-22: MDC/MDIO TIMING VALUES**

| Symbol | Description | Min | Typ | Max | Units |
|---|---|---|---|---|---|
| $t_{clkp}$ | MDC period | 120<br>Note 6-16 | 400 | Note 6-17 | ns |
| $t_{clkh}$ | MDC high time | 40 | | | ns |
| $t_{clkl}$ | MDC low time | 40 | | | ns |
| $t_{val}$ | MDIO (read from PHY) output valid from rising MDIO of MDC | | | 80 | ns |
| $t_{ohold}$ | MDIO (read from PHY) output hold from rising edge of MDC | 0 | | | ns |
| $t_{su}$ | MDIO (write to PHY) input setup time to rising edge of MDC | 8 | | | ns |
| $t_{ihold}$ | MDIO (write to PHY) input hold time after rising edge of MDC | 8 | | | ns |

**Note 6-16** Test condition for 8.33 MHz (120 ns) is for one device PHY on the MDIO line with a 1.0 kΩ pull-up to the DVDDH supply rail.

**Note 6-17** The device can operate with MDC clock frequencies generated from bit banging with GPIO pin in the 10s/100s of Hertz.

## 6.7 Clock Circuit

The device can accept either a 25MHz crystal (preferred) or a 25 MHz single-ended clock oscillator (+/- 50ppm) input. If the single-ended clock oscillator method is implemented, XO should be left unconnected and XI should be driven with either a nominal 0-2.5V or a nominal 0-3.3V clock signal, dependent on the supply level of AVDDH (2.5V and 3.3V, respectively). The input clock duty cycle is 40% minimum, 50% typical and 60% maximum.

It is recommended that a crystal utilizing matching parallel load capacitors be used for the crystal input/output signals (XI/XO). See Table 6-23 for the recommended crystal specifications.

**TABLE 6-23: CRYSTAL SPECIFICATIONS**

| Parameter | Symbol | Min | Nom | Max | Units | Notes |
|---|---|---|---|---|---|---|
| Crystal Cut | AT, typ | | | | | |
| Crystal Oscillation Mode | Fundamental Mode | | | | | |
| Crystal Calibration Mode | Parallel Resonant Mode | | | | | |
| Frequency | $F_{fund}$ | - | 25.000 | - | MHz | |
| Frequency Tolerance @ 25°C | $F_{tol}$ | - | - | +/-50 | PPM | Note 6-18 |
| Frequency Stability Over Temp | $F_{temp}$ | - | - | +/-50 | PPM | Note 6-18 |
| Frequency Deviation Over Time | $F_{age}$ | - | +/-3 to 5 | - | PPM | Note 6-19 |
| Total Allowable PPM Budget | | - | - | +/-50 | PPM | Note 6-20 |
| Shunt Capacitance | $C_O$ | - | - | 6 | pF | |
| Load Capacitance | $C_L$ | - | - | 25 | pF | |
| Motional Inductance | LM | | | 10 | mH | |
| Drive Level | $P_W$ | - | - | 100 | µW | |
| Equivalent Series Resistance | $R_1$ | - | - | 50 | Ohm | |
| Operating Temperature Range | | Note 6-21 | - | Note 6-22 | °C | |
| XI Pin Capacitance | | - | 2 typ | - | pF | Note 6-23 |
| XO Pin Capacitance | | - | 2 typ | - | pF | Note 6-23 |

**Note 6-18** The maximum allowable values for Frequency Tolerance and Frequency Stability are application dependent. Since any particular application must meet the IEEE +/-50 PPM Total PPM Budget, the combination of these two values must be approximately +/-45 PPM (allowing for aging).

**Note 6-19** Frequency Deviation Over Time is also referred to as Aging.

**Note 6-20** The total deviation for the Transmitter Clock Frequency is specified by IEEE 802.3u as +/- 50 PPM.

**Note 6-21** 0°C for commercial version, -40°C for industrial.

**Note 6-22** +70°C for commercial version, +85°C for industrial.

**Note 6-23** This number includes the pad, the bond wire and the lead frame. PCB capacitance is not included in this value. The XO/XI pin and PCB capacitance values are required to accurately calculate the value of the two external load capacitors. These two external load capacitors determine the accuracy of the 25.000 MHz frequency.


© 2018-2021 Microchip Technology Inc.

## 6.8 Reset Circuit

The following are some reset circuit suggestions.

Figure 6-10 illustrates the reset circuit for powering up the KSZ9131MNX if reset is triggered by the power supply.

**FIGURE 6-10: RESET CIRCUIT IF TRIGGERED BY THE POWER SUPPLY**

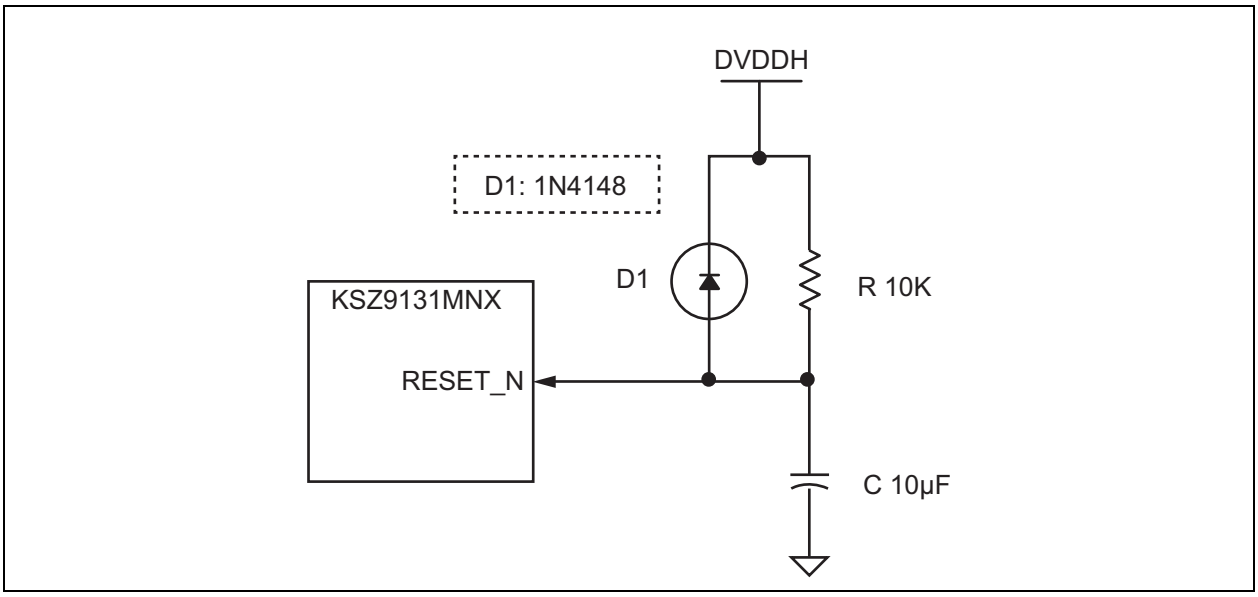



Figure 6-11 illustrates the reset circuit for applications where reset is driven by another device (for example, the CPU or an FPGA). At power-on-reset, R, C, and D1 provide the monotonic rise time to reset the KSZ9131MNX device. The RST_OUT_N from the CPU/FPGA provides the warm reset after power-up.

The KSZ9131MNX and CPU/FPGA references the same digital I/O voltage (DVDDH).

**FIGURE 6-11: RECOMMENDED RESET CIRCUIT FOR CPU/FPGA RESET OUTPUT**


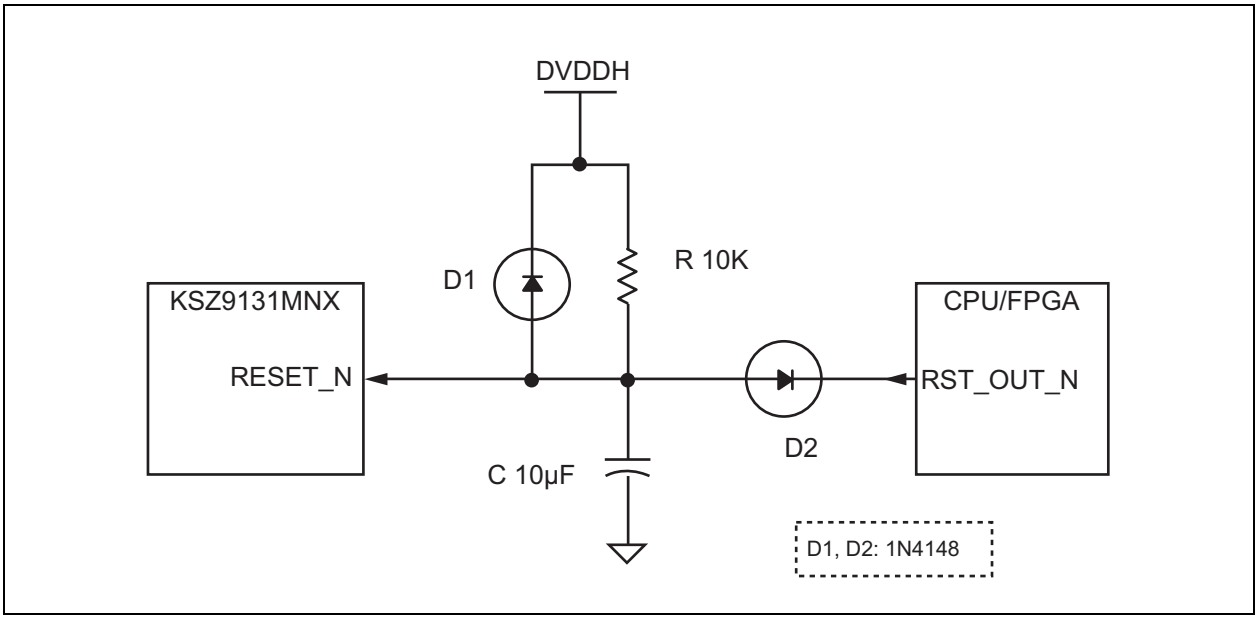


Figure 6-12 illustrates the reset circuit with an MIC826 voltage supervisor driving the KSZ9131MNX reset input.

**FIGURE 6-12: RESET CIRCUIT WITH MIC826 VOLTAGE SUPERVISOR**



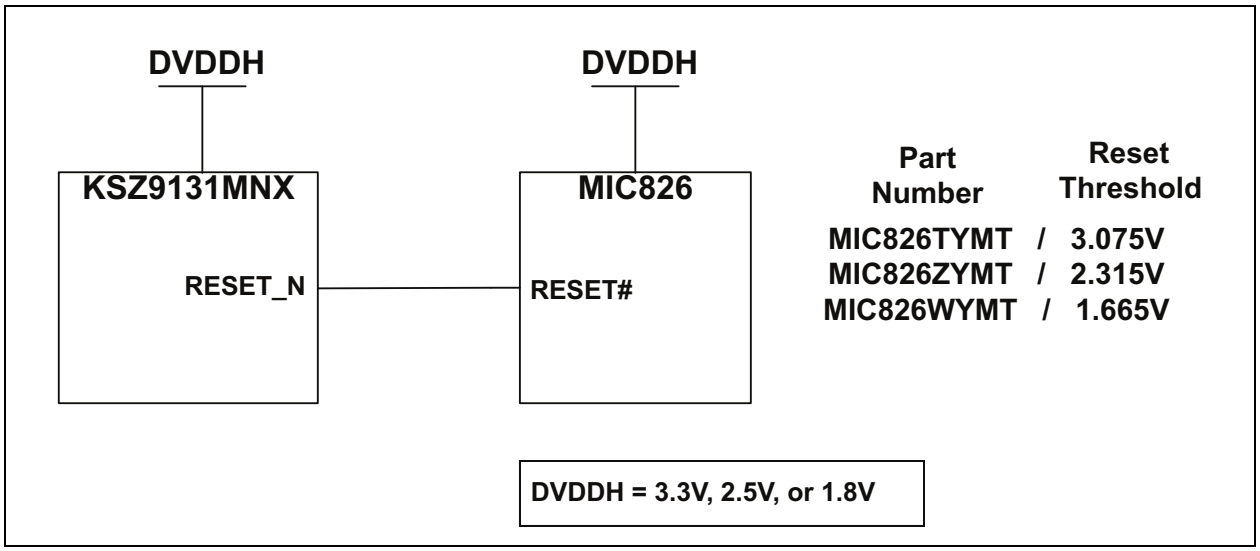


© 2018-2021 Microchip Technology Inc.

## 6.9 Reference Circuits — LED Strap-In Pins

The pull-up and pull-down reference circuits for the LED2/PHYAD1 and LED1/PHYAD0 strapping pins are shown in Figure 6-13 for 3.3V and 2.5V DVDDH.

**FIGURE 6-13: REFERENCE CIRCUITS FOR LED STRAPPING PINS**

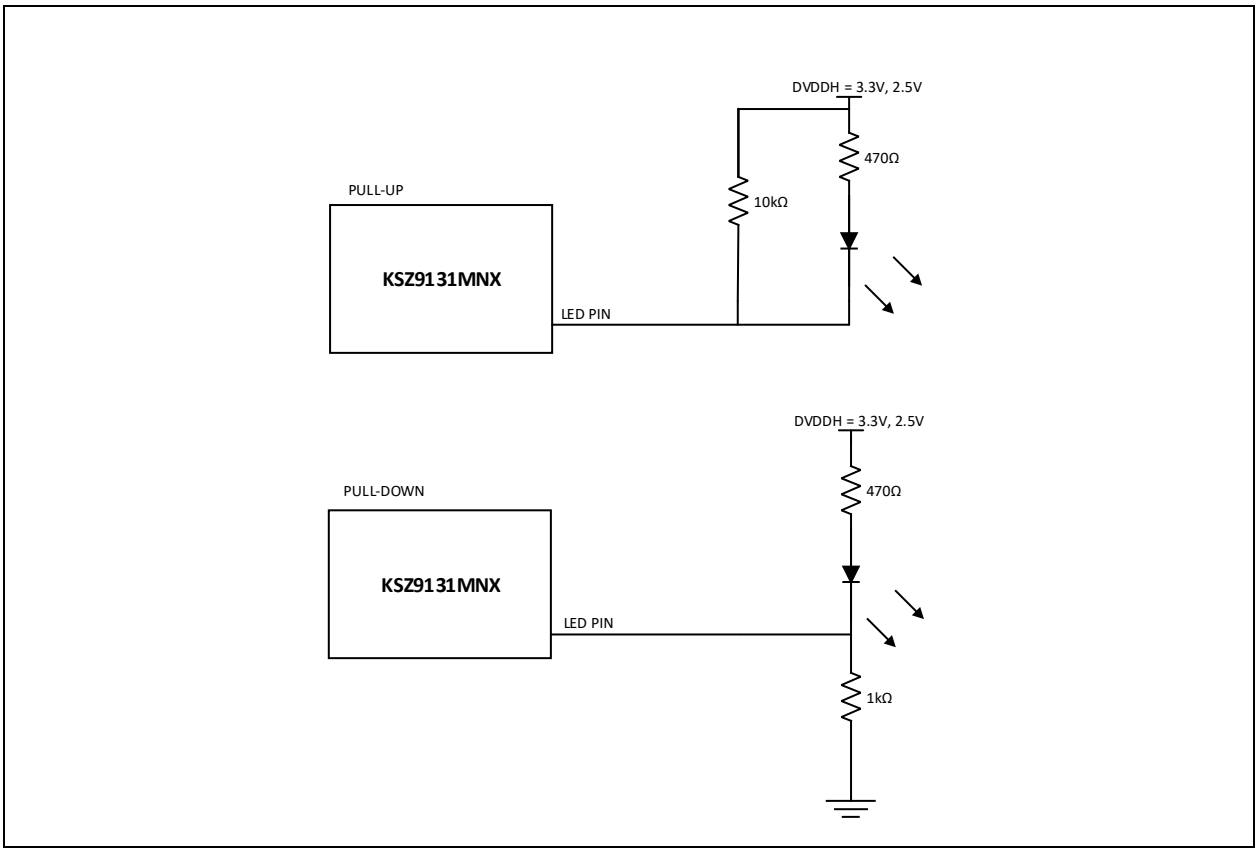


For 1.8V DVDDH, LED indication support requires voltage level shifters between LED[2:1] pins and LED indicator diodes to ensure the multiplexed PHYAD[1:0] strapping pins are latched in high/low correctly. If LED indicator diodes are not implemented, the PHYAD[1:0] strapping pins just need 10 kΩ pull-up to 1.8V DVDDH for a value of 1, and 1.0 kΩ pull-down to ground for a value of 0.

© 2018-2021 Microchip Technology Inc.

## 6.10 On-Chip LDO Controller - MOSFET Selection

If the optional LDO controller is used to generate 1.2V for the core voltage, the selected MOSFET should exceed the following minimum requirements:

- P-channel
- 500 mA (continuous current)
- 3.3V or 2.5V (source – input voltage)
- 1.2V (drain – output voltage)
- $V_{GS}$ in the range of:
  - (–1.2V to –1.5V) @ 500 mA for 3.3V source voltage
  - (–1.0V to –1.1V) @ 500 mA for 2.5V source voltage

The $V_{GS}$ for the MOSFET needs to be operating in the constant current saturated region, and not towards the $V_{GS(th)}$, the threshold voltage for the cut-off region of the MOSFET.

## 6.11 Magnetic - Connection and Selection


A 1:1 isolation transformer is required at the line interface. Use one with integrated common-mode chokes for designs exceeding FCC requirements. An optional auto-transformer stage following the chokes provides additional common-mode noise and signal attenuation.

The KSZ9131MNX design incorporates voltage-mode transmit drivers and on-chip terminations.

With the voltage-mode implementation, the transmit drivers supply the common-mode voltages to the four differential pairs. Therefore, the four transformer center tap pins on the KSZ9131MNX side should not be connected to any power supply source on the board; rather, the center tap pins should be separated from one another and connected through separate 0.1 µF common-mode capacitors to ground. Separation is required because the common-mode voltage could be different between the four differential pairs, depending on the connected speed mode.

Figure 6-14 shows the typical Gigabit magnetic interface circuit for the KSZ9131MNX.

**FIGURE 6-14: TYPICAL GIGABIT MAGNETIC INTERFACE CIRCUIT**

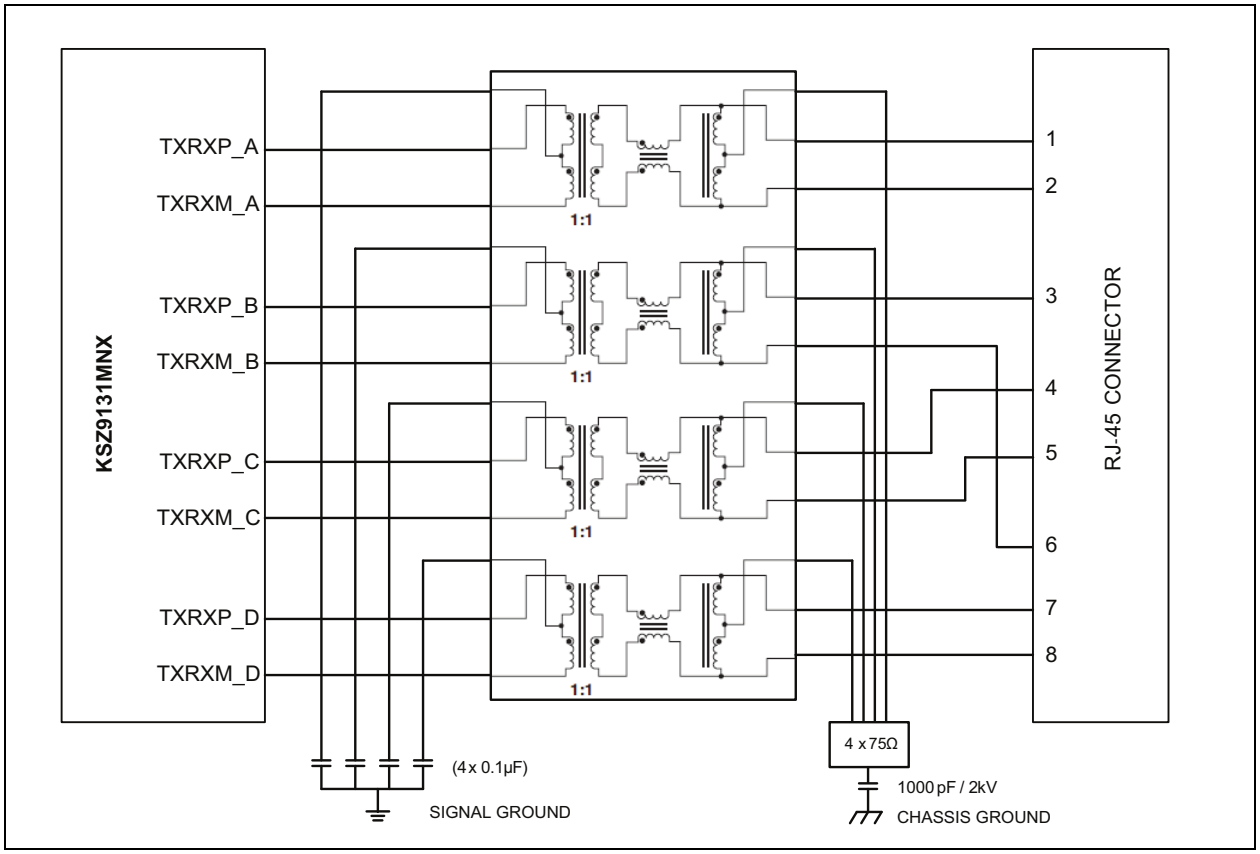



© 2018-2021 Microchip Technology Inc.

Table 6-24 lists recommended magnetic characteristics.

**TABLE 6-24: MAGNETICS SELECTION CRITERIA**

| Parameter | Value | Test Conditions |
|---|---|---|
| Turns Ratio | 1 CT : 1 CT | — |
| Open-Circuit Inductance (min.) | 350 µH | 100 mV, 100 kHz, 8 mA |
| Insertion Loss (max.) | 1.0 dB | 0 MHz to 100 MHz |
| HIPOT (min.) | 1500 $V_{RMS}$ | — |

Table 6-25 is a list of compatible single-port magnetics with separated transformer center tap pins on the G-PHY chip side that can be used with the KSZ9131MNX.

**TABLE 6-25: COMPATIBLE SINGLE-PORT 10/100/1000 MAGNETICS**


| Manufacturer | Part Number | Auto-Transformer | Temperature Range | Magnetic + RJ-45 |
|---|---|---|---|---|
| Bel Fuse | 0826-1G1T-23-F | Yes | 0°C to 70°C | Yes |
| HALO | TG1G-E001NZRL | No | –40°C to 85°C | No |
| HALO | TG1G-S001NZRL | No | 0°C to 70°C | No |
| HALO | TG1G-S002NZRL | Yes | 0°C to 70°C | No |
| Pulse | H5007NL | Yes | 0°C to 70°C | No |
| Pulse | H5062NL | Yes | 0°C to 70°C | No |
| Pulse | HX5008NL | Yes | –40°C to 85°C | No |
| Pulse | JK0654219NL | Yes | 0°C to 70°C | Yes |
| Pulse | JK0-0136NL | No | 0°C to 70°C | Yes |
| TDK | TLA-7T101LF | No | 0°C to 70°C | No |
| Wurth/Midcom | 000-7093-37R-LF1 | Yes | 0°C to 70°C | No |

© 2018-2021 Microchip Technology Inc.

## 7.0 PACKAGE OUTLINE

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

**FIGURE 7-1: 64-LEAD QFN 8 MM X 8 MM PACKAGE WITH 6.5 MM X 6.5 MM EXPOSED PAD AREA**

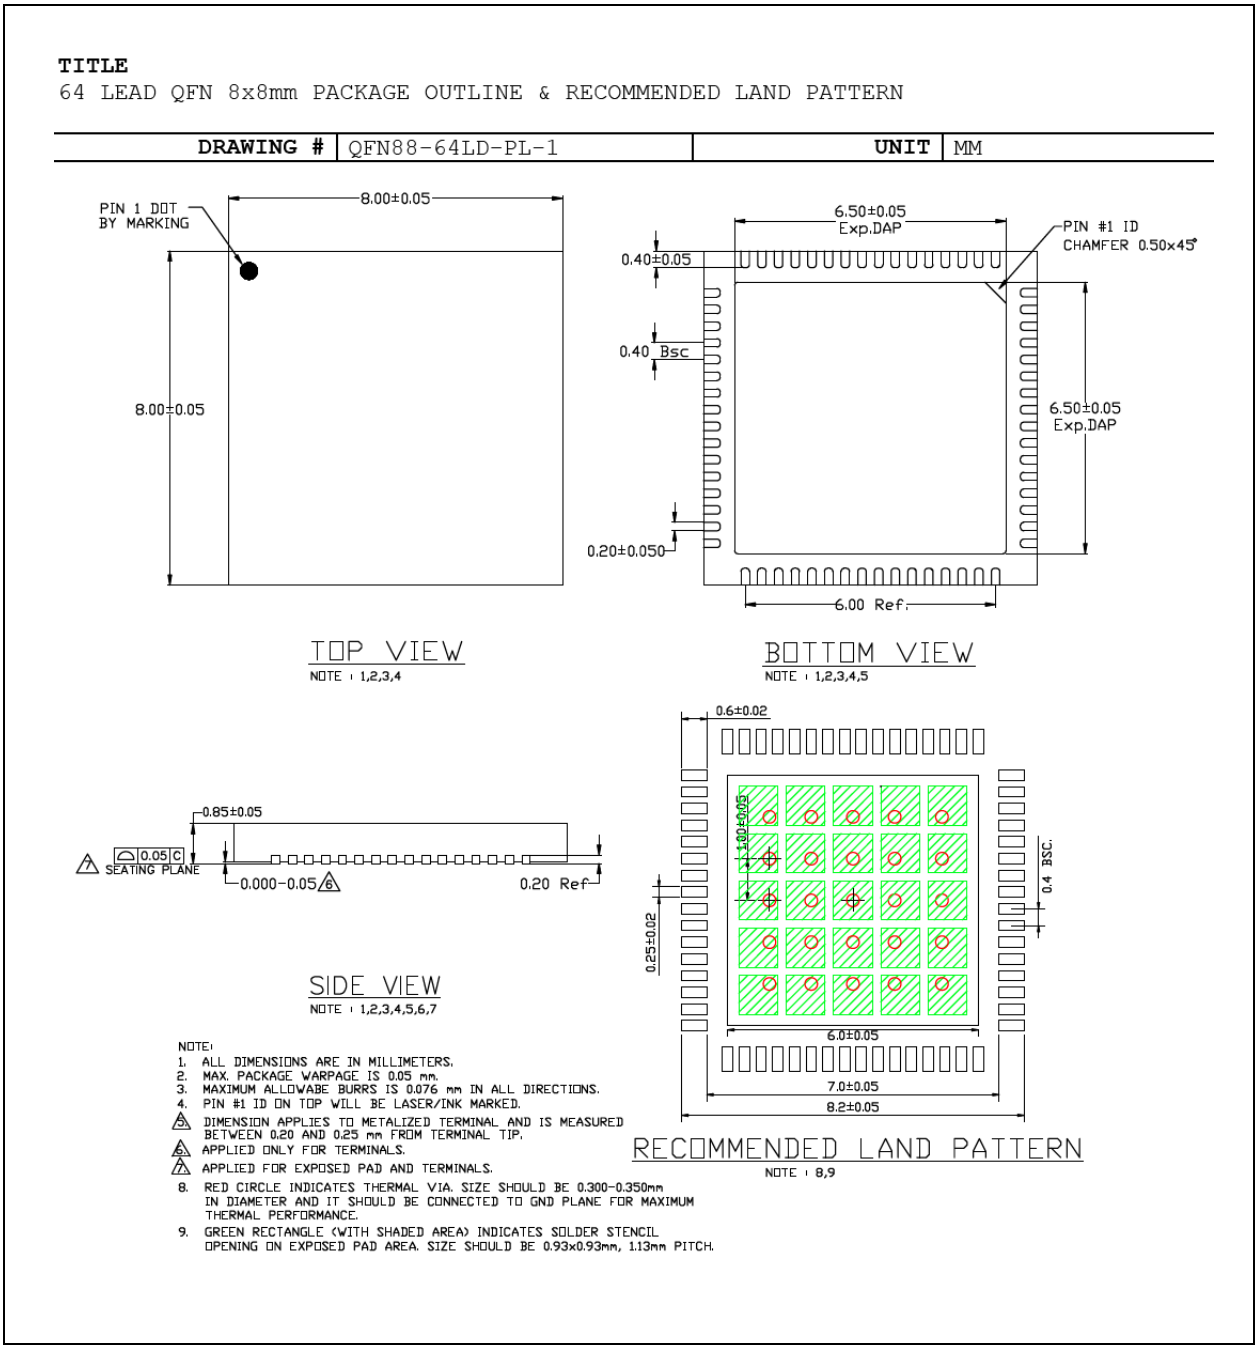



© 2018-2021 Microchip Technology Inc.

# APPENDIX A: DATA SHEET REVISION HISTORY

**TABLE A-1: REVISION HISTORY**

| Revision | Section/Figure/Entry | Correction |
|---|---|---|
| DS00002840C (04-20-21) | Table 3-8, "Device Mode Selections" | 1000BT Full Duplex need to change to 'no' for modes 1001 (9) and 1011 (11).<br>Replace one column "PME Pin Enable" with two columns: "Pin 19 Function" (PME_N1) and "Pin 53 Function" (PME_N2). |
| | **Section 4.13.3.1.1 "LED Combine"** | Note added at end of the paragraph: LED Behavior Register, Bit 15 = 1 (Default is 0) to set the LED Link/Activity to the desired value. This can be done in the same LED Behavior Register write to set the LED Combine Disables field. |
| | **Section 4.15 "LinkMD® Cable Diagnostic"** | 6th paragraph: Removed "With the Bit[9:0] Definition (VCT_SEL[1:0]) field set to 0," |
| | **Section 5.1 "Register Map"** | "These registers are accessed through the SMI (MDIO/MDC) interface." added before the registers. |
| | **Section 5.2.16 "LinkMD Cable Diagnostic Register"** | Register bits [11:10]: Reserved.<br>Register bits [9:8]: Sentences removed with "VCT_SEL".<br>Register bits [7:0]: Sentence removed about "VCT_SEL!=00". "When VCT_SEL = 0," removed in the next sentence. |
| | **Section 5.3 "MDIO Manageable Device (MMD) Registers"** | "These registers are accessed through the SMI (MDIO/MDC) interface." added before the registers. |
| | Table 6-3, "Power Consumption" | Right column, 85°C max power: 793.7 changed to 681.9 mW.<br>Right column, 105°C max power: 804.2 changed to 692.5 mW. |
| | **Section 6.4 "Power Consumption"** | Added new tables after Table 6-3, "Power Consumption": Table 6-4, Table 6-5, Table 6-6, Table 6-7 |
| | Table 6-11, "100BASE-TX Transceiver Characteristics" | Last row: Typical Reference voltage of ISET changed from "0.61 V" to "1.20 V". |
| | Figure 6-2, "Power Sequence Timing Internal Regulators" | VDDIO to DVDDH changed in the graphic. |
| | **Section 6.7 "Clock Circuit"** | Second sentence changed to "If the single-ended clock oscillator method is implemented, XO should be left unconnected and XI should be driven with either a nominal 0-2.5V or a nominal 0-3.3V clock signal, dependent on the supply level of AVDDH (2.5V and 3.3V, respectively)." |

**TABLE A-1: REVISION HISTORY (CONTINUED)**

| Revision | Section/Figure/Entry | Correction |
|---|---|---|
| DS00002840B (10-09-19) | Section 4.14.1, "Digital (near-end) Loopback" | Revised loopback steps |
| | Table 3-3, "GMII Interface" | Revised note in table |
| | Section 4.14.2, "Remote (far-end) Loopback" | Added step 3 |
| | Table 6-3, "Power Consumption" | Updated values |
| | Figure 6-13, "Reference Circuits For LED Strapping Pins" | Modified figure |
| DS00002840A (11-08-18) | All | Initial release. |


© 2018-2021 Microchip Technology Inc.

## THE MICROCHIP WEB SITE

Microchip provides online support via our WWW site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the web site at: http://microchip.com/support**

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| PART NO. | X | XX | X | [XX] |
|---|---|---|---|---|
| Device | Interface | Package | Temperature | Media Type |

| | | |
|---|---|---|
| **Device:** | KSZ9131 | |
| **Interface:** | M | = MII, GMII |
| **Package:** | NX | = 64-pin QFN |
| **Temperature:** | C | = 0°C to +70°C (Commercial) |
| | I | = -40°C to +85°C (Industrial) |
| **Media Type** | Blank | = Standard packaging (tray) |
| | TR | = Tape and Reel(Note 1) |

**Examples:**

a) KSZ9131MNXC
MII, GMII Interface
64-pin QFN (Pb-Free, 6.5 mm x 6.5 mm ePad)
Commercial Temperature
Tray

b) KSZ9131MNXC-TR
MII, GMII Interface
64-pin QFN (Pb-Free, 6.5 mm x 6.5 mm ePad)
Commercial Temperature
Tape and reel

c) KSZ9131MNXI
MII, GMII Interface
64-pin QFN (Pb-Free, 6.5 mm x 6.5 mm ePad)
Industrial Temperature
Tray

d) KSZ9131MNXI-TR
MII, GMII Interface
64-pin QFN (Pb-Free, 6.5 mm x 6.5 mm ePad)
Industrial Temperature
Tape and reel

**Note 1:** Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.


© 2018-2021 Microchip Technology Inc.

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.
The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.
GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2018-2021, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 9781522478874

*For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.*

# Worldwide Sales and Service


## AMERICAS

**Corporate Office**
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

**Atlanta**
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

**Austin, TX**
Tel: 512-257-3370

**Boston**
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

**Chicago**
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

**Dallas**
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

**Detroit**
Novi, MI
Tel: 248-848-4000

**Houston, TX**
Tel: 281-894-5983

**Indianapolis**
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

**Los Angeles**
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

**Raleigh, NC**
Tel: 919-844-7510

**New York, NY**
Tel: 631-435-6000

**San Jose, CA**
Tel: 408-735-9110
Tel: 408-436-4270

**Canada - Toronto**
Tel: 905-695-1980
Fax: 905-695-2078

## ASIA/PACIFIC

**Australia - Sydney**
Tel: 61-2-9868-6733

**China - Beijing**
Tel: 86-10-8569-7000

**China - Chengdu**
Tel: 86-28-8665-5511

**China - Chongqing**
Tel: 86-23-8980-9588

**China - Dongguan**
Tel: 86-769-8702-9880

**China - Guangzhou**
Tel: 86-20-8755-8029

**China - Hangzhou**
Tel: 86-571-8792-8115

**China - Hong Kong SAR**
Tel: 852-2943-5100

**China - Nanjing**
Tel: 86-25-8473-2460

**China - Qingdao**
Tel: 86-532-8502-7355

**China - Shanghai**
Tel: 86-21-3326-8000

**China - Shenyang**
Tel: 86-24-2334-2829

**China - Shenzhen**
Tel: 86-755-8864-2200

**China - Suzhou**
Tel: 86-186-6233-1526

**China - Wuhan**
Tel: 86-27-5980-5300

**China - Xian**
Tel: 86-29-8833-7252

**China - Xiamen**
Tel: 86-592-2388138

**China - Zhuhai**
Tel: 86-756-3210040

## ASIA/PACIFIC

**India - Bangalore**
Tel: 91-80-3090-4444

**India - New Delhi**
Tel: 91-11-4160-8631

**India - Pune**
Tel: 91-20-4121-0141

**Japan - Osaka**
Tel: 81-6-6152-7160

**Japan - Tokyo**
Tel: 81-3-6880- 3770

**Korea - Daegu**
Tel: 82-53-744-4301

**Korea - Seoul**
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**
Tel: 60-3-7651-7906

**Malaysia - Penang**
Tel: 60-4-227-8870

**Philippines - Manila**
Tel: 63-2-634-9065

**Singapore**
Tel: 65-6334-8870

**Taiwan - Hsin Chu**
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**
Tel: 886-7-213-7830

**Taiwan - Taipei**
Tel: 886-2-2508-8600

**Thailand - Bangkok**
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**
Tel: 84-28-5448-2100

## EUROPE

**Austria - Wels**
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

**Denmark - Copenhagen**
Tel: 45-4485-5910
Fax: 45-4485-2829

**Finland - Espoo**
Tel: 358-9-4520-820

**France - Paris**
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

**Germany - Garching**
Tel: 49-8931-9700

**Germany - Haan**
Tel: 49-2129-3766400

**Germany - Heilbronn**
Tel: 49-7131-72400

**Germany - Karlsruhe**
Tel: 49-721-625370

**Germany - Munich**
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

**Germany - Rosenheim**
Tel: 49-8031-354-560

**Israel - Ra'anana**
Tel: 972-9-744-7705

**Italy - Milan**
Tel: 39-0331-742611
Fax: 39-0331-466781

**Italy - Padova**
Tel: 39-049-7625286

**Netherlands - Drunen**
Tel: 31-416-690399
Fax: 31-416-690340

**Norway - Trondheim**
Tel: 47-7288-4388

**Poland - Warsaw**
Tel: 48-22-3325737

**Romania - Bucharest**
Tel: 40-21-407-87-50

**Spain - Madrid**
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

**Sweden - Gothenberg**
Tel: 46-31-704-60-40

**Sweden - Stockholm**
Tel: 46-8-5090-4654

**UK - Wokingham**
Tel: 44-118-921-5800
Fax: 44-118-921-5820


© 2018-2021 Microchip Technology Inc.