DDR4 SDRAM SODIMM

MTA8ATF1G64HZ – 8GB

Features

- DDR4 functionality and operations supported as defined in the component data sheet
- 260-pin, small-outline dual in-line memory module (SODIMM)
- Fast data transfer rates: PC4-3200, PC4-2666, or PC4-2400
- 8GB (1 Gig x 64)
- V_{DD} = 1.20V (NOM)
- V_{PP} = 2.5V (NOM)
- V_{DDSPD} = 2.5V (NOM)
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die V_{REFDQ} generation and calibration
- Single-rank
- On-board I^2C serial presence-detect (SPD) EEPROM
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Gold edge contacts
- Halogen-free
- Fly-by topology
- Terminated control command and address bus

Figure 1: 260-Pin SODIMM (R/C A1, R/C A2)

Module Height: 30mm (1.181in)

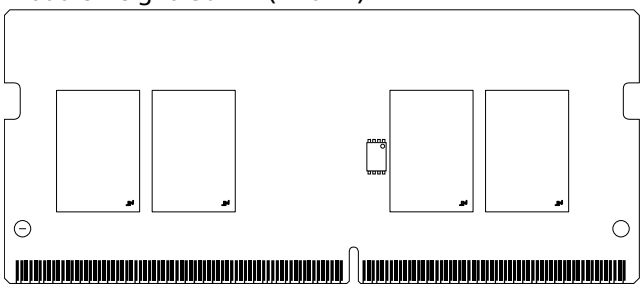

Options	Marking
• Operating temperature	
– Commercial (0°C ≤ T_{OPER} ≤ 95°C)	None
• Package	
– 260-pin DIMM (halogen-free)	Z
• Frequency/CAS latency	
– 0.62ns @ CL = 22 (DDR4-3200)	-3G2
– 0.75ns @ CL = 19 (DDR4-2666)	-2G6
– 0.83ns @ CL = 17 (DDR4-2400)	-2G3

Table 1: Key Timing Parameters

Speed Grade	PC4-	Data Rate (MT/s) CL = 24	22	21	20\19	18\17	16\15	14\13	12\11	10\9	^tRCD ns	^tRP ns	^tRC ns
-3G2	3200	3200, 2933	3200, 2933	2933	2666\2666	2400\2400	2133\2133	1866\1866	1600\1600	1333\–	13.75	13.75	45.75
-2G9	2933	–	2933	2933	2666\2666	2400\2400	2133\2133	1866\1866	1600\1600	1333\–	14.32 (13.75)[1]	14.32 (13.75)[1]	46.32 (45.75)[1]
-2G6	2666	–	–	–	2666\2666	2400\2400	2133\2133	1866\1866	1600\1600	1333\–	14.25 (13.75)[1]	14.25 (13.75)[1]	46.25 (45.75)[1]

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.
Products and specifications discussed herein are subject to change by Micron without notice.

Table 1: Key Timing Parameters (Continued)

Speed Grade	PC4-	Data Rate (MT/s) CL = 24	22	21	20\ 19	18\ 17	16\ 15	14\ 13	12\ 11	10\ 9	^{t}RCD ns	^{t}RP ns	^{t}RC ns
-2G3	2400	–	–	–	–	2400\ 2400	2133\ 2133	1866\ 1866	1600\ 1600	1333\ –	14.16 (13.75)[1]	14.16 (13.75)[1]	46.16 (45.75)[1]
-2G1	2133	–	–	–	–	–	2133\ 2133	1866\ 1866	1600\ 1600	1333\ 1333	14.06 (13.5)[1]	14.06 (13.5)[1]	47.06 (46.5)[1]

Note: 1. Down-bin timing, refer to component data sheet Speed Bin Tables for details.

Table 2: Addressing

Parameter	8GB
Row address	64K A[15:0]
Column address	1K A[9:0]
Device bank group address	4 BG[1:0]
Device bank address per group	4 BA[1:0]
Device configuration	8Gb (1 Gig x 8), 16 banks
Module rank address	CS0_n

Table 3: Part Numbers and Timing Parameters – 8GB Modules

Base device: MT40A1G8,[1] 8Gb DDR4 SDRAM

Part Number[2]	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (^{t}CL-^{t}RCD-^{t}RP)
MTA8ATF1G64HZ-3G2__	8GB	1 Gig x 64	25.6 GB/s	0.62ns/3200 MT/s	22-22-22
MTA8ATF1G64HZ-2G6__	8GB	1 Gig x 64	21.3 GB/s	0.75ns/2666 MT/s	19-19-19
MTA8ATF1G64HZ-2G3__	8GB	1 Gig x 64	19.2 GB/s	0.83ns/2400 MT/s	17-17-17

Notes: 1. The data sheet for the base device can be found on micron.com.
2. All part numbers end with a two-place code (not shown) that designates component and PCB revisions. Consult factory for current revision codes. Example: MTA8ATF1G64HZ-3G2R1.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Important Notes and Warnings

Micron Technology, Inc. ("Micron") reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions. This document supersedes and replaces all information supplied prior to the publication hereof. You may not rely on any information set forth in this document if you obtain the product described herein from any unauthorized distributor or other source not authorized by Micron.

Automotive Applications. Products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets. Distributor and customer/distributor shall assume the sole risk and liability for and shall indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting directly or indirectly from any use of non-automotive-grade products in automotive applications. Customer/distributor shall ensure that the terms and conditions of sale between customer/distributor and any customer of distributor/customer (1) state that Micron products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets and (2) require such customer of distributor/customer to indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting from any use of non-automotive-grade products in automotive applications.

Critical Applications. Products are not authorized for use in applications in which failure of the Micron component could result, directly or indirectly in death, personal injury, or severe property or environmental damage ("Critical Applications"). Customer must protect against death, personal injury, and severe property and environmental damage by incorporating safety design measures into customer's applications to ensure that failure of the Micron component will not result in such harms. Should customer or distributor purchase, use, or sell any Micron component for any critical application, customer and distributor shall indemnify and hold harmless Micron and its subsidiaries, subcontractors, and affiliates and the directors, officers, and employees of each against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, or death arising in any way out of such critical application, whether or not Micron or its subsidiaries, subcontractors, or affiliates were negligent in the design, manufacture, or warning of the Micron product.

Customer Responsibility. Customers are responsible for the design, manufacture, and operation of their systems, applications, and products using Micron products. ALL SEMICONDUCTOR PRODUCTS HAVE INHERENT FAILURE RATES AND LIMITED USEFUL LIVES. IT IS THE CUSTOMER'S SOLE RESPONSIBILITY TO DETERMINE WHETHER THE MICRON PRODUCT IS SUITABLE AND FIT FOR THE CUSTOMER'S SYSTEM, APPLICATION, OR PRODUCT. Customers must ensure that adequate design, manufacturing, and operating safeguards are included in customer's applications and products to eliminate the risk that personal injury, death, or severe property or environmental damages will result from failure of any semiconductor component.

Limited Warranty. In no event shall Micron be liable for any indirect, incidental, punitive, special or consequential damages (including without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort, warranty, breach of contract or other legal theory, unless explicitly stated in a written agreement executed by Micron's duly authorized representative.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Pin Assignments

The pin assignment table below is a comprehensive list of all possible pin assignments for DDR4 SODIMM modules. See the Functional Block Diagram located in the module MPN data sheet addendum for pins specific to the module.

Table 4: Pin Assignments

260-Pin DDR4 SODIMM Front								260-Pin DDR4 SODIMM Back							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
1	V_{SS}	67	DQ29	133	A1	199	DM5_n/ DBI5_n	2	V_{SS}	68	V_{SS}	134	EVENT_n, NF	200	DQS5_t
3	DQ5	69	V_{SS}	135	V_{DD}	201	V_{SS}	4	DQ4	70	DQ24	136	V_{DD}	202	V_{SS}
5	V_{SS}	71	DQ25	137	CK0_t	203	DQ46	6	V_{SS}	72	V_{SS}	138	CK1_t/NF	204	DQ47
7	DQ1	73	V_{SS}	139	CK0_c	205	V_{SS}	8	DQ0	74	DQS3_c	140	CK1_c/NF	206	V_{SS}
9	V_{SS}	75	DM3_n/ DBI3_n	141	V_{DD}	207	DQ42	10	V_{SS}	76	DQS3_t	142	V_{DD}	208	DQ43
11	DQS0_c	77	V_{SS}	143	PARITY	209	V_{SS}	12	DM0_n/ DBI0_n	78	V_{SS}	144	A0	210	V_{SS}
13	DQS0_t	79	DQ30	145	BA1	211	DQ52	14	V_{SS}	80	DQ31	146	A10/AP	212	DQ53
15	V_{SS}	81	V_{SS}	147	V_{DD}	213	V_{SS}	16	DQ6	82	V_{SS}	148	V_{DD}	214	V_{SS}
17	DQ7	83	DQ26	149	CS0_n	215	DQ49	18	V_{SS}	84	DQ27	150	BA0	216	DQ48
19	V_{SS}	85	V_{SS}	151	WE_n/ A14	217	V_{SS}	20	DQ2	86	V_{SS}	152	RAS_n/ A16	218	V_{SS}
21	DQ3	87	CB5/NC	153	V_{DD}	219	DQS6_c	22	V_{SS}	88	CB4/NC	154	V_{DD}	220	DM6_n/ DBI6_n
23	V_{SS}	89	V_{SS}	155	ODT0	221	DQS6_t	24	DQ12	90	V_{SS}	156	CAS_n/ A15	222	V_{SS}
25	DQ13	91	CB1/NC	157	CS1_n/ NC	223	V_{SS}	26	V_{SS}	92	CB0/NC	158	A13	224	DQ54
27	V_{SS}	93	V_{SS}	159	V_{DD}	225	DQ55	28	DQ8	94	V_{SS}	160	V_{DD}	226	V_{SS}
29	DQ9	95	DQS8_c/ NC	161	ODT1/ NC	227	V_{SS}	30	V_{SS}	96	DM8_n/ DBI_n/NC	162	C0/ CS2_n/NC	228	DQ50
31	V_{SS}	97	DQS8_t/ NC	163	V_{DD}	229	DQ51	32	DQS1_c	98	V_{SS}	164	V_{REFCA}	230	V_{SS}
33	DM1_n/ DBI_n	99	V_{SS}	165	C1, CS3_n, NC	231	V_{SS}	34	DQS1_t	100	CB6/NC	166	SA2	232	DQ60
35	V_{SS}	101	CB2/NC	167	V_{SS}	233	DQ61	36	V_{SS}	102	V_{SS}	168	V_{SS}	234	V_{SS}
37	DQ15	103	V_{SS}	169	DQ37	235	V_{SS}	38	DQ14	104	CB7/NC	170	DQ36	236	DQ57
39	V_{SS}	105	CB3/NC	171	V_{SS}	237	DQ56	40	V_{SS}	106	V_{SS}	172	V_{SS}	238	V_{SS}
41	DQ10	107	V_{SS}	173	DQ33	239	V_{SS}	42	DQ11	108	RESET_n	174	DQ32	240	DQS7_c
43	V_{SS}	109	CKE0	175	V_{SS}	241	DM7_n/ DBI7_n	44	V_{SS}	110	CKE1/ NC	176	V_{SS}	242	DQS7_t
45	DQ21	111	V_{DD}	177	DQS4_c	243	V_{SS}	46	DQ20	112	V_{DD}	178	DM4_n/ DBI4_n	244	V_{SS}
47	V_{SS}	113	BG1	179	DQS4_t	245	DQ62	48	V_{SS}	114	ACT_n	180	V_{SS}	246	DQ63
49	DQ17	115	BG0	181	V_{SS}	247	V_{SS}	50	DQ16	116	ALERT_n	182	DQ39	248	V_{SS}
51	V_{SS}	117	V_{DD}	183	DQ38	249	DQ58	52	V_{SS}	118	V_{DD}	184	V_{SS}	250	DQ59
53	DQS2_c	119	A12	185	V_{SS}	251	V_{SS}	54	DM2_n/ DBI2_n	120	A11	186	DQ35	252	V_{SS}
55	DQS2_t	121	A9	187	DQ34	253	SCL	56	V_{SS}	122	A7	188	V_{SS}	254	SDA
57	V_{SS}	123	V_{DD}	189	V_{SS}	255	V_{DDSPD}	58	DQ22	124	V_{DD}	190	DQ45	256	SA0

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 4: Pin Assignments (Continued)

260-Pin DDR4 SODIMM Front								260-Pin DDR4 SODIMM Back							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
59	DQ23	125	A8	191	DQ44	257	V_{PP}	60	V_{SS}	126	A5	192	V_{SS}	258	V_{TT}
61	V_{SS}	127	A6	193	V_{SS}	259	V_{PP}	62	DQ18	128	A4	194	DQ41	260	SA1
63	DQ19	129	V_{DD}	195	DQ40	–	–	64	V_{SS}	130	V_{DD}	196	V_{SS}	–	–
65	V_{SS}	131	A3	197	V_{SS}	–	–	66	DQ28	132	A2	198	DQS5_c	–	–

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Pin Descriptions

The pin description table below is a comprehensive list of all possible pins for DDR4 modules. All pins listed may not be supported on this module. See the Functional Block Diagram located in the module MPN data sheet addendum for pins specific to the module.

Table 5: Pin Descriptions

Symbol	Type	Description
Ax	Input	**Address inputs:** Provide the row address for ACTIVATE commands and the column address for READ/WRITE commands in order to select one location out of the memory array in the respective bank (A10/AP, A12/BC_n, WE_n/A14, CAS_n/A15, and RAS_n/A16 have additional functions; see individual entries in this table). The address inputs also provide the op-code during the MODE REGISTER SET command. A17 is only defined for x4 SDRAM.
A10/AP	Input	**Auto precharge:** A10 is sampled during READ and WRITE commands to determine whether an auto precharge should be performed on the accessed bank after a READ or WRITE operation (HIGH = auto precharge; LOW = no auto precharge). A10 is sampled during a PRECHARGE command to determine whether the precharge applies to one bank (A10 LOW) or all banks (A10 HIGH). If only one bank is to be precharged, the bank is selected by the bank group and bank addresses.
A12/BC_n	Input	**Burst chop:** A12/BC_n is sampled during READ and WRITE commands to determine if burst chop (on-the-fly) will be performed (HIGH = no burst chop; LOW = burst chopped). See Command Truth Table in the DDR4 component data sheet.
ACT_n	Input	**Command input:** ACT_n defines the ACTIVATE command being entered along with CS_n. The input into RAS_n/A16, CAS_n/A15, and WE_n/A14 are considered as row address A16, A15, and A14. See Command Truth Table.
BAx	Input	**Bank address inputs:** Define the bank (with a bank group) to which an ACTIVATE, READ, WRITE, or PRECHARGE command is being applied. Also determine which mode register is to be accessed during a MODE REGISTER SET command.
BGx	Input	**Bank group address inputs:** Define the bank group to which a REFRESH, ACTIVATE, READ, WRITE, or PRECHARGE command is being applied. Also determine which mode register is to be accessed during a MODE REGISTER SET command. BG[1:0] are used in the x4 and x8 configurations. x16-based SDRAM only has BG0.
C0, C1, C2 (RDIMM/LRDIMM only)	Input	**Chip ID:** These inputs are used only when devices are stacked; that is, 2H, 4H, and 8H stacks for x4 and x8 configurations using through-silicon vias (TSVs). These pins are not used in the x16 configuration. Some DDR4 modules support a traditional DDP package, which uses CS1_n, CKE1, and ODT1 to control the second die. All other stack configurations, such as a 4H or 8H, are assumed to be single-load (master/slave) type configurations where C0, C1, and C2 are used as chip ID selects in conjunction with a single CS_n, CKE, and ODT. Chip ID is considered part of the command code.
CKx_t CKx_c	Input	**Clock:** Differential clock inputs. All address, command, and control input signals are sampled on the crossing of the positive edge of CK_t and the negative edge of CK_c.
CKEx	Input	**Clock enable:** CKE HIGH activates and CKE LOW deactivates the internal clock signals, device input buffers, and output drivers. Taking CKE LOW provides PRECHARGE POWER-DOWN and SELF REFRESH operations (all banks idle), or active power-down (row active in any bank). CKE is asynchronous for self refresh exit. After V_{REFCA} has become stable during the power-on and initialization sequence, it must be maintained during all operations (including SELF REFRESH). CKE must be maintained HIGH throughout read and write accesses. Input buffers (excluding CK_t, CK_c, ODT, RESET_n, and CKE) are disabled during power-down. Input buffers (excluding CKE and RESET_n) are disabled during self refresh.
CSx_n	Input	**Chip select:** All commands are masked when CS_n is registered HIGH. CS_n provides external rank selection on systems with multiple ranks. CS_n is considered part of the command code (CS2_n and CS3_n are not used on UDIMMs).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 5: Pin Descriptions (Continued)

Symbol	Type	Description
ODTx	Input	**On-die termination:** ODT (registered HIGH) enables termination resistance internal to the DDR4 SDRAM. When enabled, ODT (R_{TT}) is applied only to each DQ, DQS_t, DQS_c, DM_n/DBI_n/TDQS_t, and TDQS_c signal for x4 and x8 configurations (when the TDQS function is enabled via the mode register). For the x16 configuration, R_{TT} is applied to each DQ, DQSU_t, DQSU_c, DQSL_t, DQSL_c, UDM_n, and LDM_n signal. The ODT pin will be ignored if the mode registers are programmed to disable R_{TT}.
PARITY	Input	**Parity for command and address:** This function can be enabled or disabled via the mode register. When enabled in MR5, the DRAM calculates parity with ACT_n, RAS_n/A16, CAS_n/A15, WE_n/A14, BG[1:0], BA[1:0], A[16:0]. Input parity should be maintained at the rising edge of the clock and at the same time as command and address with CS_n LOW.
RAS_n/A16 CAS_n/A15 WE_n/A14	Input	**Command inputs:** RAS_n/A16, CAS_n/A15, and WE_n/A14 (along with CS_n) define the command and/or address being entered and have multiple functions. For example, for activation with ACT_n LOW, these are addresses like A16, A15, and A14, but for a non-activation command with ACT_n HIGH, these are command pins for READ, WRITE, and other commands defined in Command Truth Table.
RESET_n	CMOS Input	**Active LOW asynchronous reset:** Reset is active when RESET_n is LOW and inactive when RESET_n is HIGH. RESET_n must be HIGH during normal operation.
SAx	Input	**Serial address inputs:** Used to configure the temperature sensor/SPD EEPROM address range on the I^2C bus.
SCL	Input	**Serial clock for temperature sensor/SPD EEPROM:** Used to synchronize communication to and from the temperature sensor/SPD EEPROM on the I^2C bus.
DQx, CBx	I/O	**Data input/output and check bit input/output:** Bidirectional data bus. DQ represents DQ[3:0], DQ[7:0], and DQ[15:0] for the x4, x8, and x16 configurations, respectively. If cyclic redundancy checksum (CRC) is enabled via the mode register, the CRC code is added at the end of the data burst. Any one or all of DQ0, DQ1, DQ2, or DQ3 may be used for monitoring of internal V_{REF} level during test via mode register setting MR[4] A[4] = HIGH; training times change when enabled.
DM_n/DBI_n/ TDQS_t (DMU_n, DBIU_n), (DML_n/ DBIl_n)	I/O	**Input data mask and data bus inversion:** DM_n is an input mask signal for write data. Input data is masked when DM_n is sampled LOW coincident with that input data during a write access. DM_n is sampled on both edges of DQS. DM is multiplexed with the DBI function by the mode register A10, A11, and A12 settings in MR5. For a x8 device, the function of DM or TDQS is enabled by the mode register A11 setting in MR1. DBI_n is an input/output identifying whether to store/output the true or inverted data. If DBI_n is LOW, the data will be stored/output after inversion inside the DDR4 device and not inverted if DBI_n is HIGH. TDQS is only supported in x8 SDRAM configurations (TDQS is not valid for UDIMMs).
SDA	I/O	**Serial Data:** Bidirectional signal used to transfer data in or out of the EEPROM or EEPROM/TS combo device.
DQS_t DQS_c DQSU_t DQSU_c DQSL_t DQSL_c	I/O	**Data strobe:** Output with read data, input with write data. Edge-aligned with read data, centered-aligned with write data. For x16 configurations, DQSL corresponds to the data on DQ[7:0], and DQSU corresponds to the data on DQ[15:8]. For the x4 and x8 configurations, DQS corresponds to the data on DQ[3:0] and DQ[7:0], respectively. DDR4 SDRAM supports a differential data strobe only and does not support a single-ended data strobe.
ALERT_n	Output	**Alert output:** Possesses functions such as CRC error flag and command and address parity error flag as output signal. If a CRC error occurs, ALERT_n goes LOW for the period time interval and returns HIGH. If an error occurs during a command address parity check, ALERT_n goes LOW until the on-going DRAM internal recovery transaction is complete. During connectivity test mode, this pin functions as an input. Use of this signal is system-dependent. If not connected as signal, ALERT_n pin must be connected to V_{DD} on DIMMs.
EVENT_n	Output	**Temperature event:** The EVENT_n pin is asserted by the temperature sensor when critical temperature thresholds have been exceeded. This pin has no function (NF) on modules without temperature sensors.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 5: Pin Descriptions (Continued)

Symbol	Type	Description
TDQS_t TDQS_c (x8 DRAM-based RDIMM only)	Output	**Termination data strobe:** When enabled via the mode register, the DRAM device enables the same R_{TT} termination resistance on TDQS_t and TDQS_c that is applied to DQS_t and DQS_c. When the TDQS function is disabled via the mode register, the DM/TDQS_t pin provides the data mask (DM) function, and the TDQS_c pin is not used. The TDQS function must be disabled in the mode register for both the x4 and x16 configurations. The DM function is supported only in x8 and x16 configurations. DM, DBI, and TDQS are a shared pin and are enabled/disabled by mode register settings. For more information about TDQS, see the DDR4 DRAM component data sheet (TDQS_t and TDQS_c are not valid for UDIMMs).
V_{DD}	Supply	**Module power supply:** 1.2V (TYP).
V_{PP}	Supply	**DRAM activating power supply:** 2.5V –0.125V/+0.250V.
V_{REFCA}	Supply	Reference voltage for control, command, and address pins.
V_{SS}	Supply	Ground.
V_{TT}	Supply	Power supply for termination of address, command, and control $V_{DD}/2$.
V_{DDSPD}	Supply	Power supply used to power the I^2C bus for SPD.
RFU	–	Reserved for future use.
NC	–	**No connect:** No internal electrical connection is present.
NF	–	**No function:** May have internal connection present, but has no function.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

DQ Maps

Table 6: Component-to-Module DQ Map (PCB 2265, R/C-A1)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U1	0	3	21	U2	0	19	63
	1	0	8		1	17	49
	2	2	20		2	18	62
	3	1	7		3	16	50
	4	6	16		4	22	58
	5	4	4		5	21	45
	6	7	17		6	23	59
	7	5	3		7	20	46
U4	0	38	183	U5	0	55	225
	1	36	170		1	52	211
	2	39	182		2	54	224
	3	37	169		3	53	212
	4	35	186		4	50	228
	5	32	174		5	49	215
	6	34	187		6	51	229
	7	33	173		7	48	216
U6	0	56	237	U7	0	40	195
	1	58	249		1	42	207
	2	57	236		2	41	194
	3	59	250		3	43	208
	4	61	233		4	44	191
	5	62	245		5	47	204
	6	60	232		6	45	190
	7	63	246		7	46	203
U8	0	29	67	U9	0	12	24
	1	30	79		1	15	37
	2	28	66		2	13	25
	3	31	80		3	14	38
	4	24	70		4	9	29
	5	26	83		5	10	41
	6	25	71		6	8	28
	7	27	84		7	11	42

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 7: Component-to-Module DQ Map (PCB 2374, R/C-A2)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U1	0	7	17	U2	0	23	59
	1	5	3		1	21	45
	2	6	16		2	22	58
	3	4	4		3	20	46
	4	3	21		4	19	63
	5	0	8		5	16	50
	6	2	20		6	18	62
	7	1	7		7	17	49
U4	0	38	183	U5	0	55	225
	1	37	169		1	52	211
	2	39	182		2	54	224
	3	36	170		3	53	212
	4	34	187		4	51	229
	5	32	174		5	48	216
	6	35	186		6	50	228
	7	33	173		7	49	215
U6	0	60	232	U7	0	40	195
	1	62	245		1	43	208
	2	61	233		2	41	194
	3	63	246		3	42	207
	4	57	236		4	45	190
	5	58	249		5	46	203
	6	56	237		6	44	191
	7	59	250		7	47	204
U8	0	28	66	U9	0	12	24
	1	30	79		1	15	37
	2	29	67		2	13	25
	3	31	80		3	14	38
	4	25	71		4	9	29
	5	26	83		5	10	41
	6	24	70		6	8	28
	7	27	84		7	11	42

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Functional Block Diagram

Figure 2: Functional Block Diagram

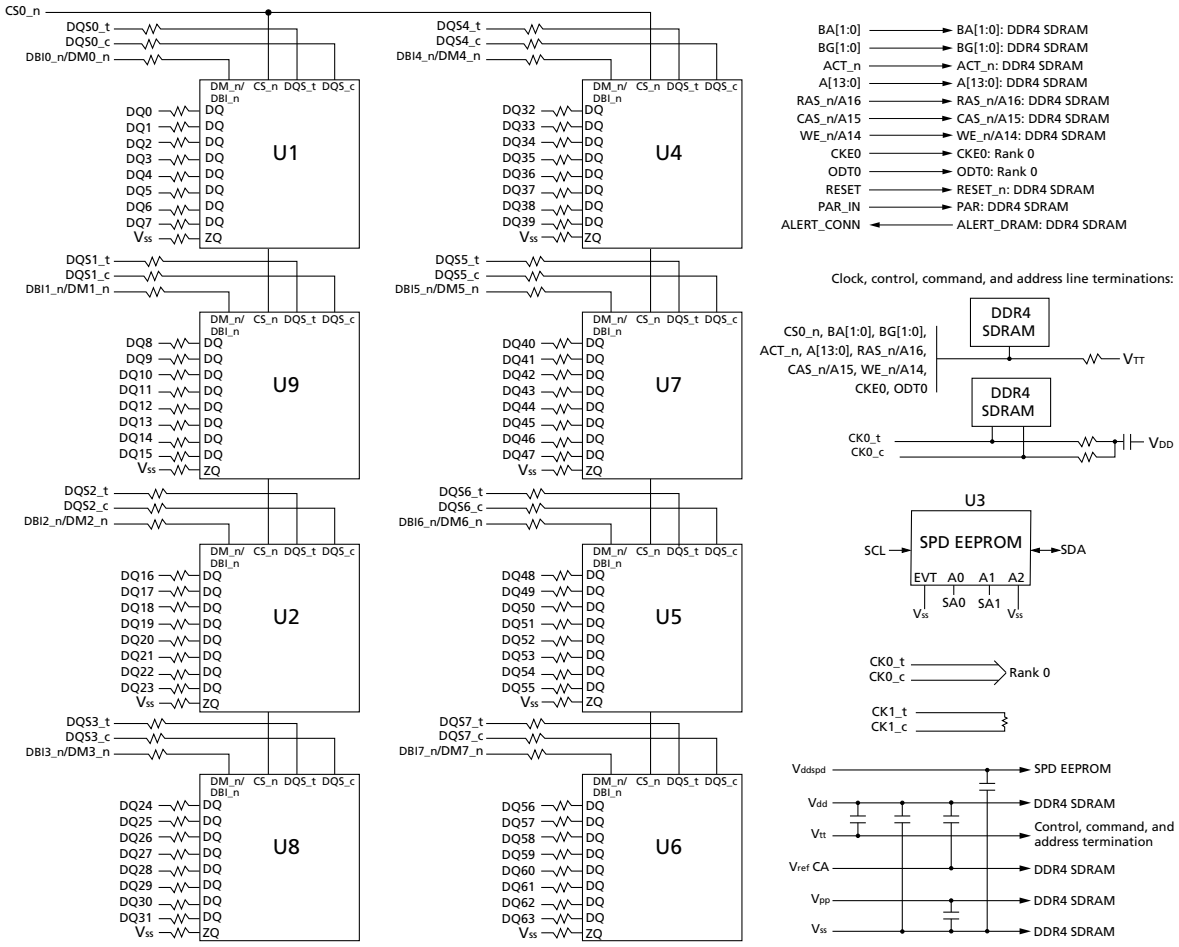

Note: 1. The ZQ ball on each DDR4 component is connected to an external 240Ω ±1% resistor that is tied to ground. It is used for the calibration of the component's ODT and output driver.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

General Description

High-speed DDR4 SDRAM modules use DDR4 SDRAM devices with two or four internal memory bank groups. DDR4 SDRAM modules utilizing 4- and 8-bit-wide DDR4 SDRAM devices have four internal bank groups consisting of four memory banks each, providing a total of 16 banks. 16-bit-wide DDR4 SDRAM devices have two internal bank groups consisting of four memory banks each, providing a total of eight banks. DDR4 SDRAM modules benefit from the DDR4 SDRAM's use of an 8*n*-prefetch architecture with an interface designed to transfer two data words per clock cycle at the I/O pins. A single READ or WRITE operation for the DDR4 SDRAM effectively consists of a single 8*n*-bit-wide, four-clock data transfer at the internal DRAM core and eight corresponding *n*-bit-wide, one-half-clock-cycle data transfers at the I/O pins.

DDR4 modules use two sets of differential signals: DQS_t and DQS_c to capture data and CK_t and CK_c to capture commands, addresses, and control signals. Differential clocks and data strobes ensure exceptional noise immunity for these signals and provide precise crossing points to capture input signals.

Fly-By Topology

DDR4 modules use faster clock speeds than earlier DDR technologies, making signal quality more important than ever. For improved signal quality, the clock, control, command, and address buses have been routed in a fly-by topology, where each clock, control, command, and address pin on each DRAM is connected to a single trace and terminated (rather than a tree structure, where the termination is off the module near the connector). Inherent to fly-by topology, the timing skew between the clock and DQS signals can be accounted for by using the write-leveling feature of DDR4.

Module Manufacturing Location

Micron Technology manufactures modules at sites worldwide. Customers may receive modules from any of the manufacturing locations listed below.

Table 8: DRAM Module Manufacturing Locations

Manufacturing Site Location	Country of Origin Specified on Label
Boise, USA	USA
Aguadilla, Puerto Rico	Puerto Rico
Xian, China	China
Singapore	Singapore

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Address Mapping to DRAM

Address Mirroring

To achieve optimum routing of the address bus on DDR4 multirank modules, the address bus will be wired as shown in the table below, or mirrored. For quad-rank modules, ranks 1 and 3 are mirrored, and ranks 0 and 2 are non-mirrored. Highlighted address pins have no secondary functions allowing for normal operation when cross-wired. Data is still read from the same address it was written. However, LOAD MODE operations require a specific address. This requires the controller to accommodate for a rank that is mirrored. Systems may reference DDR4 SPD to determine whether the module has mirroring implemented or not. See the JEDEC DDR4 SPD specification for more details.

Table 9: Address Mirroring

Edge Connector Pin	DRAM Pin, Non-Mirrored	DRAM Pin, Mirrored
A0	A0	A0
A1	A1	A1
A2	A2	A2
A3	A3	A4
A4	A4	A3
A5	A5	A6
A6	A6	A5
A7	A7	A8
A8	A8	A7
A9	A9	A9
A10	A10	A10
A11	A11	A13
A13	A13	A11
A12	A12	A12
A14	A14	A14
A15	A15	A15
A16	A16	A16
A17	A17	A17
BA0	BA0	BA1
BA1	BA1	BA0
BG0	BG0	BG1
BG1	BG1	BG0

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

SPD EEPROM Operation

DDR4 SDRAM modules incorporate serial presence detect (SPD). The SPD data is stored in a 512-byte JEDEC JC-42.4-compliant EEPROM that is segregated into four 128-byte, write-protectable blocks. The SPD content is aligned with these blocks as shown in the table below.

Block	Range		Description
0	0–127	000h–07Fh	Configuration and DRAM parameters
1	128–255	080h–0FFh	Module-specific parameters
2	256–319	100h–13Fh	Reserved; all bytes coded as 00h
	320–383	140h–17Fh	Manufacturing information
3	384–511	180h–1FFh	End-user programmable

The first 384 bytes are programmed by Micron to comply with JEDEC standard JC-45, "Appendix X: Serial Presence Detect (SPD) for DDR4 SDRAM Modules." The remaining 128 bytes of storage are available for use by the customer.

The EEPROM resides on a two-wire I^2C serial interface and is not integrated with the memory bus in any way. It operates as a slave device in the I^2C bus protocol, with all operations synchronized by the serial clock. Transfer rates of up to 1 MHz are achievable at 2.5V (NOM).

Micron implements reversible software write protection on DDR4 SDRAM-based modules. This prevents the lower 384 bytes (bytes 0–383) from being inadvertently programmed or corrupted. The upper 128 bytes remain available for customer use and unprotected.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Electrical Specifications

Stresses greater than those listed may cause permanent damage to the module. This is a stress rating only, and functional operation of the module at these or any other conditions outside those indicated in each device's data sheet is not implied. Exposure to absolute maximum rating conditions for extended periods may adversely affect reliability.

Table 10: Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Units	Notes
V_{DD}	V_{DD} supply voltage relative to V_{SS}	–0.4	1.5	V	1
V_{DDQ}	V_{DDQ} supply voltage relative to V_{SS}	–0.4	1.5	V	1
V_{PP}	Voltage on V_{PP} pin relative to V_{SS}	–0.4	3.0	V	2
V_{IN}, V_{OUT}	Voltage on any pin relative to V_{SS}	–0.4	1.5	V	

Table 11: Operating Conditions

Symbol	Parameter	Min	Nom	Max	Units	Notes
V_{DD}	V_{DD} supply voltage	1.14	1.2	1.26	V	1
V_{PP}	DRAM activating power supply	2.375	2.5	2.75	V	2
$V_{REFCA(DC)}$	Input reference voltage command/ address bus	0.49 × V_{DD}	0.5 × V_{DD}	0.51 × V_{DD}	V	3
I_{VTT}	Termination reference current from V_{TT}	–500	–	500	mA	
V_{TT}	Termination reference voltage (DC) – command/address bus	0.49 × V_{DD} - 20mV	0.5 × V_{DD}	0.51 × V_{DD} + 20mV	V	4
I_{IN}	Input leakage current; any input excluding ZQ; 0V < V_{IN} < 1.1V	–2.0	–	2.0	µA	5
I_{ZQ}	Input leakage current; ZQ	–50.0	–	10.0	µA	5, 6
I_{OZpd}	Output leakage current; V_{OUT} = V_{DD}; DQ is High-Z	–	–	10.0	µA	7
I_{OZpu}	Output leakage current; V_{OUT} = V_{SS}; DQ is High-Z; ODT is disabled with ODT input HIGH	–50.0	–	–	µA	7
I_{VREFCA}	V_{REFCA} leakage; V_{REFCA} = V_{DD}/2 (after DRAM is initialized)	–2.0	–	2.0	µA	5

Notes:
1. V_{DDQ} tracks with V_{DD}; V_{DDQ} and V_{DD} are tied together.
2. V_{PP} must be greater than or equal to V_{DD} at all times.
3. V_{REFCA} must not be greater than 0.6 x V_{DD}. When V_{DD} is less than 500mV, V_{REF} may be less than or equal to 300mV.
4. V_{TT} termination voltages in excess of the specification limit adversely affect the voltage margins of command and address signals and reduce timing margins.
5. Multiply by the number of DRAM die on the module.
6. Tied to ground. Not connected to edge connector.
7. Multiply by the number of module ranks and then times the number of die per package.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 12: Thermal Characteristics

Symbol	Parameter/Condition	Value	Units	Notes
T_C	Commercial operating case temperature	0 to 85	°C	1, 2, 3
T_C		>85 to 95	°C	1, 2, 3, 4
T_{OPER}	Normal operating temperature range	0 to 85	°C	5, 7
T_{OPER}	Extended temperature operating range (optional)	>85 to 95	°C	5, 7
T_{STG}	Non-operating storage temperature	–55 to 100	°C	6
RH_{STG}	Non-operating Storage Relative Humidity (non-condensing)	5 to 95	%	
NA	Change Rate of Storage Temperature	20	°C/hour	

Notes:
1. Maximum operating case temperature; T_C is measured in the center of the package.
2. A thermal solution must be designed to ensure the DRAM device does not exceed the maximum T_C during operation.
3. Device functionality is not guaranteed if the DRAM device exceeds the maximum T_C during operation.
4. If T_C exceeds 85°C, the DRAM must be refreshed externally at 2X refresh, which is a 3.9µs interval refresh rate.
5. The refresh rate must double when 85°C < T_{OPER} ≤ 95°C.
6. Storage temperature is defined as the temperature of the top/center of the DRAM and does not reflect the storage temperatures of shipping trays.
7. For additional information, refer to technical note TN-00-08: "Thermal Applications" available at micron.com.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

DRAM Operating Conditions

Recommended AC operating conditions are given in the DDR4 component data sheets. Component specifications are available at micron.com. Module speed grades correlate with component speed grades, as shown below.

Table 13: Module and Component Speed Grades

DDR4 components may exceed the listed module speed grades; module may not be available in all listed speed grades

Module Speed Grade	Component Speed Grade
-3G2	-062E
-2G9	-068
-2G6	-075
-2G3	-083
-2G1	-093E

Design Considerations

Simulations

Micron memory modules are designed to optimize signal integrity through carefully designed terminations, controlled board impedances, routing topologies, trace length matching, and decoupling. However, good signal integrity starts at the system level. Micron encourages designers to simulate the signal characteristics of the system's memory bus to ensure adequate signal integrity of the entire memory system.

Power

Operating voltages are specified at the edge connector of the module, not at the DRAM. Designers must account for any system voltage drops at anticipated power levels to ensure the required supply voltage is maintained.

I_{DD}, I_{PP}, and I_{DDQ} Specifications

I_{DD} and I_{PP} values are only for the DDR4 SDRAM and are calculated from values in the supporting component data sheet. I_{PP} and I_{DDQ} currents are not included in I_{DD} currents. I_{DD} and I_{DDQ} currents are not included in I_{PP} currents. Micron does not specify I_{DDQ} currents. In DRAM module application, I_{DDQ} cannot be measured separately because V_{DD} and V_{DDQ} use a merged power layer in the module PCB.

Certain I_{DD}/I_{PP} conditions must be derated for optional modes of operation, such as CA parity, DBI, write CRC, additive latency, geardown, CAL, 2X and 4X REF, and DLL disabled. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

I_{DD} Specifications

Table 14: DDR4 I_{DD} Specifications and Conditions – 8GB (Die Revision D)

Values are for the MT40A1G8 DDR4 SDRAM only and are computed from values specified in the 8Gb (1 Gig x 8) component data sheet

Parameter	Symbol	3200	2666	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}	456	408	mA
One bank ACTIVATE-PRECHARGE, Word Line Boost, I_{PP} current	I_{PP0}	24	24	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}	552	504	mA
Precharge standby current	I_{DD2N}	296	280	mA
Precharge standby ODT current	I_{DD2NT}	480	400	mA
Precharge power-down current	I_{DD2P}	200	200	mA
Precharge quiet standby current	I_{DD2Q}	240	240	mA
Active standby current	I_{DD3N}	448	408	mA
Active standby I_{PP} current	I_{PP3N}	24	24	mA
Active power-down current	I_{DD3P}	344	312	mA
Burst read current	I_{DD4R}	1344	1168	mA
Burst write current	I_{DD4W}	1280	1136	mA
Burst refresh current (1x REF)	I_{DD5R}	528	488	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}	40	40	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}	248	248	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}	288	288	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}	168	168	mA
Auto self refresh current (25°C)	I_{DD6A}	68.8	68.8	mA
Auto self refresh current (45°C)	I_{DD6A}	168	168	mA
Auto self refresh current (75°C)	I_{DD6A}	248	248	mA
Auto self refresh I_{PP} current	I_{PP6X}	40	40	mA
Bank interleave read current	I_{DD7}	1520	1440	mA
Bank interleave read I_{PP} current	I_{PP7}	120	120	mA
Maximum power-down current	I_{DD8}	200	200	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 15: DDR4 I_{DD} Specifications and Conditions – 8GB (Die Revision E)

Values are for the MT40A1G8 DDR4 SDRAM only and are computed from values specified in the 8Gb (1 Gig x 8) component data sheet

Parameter	Symbol	3200	2666	2400	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}	376	344	328	mA
One bank ACTIVATE-PRECHARGE, Word Line Boost, I_{PP} current	I_{PP0}	24	24	24	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}	504	472	456	mA
Precharge standby current	I_{DD2N}	264	248	240	mA
Precharge standby ODT current	I_{DD2NT}	352	320	304	mA
Precharge power-down current	I_{DD2P}	176	176	176	mA
Precharge quiet standby current	I_{DD2Q}	208	208	208	mA
Active standby current	I_{DD3N}	344	312	296	mA
Active standby I_{PP} current	I_{PP3N}	24	24	24	mA
Active power-down current	I_{DD3P}	264	248	240	mA
Burst read current	I_{DD4R}	1424	1248	1160	mA
Burst write current	I_{DD4W}	1200	1056	984	mA
Burst refresh current (1x REF)	I_{DD5R}	400	384	376	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}	40	40	40	mA
Self refresh current: Normal temperature range (0°C to +85°C)	I_{DD6N}	272	272	272	mA
Self refresh current: Extended temperature range (0°C to +95°C)	I_{DD6E}	464	464	464	mA
Self refresh current: Reduced temperature range (0°C to +45°C)	I_{DD6R}	168	168	168	mA
Auto self refresh current (25°C)	I_{DD6A}	68.8	68.8	68.8	mA
Auto self refresh current (45°C)	I_{DD6A}	168	168	168	mA
Auto self refresh current (75°C)	I_{DD6A}	248	248	248	mA
Auto self refresh current (95°C)	I_{DD6A}	464	464	464	mA
Auto self refresh I_{PP} current	I_{PP6X}	40	40	40	mA
Bank interleave read current	I_{DD7}	1520	1440	1400	mA
Bank interleave read I_{PP} current	I_{PP7}	104	104	104	mA
Maximum power-down current	I_{DD8}	144	144	144	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 16: DDR4 I_{DD} Specifications and Conditions – 8GB (Die Revision H)

Values are for the MT40A1G8 DDR4 SDRAM only and are computed from values specified in the 8Gb (1 Gig x 8) component data sheet

Parameter	Symbol	2666	2400	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}	480	440	mA
One bank ACTIVATE-PRECHARGE, Word Line Boost, I_{PP} current	I_{PP0}	24	24	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}	584	544	mA
Precharge standby current	I_{DD2N}	336	312	mA
Precharge standby ODT current	I_{DD2NT}	384	344	mA
Precharge power-down current	I_{DD2P}	216	216	mA
Precharge quiet standby current	I_{DD2Q}	288	272	mA
Active standby current	I_{DD3N}	392	376	mA
Active standby I_{PP} current	I_{PP3N}	36	36	mA
Active power-down current	I_{DD3P}	312	288	mA
Burst read current	I_{DD4R}	1392	1176	mA
Burst write current	I_{DD4W}	1736	1448	mA
Burst refresh current (1x REF)	I_{DD5R}	408	392	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}	44	44	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}	288	288	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}	392	384	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}	208	208	mA
Auto self refresh current (25°C)	I_{DD6A}	120	120	mA
Auto self refresh current (45°C)	I_{DD6A}	208	208	mA
Auto self refresh current (75°C)	I_{DD6A}	288	288	mA
Auto self refresh I_{PP} current	I_{PP6X}	40	40	mA
Bank interleave read current	I_{DD7}	1920	1824	mA
Bank interleave read I_{PP} current	I_{PP7}	128	128	mA
Maximum power-down current	I_{DD8}	168	168	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 17: DDR4 I_{DD} Specifications and Conditions – 8GB (Die Revision J)

Values are for the MT40A1G8 DDR4 SDRAM only and are computed from values specified in the 8Gb (1 Gig x 8) component data sheet

Parameter	Symbol	3200	2666	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}	352	328	mA
One bank ACTIVATE-PRECHARGE, Word Line Boost, I_{PP} current	I_{PP0}	24	24	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}	480	448	mA
Precharge standby current	I_{DD2N}	248	240	mA
Precharge standby ODT current	I_{DD2NT}	336	304	mA
Precharge power-down current	I_{DD2P}	176	176	mA
Precharge quiet standby current	I_{DD2Q}	208	208	mA
Active standby current	I_{DD3N}	344	312	mA
Active standby I_{PP} current	I_{PP3N}	24	24	mA
Active power-down current	I_{DD3P}	264	248	mA
Burst read current	I_{DD4R}	1352	1184	mA
Burst write current	I_{DD4W}	1136	1000	mA
Burst refresh current (1x REF)	I_{DD5R}	376	360	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}	40	40	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}	256	256	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}	440	440	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}	160	160	mA
Auto self refresh current (25°C)	I_{DD6A}	65.6	65.6	mA
Auto self refresh current (45°C)	I_{DD6A}	160	160	mA
Auto self refresh current (75°C)	I_{DD6A}	240	240	mA
Auto self refresh current (95°C)	I_{DD6A}	440	440	mA
Auto self refresh I_{PP} current	I_{PP6X}	40	40	mA
Bank interleave read current	I_{DD7}	1440	1368	mA
Bank interleave read I_{PP} current	I_{PP7}	104	80	mA
Maximum power-down current	I_{DD8}	144	144	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Table 18: DDR4 I_{DD} Specifications and Conditions – 8GB (Die Revision R)

Values are for the MT40A1G8 DDR4 SDRAM only and are computed from values specified in the 8Gb (1 Gig x 8) component data sheet

Parameter	Symbol	3200	2666	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}	384	352	mA
One bank ACTIVATE-PRECHARGE, Word Line Boost, I_{PP} current	I_{PP0}	32	32	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}	440	408	mA
Precharge standby current	I_{DD2N}	304	288	mA
Precharge standby ODT current	I_{DD2NT}	328	296	mA
Precharge power-down current	I_{DD2P}	240	240	mA
Precharge quiet standby current	I_{DD2Q}	272	272	mA
Active standby current	I_{DD3N}	344	312	mA
Active standby I_{PP} current	I_{PP3N}	24	24	mA
Active power-down current	I_{DD3P}	264	248	mA
Burst read current	I_{DD4R}	984	840	mA
Burst write current	I_{DD4W}	848	728	mA
Distributed refresh current (1x REF)	I_{DD5R}	376	360	mA
Distributed refresh I_{PP} current (1x REF)	I_{PP5R}	40	40	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}	256	256	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}	416	416	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}	152	152	mA
Auto self refresh current (25°C)	I_{DD6A}	64	64	mA
Auto self refresh current (45°C)	I_{DD6A}	152	152	mA
Auto self refresh current (75°C)	I_{DD6A}	232	232	mA
Auto self refresh current (95°C)	I_{DD6A}	416	416	mA
Auto self refresh I_{PP} current	I_{PP6X}	40	40	mA
Bank interleave read current	I_{DD7}	1240	1160	mA
Bank interleave read I_{PP} current	I_{PP7}	64	64	mA
Maximum power-down current	I_{DD8}	192	192	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

SPD EEPROM Operating Conditions

For the latest SPD data, refer to Micron's SPD page: micron.com/spd.

Table 19: SPD EEPROM DC Operating Conditions

Parameter/Condition	Symbol	Min	Typ	Max	Units
Supply voltage	V_{DDSPD}	1.7	2.5	3.6	V
Input low voltage: logic 0; All inputs	V_{IL}	–0.5	–	V_{DDSPD} × 0.3	V
Input high voltage: logic 1; All inputs	V_{IH}	V_{DDSPD} × 0.7	–	V_{DDSPD} + 0.5	V
Output low voltage: 3mA sink current V_{DDSPD} > 2V	V_{OL}	–	–	0.4	V
Input leakage current: (SCL, SDA) V_{IN} = V_{DDSPD} or V_{SSSPD}	I_{LI}	–	–	±5	µA
Output leakage current: V_{OUT} = V_{DDSPD} or V_{SSSPD}, SDA in High-Z	I_{LO}	–	–	±5	µA

Notes:
1. Table is provided as a general reference. Consult JEDEC JC-42.4 EE1004 device specifications for complete details.
2. Operation at ^{t}SCL > 100 kHz may require V_{DDSPD} ≤ 2.2.
3. All voltages referenced to V_{DDSPD}.

Table 20: SPD EEPROM AC Operating Conditions

Parameter/Condition	Symbol	Min	Max	Units
Clock frequency	^{t}SCL	10	1000	kHz
Clock pulse width HIGH time	^{t}HIGH	260	–	ns
Clock pulse width LOW time	^{t}LOW	500	–	ns
Detect clock LOW timeout	^{t}TIMEOUT	25	35	ms
SDA rise time	^{t}R	–	120	ns
SDA fall time	^{t}F	–	120	ns
Data-in setup time	^{t}SU:DAT	50	–	ns
Data-in hold time	^{t}HD:DI	0	–	ns
Data out hold time	^{t}HD:DAT	0	350	ns
Start condition setup time	^{t}SU:STA	260	–	ns
Start condition hold time	^{t}HD:STA	260	–	ns
Stop condition setup time	^{t}SU:STO	260	–	ns
Time the bus must be free before a new transition can start	^{t}BUF	500	–	ns
Write time	^{t}W	–	5	ms
Warm power cycle time off	^{t}POFF	1	–	ms
Time from power-on to first command	^{t}INIT	10	–	ms

Notes:
1. Table is provided as a general reference. Consult JEDEC JC-42.4 EE1004 device specifications for complete details.
2. Operation at ^{t}SCL > 100 kHz may require V_{DDSPD} ≤ 2.2.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.

Module Dimensions

Figure 3: 260-Pin DDR4 SODIMM

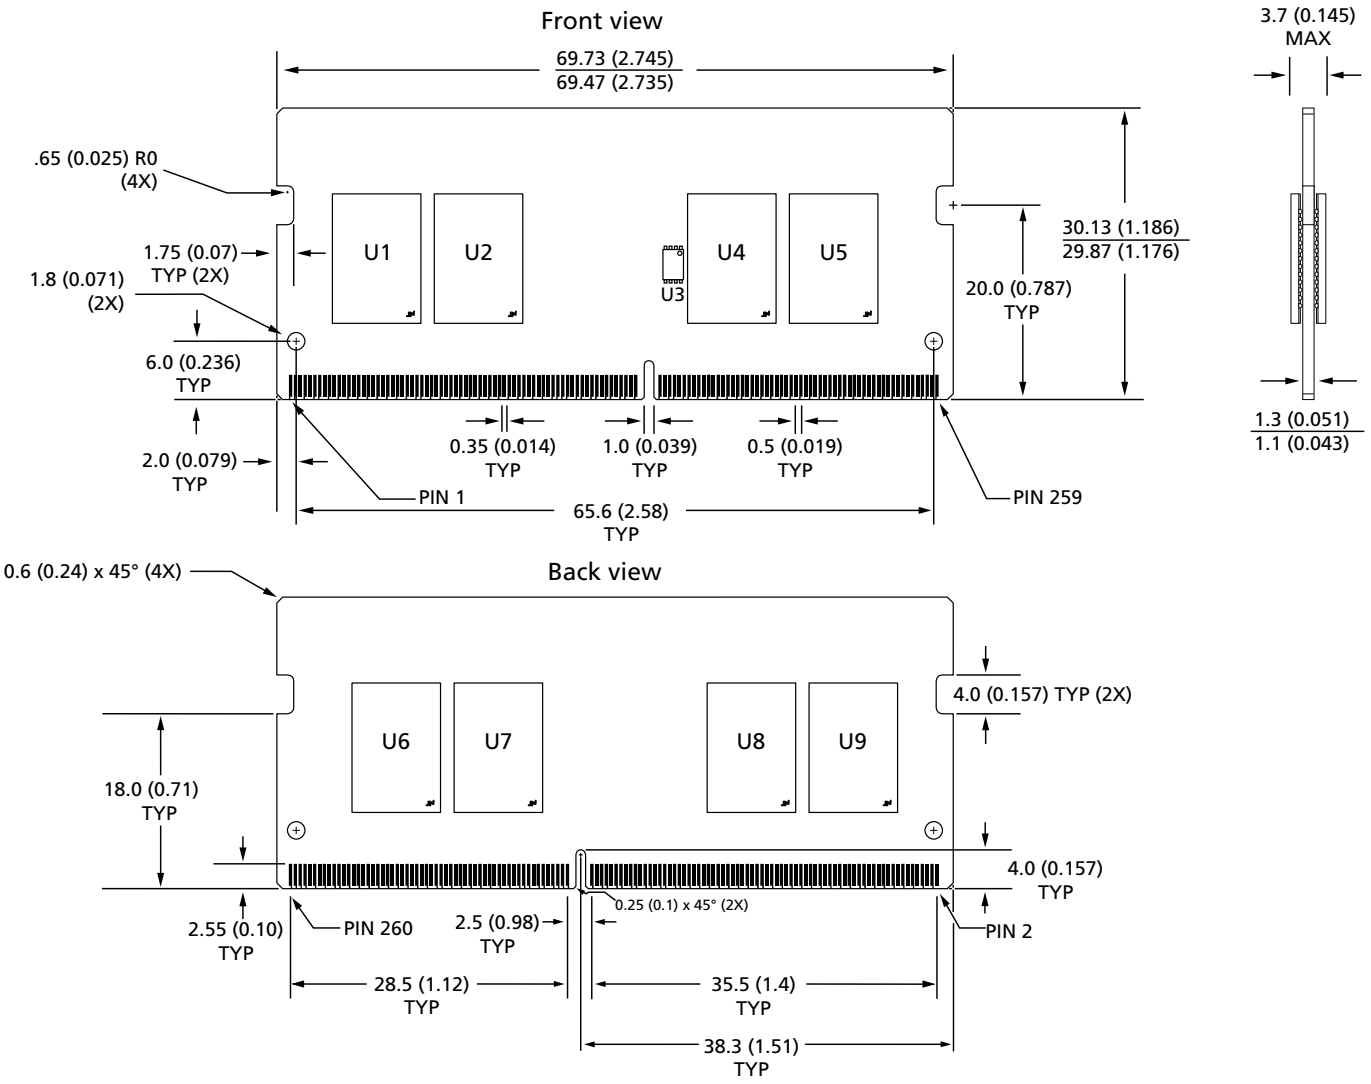

Notes:
1. All dimensions are in millimeters (inches); MAX/MIN or typical (TYP) where noted.
2. Tolerance on all dimensions ±0.15mm unless otherwise specified.
3. The dimensional diagram is for reference only.

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-4000
www.micron.com/products/support Sales inquiries: 800-932-4992
Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.
This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2015 Micron Technology, Inc. All rights reserved.