DDR4 SDRAM RDIMM

MTA36ASF4G72PZ – 32GB

Features

- DDR4 functionality and operations supported as defined in the component data sheet
- 288-pin, registered dual in-line memory module (RDIMM)
- Fast data transfer rates: PC4-3200, PC4-2933, PC4-2666, or PC4-2400
- 32GB (4 Gig x 72)
- V_{DD} = 1.20V (NOM)
- V_{PP} = 2.5V (NOM)
- V_{DDSPD} = 2.5V (NOM)
- Supports ECC error detection and correction
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Low-power auto self refresh (LPASR)
- On-die V_{REFDQ} generation and calibration
- Dual-rank
- On-board I^2C temperature sensor with integrated serial presence-detect (SPD) EEPROM
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Gold edge contacts
- Halogen-free
- Fly-by topology
- Terminated control, command, and address bus

Figure 1: 288-Pin RDIMM (R/C-B1)

Module height: 31.25mm (1.23in)


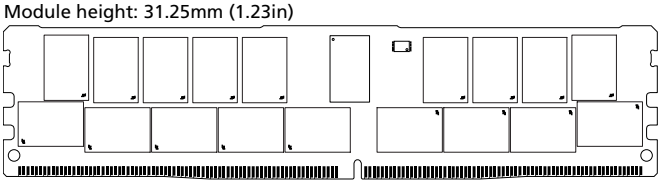


Figure 2: 288-Pin RDIMM (R/C-B2)

Module height: 31.25mm (1.23in)

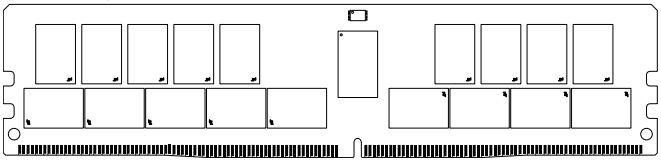

Options	Marking
• Operating temperature	
– Commercial (0°C ≤ T_{OPER} ≤ 95°C)	None
• Package	
– 288-pin DIMM (halogen-free)	Z
• Frequency/CAS latency	
– 0.62ns @ CL = 22 (DDR4-3200)	-3G2
– 0.682ns @ CL = 21 (DDR4-2933)	-2G9
– 0.75ns @ CL = 19 (DDR4-2666)	-2G6
– 0.83ns @ CL = 17 (DDR4-2400)	-2G3

Table 1: Key Timing Parameters

Speed Grade	PC4-	Data Rate (MT/s) CL = 24	22	21	20\ 19	18\ 17	16\ 15	14\ 13	12\ 11	10\ 9	^tRCD ns	^tRP ns	^tRC ns
-3G2	3200	3200, 2933	3200, 2933	2933	2666\ 2666	2400\ 2400	2133\ 2133	1866\ 1866	1600\ 1600	1333\ –	13.75	13.75	45.75
-2G9	2933	–	2933	2933	2666\ 2666	2400\ 2400	2133\ 2133	1866\ 1866	1600\ 1600	1333\ –	14.32 (13.75)[1]	14.32 (13.75)[1]	46.32 (45.75)[1]
-2G6	2666	–	–	–	2666\ 2666	2400\ 2400	2133\ 2133	1866\ 1866	1600\ 1600	1333\ –	14.25 (13.75)[1]	14.25 (13.75)[1]	46.25 (45.75)[1]

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.
Products and specifications discussed herein are subject to change by Micron without notice.

Table 1: Key Timing Parameters (Continued)

Speed Grade	PC4-	Data Rate (MT/s) CL = 24	22	21	20\ 19	18\ 17	16\ 15	14\ 13	12\ 11	10\ 9	^{t}RCD ns	^{t}RP ns	^{t}RC ns
-2G3	2400	–	–	–	–	2400\ 2400	2133\ 2133	1866\ 1866	1600\ 1600	1333\ –	14.16 (13.75)[1]	14.16 (13.75)[1]	46.16 (45.75)[1]
-2G1	2133	–	–	–	–	–	2133\ 2133	1866\ 1866	1600\ 1600	1333\ 1333	14.06 (13.5)[1]	14.06 (13.5)[1]	47.06 (46.5)[1]

Note: 1. Down-bin timing, refer to component data sheet Speed Bin Tables for details.

Table 2: Addressing

Parameter	32GB
Row address	128K A[16:0]
Column address	1K A[9:0]
Device bank group address	4 BG[1:0]
Device bank address per group	4 BA[1:0]
Device configuration	8Gb (2 Gig x 4), 16 banks
Module rank address	2 CS_n[1:0]

Table 3: Part Numbers and Timing Parameters – 32GB Modules

Base device: MT40A2G4,[1] 8Gb DDR4 SDRAM

Part Number[2]	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (CL-$_{n}$RCD-$_{n}$RP)
MTA36ASF4G72PZ-3G2__	32GB	4 Gig x 72	25.6 GB/s	0.62ns/3200 MT/s	22-22-22
MTA36ASF4G72PZ-2G9__	32GB	4 Gig x 72	23.47 GB/s	0.682ns/2933 MT/s	21-21-21
MTA36ASF4G72PZ-2G6__	32GB	4 Gig x 72	21.3 GB/s	0.75ns/2666 MT/s	19-19-19
MTA36ASF4G72PZ-2G3__	32GB	4 Gig x 72	19.2 GB/s	0.83ns/2400 MT/s	17-17-17

Notes: 1. The data sheet for the base device can be found on micron.com.
2. All part numbers end with a two-place code (not shown) that designates component and PCB revisions. Consult factory for current revision codes. Example: MTA36ASF4G72PZ-3G2R1.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Important Notes and Warnings

Micron Technology, Inc. ("Micron") reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions. This document supersedes and replaces all information supplied prior to the publication hereof. You may not rely on any information set forth in this document if you obtain the product described herein from any unauthorized distributor or other source not authorized by Micron.

Automotive Applications. Products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets. Distributor and customer/distributor shall assume the sole risk and liability for and shall indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting directly or indirectly from any use of non-automotive-grade products in automotive applications. Customer/distributor shall ensure that the terms and conditions of sale between customer/distributor and any customer of distributor/customer (1) state that Micron products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets and (2) require such customer of distributor/customer to indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting from any use of non-automotive-grade products in automotive applications.

Critical Applications. Products are not authorized for use in applications in which failure of the Micron component could result, directly or indirectly in death, personal injury, or severe property or environmental damage ("Critical Applications"). Customer must protect against death, personal injury, and severe property and environmental damage by incorporating safety design measures into customer's applications to ensure that failure of the Micron component will not result in such harms. Should customer or distributor purchase, use, or sell any Micron component for any critical application, customer and distributor shall indemnify and hold harmless Micron and its subsidiaries, subcontractors, and affiliates and the directors, officers, and employees of each against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, or death arising in any way out of such critical application, whether or not Micron or its subsidiaries, subcontractors, or affiliates were negligent in the design, manufacture, or warning of the Micron product.

Customer Responsibility. Customers are responsible for the design, manufacture, and operation of their systems, applications, and products using Micron products. ALL SEMICONDUCTOR PRODUCTS HAVE INHERENT FAILURE RATES AND LIMITED USEFUL LIVES. IT IS THE CUSTOMER'S SOLE RESPONSIBILITY TO DETERMINE WHETHER THE MICRON PRODUCT IS SUITABLE AND FIT FOR THE CUSTOMER'S SYSTEM, APPLICATION, OR PRODUCT. Customers must ensure that adequate design, manufacturing, and operating safeguards are included in customer's applications and products to eliminate the risk that personal injury, death, or severe property or environmental damages will result from failure of any semiconductor component.

Limited Warranty. In no event shall Micron be liable for any indirect, incidental, punitive, special or consequential damages (including without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort, warranty, breach of contract or other legal theory, unless explicitly stated in a written agreement executed by Micron's duly authorized representative.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Pin Assignments

The pin assignment table below is a comprehensive list of all possible pin assignments for DDR4 RDIMM modules. See the Functional Block Diagram for pins specific to this module.

Table 4: Pin Assignments

288-Pin DDR4 RDIMM Front								288-Pin DDR4 RDIMM Back							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
1	NC	37	V_{SS}	73	V_{DD}	109	V_{SS}	145	NC	181	DQ29	217	V_{DD}	253	DQ41
2	V_{SS}	38	DQ24	74	CK0_t	110	DQS14_t/ TDQS14_t	146	V_{REFCA}	182	V_{SS}	218	CK1_t	254	V_{SS}
3	DQ4	39	V_{SS}	75	CK0_c	111	DQS14_c/ TDQS14_c	147	V_{SS}	183	DQ25	219	CK1_c	255	DQS5_c
4	V_{SS}	40	DQS12_t/ TDQS12_t	76	V_{DD}	112	V_{SS}	148	DQ5	184	V_{SS}	220	V_{DD}	256	DQS5_t
5	DQ0	41	DQS12_c/ TDQS12_c	77	V_{TT}	113	DQ46	149	V_{SS}	185	DQS3_c	221	V_{TT}	257	V_{SS}
6	V_{SS}	42	V_{SS}	78	EVENT_n	114	V_{SS}	150	DQ1	186	DQS3_t	222	PARITY	258	DQ47
7	DQS9_t/ TDQS9_t	43	DQ30	79	A0	115	DQ42	151	V_{SS}	187	V_{SS}	223	V_{DD}	259	V_{SS}
8	DQS09_c/ TDQS9_c	44	V_{SS}	80	V_{DD}	116	V_{SS}	152	DQS0_c	188	DQ31	224	BA1	260	DQ43
9	V_{SS}	45	DQ26	81	BA0	117	DQ52	153	DQS0_t	189	V_{SS}	225	A10/ AP	261	V_{SS}
10	DQ6	46	V_{SS}	82	RAS_n/ A16	118	V_{SS}	154	V_{SS}	190	DQ27	226	V_{DD}	262	DQ53
11	V_{SS}	47	CB4	83	V_{DD}	119	DQ48	155	DQ7	191	V_{SS}	227	NC	263	V_{SS}
12	DQ2	48	V_{SS}	84	CS0_n	120	V_{SS}	156	V_{SS}	192	CB5	228	WE_n/ A14	264	DQ49
13	V_{SS}	49	CB0	85	V_{DD}	121	DQS15_t/ TDQS15_t	157	DQ3	193	V_{SS}	229	V_{DD}	265	V_{SS}
14	DQ12	50	V_{SS}	86	CAS_n/ A15	122	DQS15_c/ TDQS15_c	158	V_{SS}	194	CB1	230	NC	266	DQS6_c
15	V_{SS}	51	DQS17_t/ TDQS17_t	87	ODT0	123	V_{SS}	159	DQ13	195	V_{SS}	231	V_{DD}	267	DQS6_t
16	DQ8	52	DQS17_c/ TDQS17_c	88	V_{DD}	124	DQ54	160	V_{SS}	196	DQS8_c	232	A13	268	V_{SS}
17	V_{SS}	53	V_{SS}	89	CS1_n/ NC	125	V_{SS}	161	DQ9	197	DQS8_t	233	V_{DD}	269	DQ55
18	DQS10_t/ TDQS10_t	54	CB6	90	V_{DD}	126	DQ50	162	V_{SS}	198	V_{SS}	234	A17	270	V_{SS}
19	DQS10_c/ TDQS10_c	55	V_{SS}	91	ODT1/ NC	127	V_{SS}	163	DQS1_c	199	CB7	235	NC/ C2	271	DQ51
20	V_{SS}	56	CB2	92	V_{DD}	128	DQ60	164	DQS1_t	200	V_{SS}	236	V_{DD}	272	V_{SS}
21	DQ14	57	V_{SS}	93	CS2_n/ C0	129	V_{SS}	165	V_{SS}	201	CB3	237	CS3_n/ C1, NC	273	DQ61
22	V_{SS}	58	RESET_n	94	V_{SS}	130	DQ56	166	DQ15	202	V_{SS}	238	SA2	274	V_{SS}
23	DQ10	59	V_{DD}	95	DQ36	131	V_{SS}	167	V_{SS}	203	CKE1/ NC	239	V_{SS}	275	DQ57
24	V_{SS}	60	CKE0	96	V_{SS}	132	DQS16_t/ TDQS16_t	168	DQ11	204	V_{DD}	240	DQ37	276	V_{SS}

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 4: Pin Assignments (Continued)

288-Pin DDR4 RDIMM Front								288-Pin DDR4 RDIMM Back							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
25	DQ20	61	V_{DD}	97	DQ32	133	DQS16_c/ TDQS16_c	169	V_{SS}	205	NC	241	V_{SS}	277	DQS7_c
26	V_{SS}	62	ACT_n	98	V_{SS}	134	V_{SS}	170	DQ21	206	V_{DD}	242	DQ33	278	DQS7_t
27	DQ16	63	BG0	99	DQS13_t/ TDQ13_t	135	DQ62	171	V_{SS}	207	BG1	243	V_{SS}	279	V_{SS}
28	V_{SS}	64	V_{DD}	100	DQS13_c/ TDQS13_c	136	V_{SS}	172	DQ17	208	ALERT_n	244	DQS4_c	280	DQ63
29	DQS11_t/ TDQS11_t	65	A12/BC_n	101	V_{SS}	137	DQ58	173	V_{SS}	209	V_{DD}	245	DQS4_t	281	V_{SS}
30	DQS11_c/ TDQS11_c	66	A9	102	DQ38	138	V_{SS}	174	DQS2_c	210	A11	246	V_{SS}	282	DQ59
31	V_{SS}	67	V_{DD}	103	V_{SS}	139	SA0	175	DQS2_t	211	A7	247	DQ39	283	V_{SS}
32	DQ22	68	A8	104	DQ34	140	SA1	176	V_{SS}	212	V_{DD}	248	V_{SS}	284	V_{DDSPD}
33	V_{SS}	69	A6	105	V_{SS}	141	SCL	177	DQ23	213	A5	249	DQ35	285	SDA
34	DQ18	70	V_{DD}	106	DQ44	142	V_{PP}	178	V_{SS}	214	A4	250	V_{SS}	286	V_{PP}
35	V_{SS}	71	A3	107	V_{SS}	143	V_{PP}	179	DQ19	215	V_{DD}	251	DQ45	287	V_{PP}
36	DQ28	72	A1	108	DQ40	144	NC	180	V_{SS}	216	A2	252	V_{SS}	288	V_{PP}

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Pin Descriptions

The pin description table below is a comprehensive list of all possible pins for DDR4 modules. All pins listed may not be supported on this module. See the Functional Block Diagram located in the module MPN data sheet addendum for pins specific to the module.

Table 5: Pin Descriptions

Symbol	Type	Description
Ax	Input	**Address inputs:** Provide the row address for ACTIVATE commands and the column address for READ/WRITE commands in order to select one location out of the memory array in the respective bank (A10/AP, A12/BC_n, WE_n/A14, CAS_n/A15, and RAS_n/A16 have additional functions; see individual entries in this table). The address inputs also provide the op-code during the MODE REGISTER SET command. A17 is only defined for x4 SDRAM.
A10/AP	Input	**Auto precharge:** A10 is sampled during READ and WRITE commands to determine whether an auto precharge should be performed on the accessed bank after a READ or WRITE operation (HIGH = auto precharge; LOW = no auto precharge). A10 is sampled during a PRECHARGE command to determine whether the precharge applies to one bank (A10 LOW) or all banks (A10 HIGH). If only one bank is to be precharged, the bank is selected by the bank group and bank addresses.
A12/BC_n	Input	**Burst chop:** A12/BC_n is sampled during READ and WRITE commands to determine if burst chop (on-the-fly) will be performed (HIGH = no burst chop; LOW = burst chopped). See Command Truth Table in the DDR4 component data sheet.
ACT_n	Input	**Command input:** ACT_n defines the ACTIVATE command being entered along with CS_n. The input into RAS_n/A16, CAS_n/A15, and WE_n/A14 are considered as row address A16, A15, and A14. See Command Truth Table.
BAx	Input	**Bank address inputs:** Define the bank (with a bank group) to which an ACTIVATE, READ, WRITE, or PRECHARGE command is being applied. Also determine which mode register is to be accessed during a MODE REGISTER SET command.
BGx	Input	**Bank group address inputs:** Define the bank group to which a REFRESH, ACTIVATE, READ, WRITE, or PRECHARGE command is being applied. Also determine which mode register is to be accessed during a MODE REGISTER SET command. BG[1:0] are used in the x4 and x8 configurations. x16-based SDRAM only has BG0.
C0, C1, C2 (RDIMM/LRDIMM only)	Input	**Chip ID:** These inputs are used only when devices are stacked; that is, 2H, 4H, and 8H stacks for x4 and x8 configurations using through-silicon vias (TSVs). These pins are not used in the x16 configuration. Some DDR4 modules support a traditional DDP package, which uses CS1_n, CKE1, and ODT1 to control the second die. All other stack configurations, such as a 4H or 8H, are assumed to be single-load (master/slave) type configurations where C0, C1, and C2 are used as chip ID selects in conjunction with a single CS_n, CKE, and ODT. Chip ID is considered part of the command code.
CKx_t CKx_c	Input	**Clock:** Differential clock inputs. All address, command, and control input signals are sampled on the crossing of the positive edge of CK_t and the negative edge of CK_c.
CKEx	Input	**Clock enable:** CKE HIGH activates and CKE LOW deactivates the internal clock signals, device input buffers, and output drivers. Taking CKE LOW provides PRECHARGE POWER-DOWN and SELF REFRESH operations (all banks idle), or active power-down (row active in any bank). CKE is asynchronous for self refresh exit. After V_{REFCA} has become stable during the power-on and initialization sequence, it must be maintained during all operations (including SELF REFRESH). CKE must be maintained HIGH throughout read and write accesses. Input buffers (excluding CK_t, CK_c, ODT, RESET_n, and CKE) are disabled during power-down. Input buffers (excluding CKE and RESET_n) are disabled during self refresh.
CSx_n	Input	**Chip select:** All commands are masked when CS_n is registered HIGH. CS_n provides external rank selection on systems with multiple ranks. CS_n is considered part of the command code (CS2_n and CS3_n are not used on UDIMMs).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 5: Pin Descriptions (Continued)

Symbol	Type	Description
ODTx	Input	**On-die termination:** ODT (registered HIGH) enables termination resistance internal to the DDR4 SDRAM. When enabled, ODT (R_{TT}) is applied only to each DQ, DQS_t, DQS_c, DM_n/DBI_n/TDQS_t, and TDQS_c signal for x4 and x8 configurations (when the TDQS function is enabled via the mode register). For the x16 configuration, R_{TT} is applied to each DQ, DQSU_t, DQSU_c, DQSL_t, DQSL_c, UDM_n, and LDM_n signal. The ODT pin will be ignored if the mode registers are programmed to disable R_{TT}.
PARITY	Input	**Parity for command and address:** This function can be enabled or disabled via the mode register. When enabled in MR5, the DRAM calculates parity with ACT_n, RAS_n/A16, CAS_n/A15, WE_n/A14, BG[1:0], BA[1:0], A[16:0]. Input parity should be maintained at the rising edge of the clock and at the same time as command and address with CS_n LOW.
RAS_n/A16 CAS_n/A15 WE_n/A14	Input	**Command inputs:** RAS_n/A16, CAS_n/A15, and WE_n/A14 (along with CS_n) define the command and/or address being entered and have multiple functions. For example, for activation with ACT_n LOW, these are addresses like A16, A15, and A14, but for a non-activation command with ACT_n HIGH, these are command pins for READ, WRITE, and other commands defined in Command Truth Table.
RESET_n	CMOS Input	**Active LOW asynchronous reset:** Reset is active when RESET_n is LOW and inactive when RESET_n is HIGH. RESET_n must be HIGH during normal operation.
SAx	Input	**Serial address inputs:** Used to configure the temperature sensor/SPD EEPROM address range on the I^2C bus.
SCL	Input	**Serial clock for temperature sensor/SPD EEPROM:** Used to synchronize communication to and from the temperature sensor/SPD EEPROM on the I^2C bus.
DQx, CBx	I/O	**Data input/output and check bit input/output:** Bidirectional data bus. DQ represents DQ[3:0], DQ[7:0], and DQ[15:0] for the x4, x8, and x16 configurations, respectively. If cyclic redundancy checksum (CRC) is enabled via the mode register, the CRC code is added at the end of the data burst. Any one or all of DQ0, DQ1, DQ2, or DQ3 may be used for monitoring of internal V_{REF} level during test via mode register setting MR[4] A[4] = HIGH; training times change when enabled.
DM_n/DBI_n/TDQS_t (DMU_n, DBIU_n), (DML_n/DBIl_n)	I/O	**Input data mask and data bus inversion:** DM_n is an input mask signal for write data. Input data is masked when DM_n is sampled LOW coincident with that input data during a write access. DM_n is sampled on both edges of DQS. DM is multiplexed with the DBI function by the mode register A10, A11, and A12 settings in MR5. For a x8 device, the function of DM or TDQS is enabled by the mode register A11 setting in MR1. DBI_n is an input/output identifying whether to store/output the true or inverted data. If DBI_n is LOW, the data will be stored/output after inversion inside the DDR4 device and not inverted if DBI_n is HIGH. TDQS is only supported in x8 SDRAM configurations (TDQS is not valid for UDIMMs).
SDA	I/O	**Serial Data:** Bidirectional signal used to transfer data in or out of the EEPROM or EEPROM/TS combo device.
DQS_t DQS_c DQSU_t DQSU_c DQSL_t DQSL_c	I/O	**Data strobe:** Output with read data, input with write data. Edge-aligned with read data, centered-aligned with write data. For x16 configurations, DQSL corresponds to the data on DQ[7:0], and DQSU corresponds to the data on DQ[15:8]. For the x4 and x8 configurations, DQS corresponds to the data on DQ[3:0] and DQ[7:0], respectively. DDR4 SDRAM supports a differential data strobe only and does not support a single-ended data strobe.
ALERT_n	Output	**Alert output:** Possesses functions such as CRC error flag and command and address parity error flag as output signal. If a CRC error occurs, ALERT_n goes LOW for the period time interval and returns HIGH. If an error occurs during a command address parity check, ALERT_n goes LOW until the on-going DRAM internal recovery transaction is complete. During connectivity test mode, this pin functions as an input. Use of this signal is system-dependent. If not connected as signal, ALERT_n pin must be connected to V_{DD} on DIMMs.
EVENT_n	Output	**Temperature event:** The EVENT_n pin is asserted by the temperature sensor when critical temperature thresholds have been exceeded. This pin has no function (NF) on modules without temperature sensors.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 5: Pin Descriptions (Continued)

Symbol	Type	Description
TDQS_t TDQS_c (x8 DRAM-based RDIMM only)	Output	**Termination data strobe:** When enabled via the mode register, the DRAM device enables the same R_{TT} termination resistance on TDQS_t and TDQS_c that is applied to DQS_t and DQS_c. When the TDQS function is disabled via the mode register, the DM/TDQS_t pin provides the data mask (DM) function, and the TDQS_c pin is not used. The TDQS function must be disabled in the mode register for both the x4 and x16 configurations. The DM function is supported only in x8 and x16 configurations. DM, DBI, and TDQS are a shared pin and are enabled/disabled by mode register settings. For more information about TDQS, see the DDR4 DRAM component data sheet (TDQS_t and TDQS_c are not valid for UDIMMs).
V_{DD}	Supply	**Module power supply:** 1.2V (TYP).
V_{PP}	Supply	**DRAM activating power supply:** 2.5V –0.125V/+0.250V.
V_{REFCA}	Supply	Reference voltage for control, command, and address pins.
V_{SS}	Supply	Ground.
V_{TT}	Supply	Power supply for termination of address, command, and control $V_{DD}/2$.
V_{DDSPD}	Supply	Power supply used to power the I^2C bus for SPD.
RFU	–	Reserved for future use.
NC	–	**No connect:** No internal electrical connection is present.
NF	–	**No function:** May have internal connection present, but has no function.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

DQ Map

Table 6: Component-to-Module DQ Map Front (R/C-B1, PCB 1798)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U1	0	7	155	U2	0	15	166
	1	5	148		1	13	159
	2	6	10		2	14	21
	3	4	3		3	12	14
U3	0	23	177	U4	0	31	188
	1	21	170		1	29	181
	2	22	32		2	30	43
	3	20	25		3	28	36
U5	0	CB7	199	U8	0	39	247
	1	CB5	192		1	37	240
	2	CB6	54		2	38	102
	3	CB4	47		3	36	95
U9	0	47	258	U10	0	55	269
	1	45	251		1	53	262
	2	46	113		2	54	124
	3	44	106		3	52	117
U11	0	63	280	U12	0	2	12
	1	61	273		1	0	5
	2	62	135		2	3	157
	3	60	128		3	1	150
U13	0	8	16	U14	0	19	179
	1	10	23		1	16	27
	2	9	161		2	18	34
	3	11	168		3	17	172
U15	0	24	38	U16	0	CB0	49
	1	26	45		1	CB3	201
	2	25	183		2	CB1	194
	3	27	190		3	CB2	56
U17	0	32	97	U18	0	40	108
	1	34	104		1	42	115
	2	33	242		2	41	253
	3	35	249		3	43	260

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 6: Component-to-Module DQ Map Front (R/C-B1, PCB 1798) (Continued)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U19	0	51	271	U20	0	58	137
	1	49	264		1	57	275
	2	50	126		2	59	282
	3	48	119		3	56	130

Table 7: Component-to-Module DQ Map Back (R/C-B1, PCB 1798)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U21	0	61	273	U22	0	53	262
	1	63	280		1	55	269
	2	60	128		2	52	117
	3	62	135		3	54	124
U23	0	45	251	U24	0	37	240
	1	47	258		1	39	247
	2	44	106		2	36	95
	3	46	113		3	38	102
U25	0	CB5	192	U26	0	29	181
	1	CB7	199		1	31	188
	2	CB4	47		2	28	36
	3	CB6	54		3	30	43
U27	0	21	170	U28	0	13	159
	1	23	177		1	15	166
	2	20	25		2	12	14
	3	22	32		3	14	21
U29	0	5	148	U30	0	57	275
	1	7	155		1	58	137
	2	4	3		2	56	130
	3	6	10		3	59	282
U31	0	49	264	U32	0	42	115
	1	51	271		1	40	108
	2	48	119		2	43	260
	3	50	126		3	41	253

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 7: Component-to-Module DQ Map Back (R/C-B1, PCB 1798) (Continued)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U33	0	34	104	U34	0	CB3	201
	1	32	97		1	CB0	49
	2	35	249		2	CB2	56
	3	33	242		3	CB1	194
U35	0	26	45	U36	0	16	27
	1	24	38		1	19	179
	2	27	190		2	17	172
	3	25	183		3	18	34
U37	0	10	23	U38	0	0	5
	1	8	16		1	2	12
	2	11	168		2	1	150
	3	9	161		3	3	157

Table 8: Component-to-Module DQ Map Front (R/C-B2, PCBs 1971, 2436, 2615, or 2893)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U2	0	7	155	U3	0	15	166
	1	5	148		1	13	159
	2	6	10		2	14	21
	3	4	3		3	12	14
U4	0	23	177	U5	0	31	188
	1	21	170		1	29	181
	2	22	32		2	30	43
	3	20	25		3	28	36
U6	0	CB7	199	U8	0	39	247
	1	CB5	192		1	37	240
	2	CB6	54		2	38	102
	3	CB4	47		3	36	95
U9	0	47	258	U10	0	55	269
	1	45	251		1	53	262
	2	46	113		2	54	124
	3	44	106		3	52	117

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 8: Component-to-Module DQ Map Front (R/C-B2, PCBs 1971, 2436, 2615, or 2893) (Continued)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U11	0	63	280	U12	0	3	157
	1	61	273		1	1	150
	2	62	135		2	2	12
	3	60	128		3	0	5
U13	0	10	23	U14	0	16	27
	1	9	161		1	18	34
	2	11	168		2	17	172
	3	8	16		3	19	179
U15	0	24	38	U16	0	CB0	49
	1	26	45		1	CB2	56
	2	25	183		2	CB1	194
	3	27	190		3	CB3	201
U17	0	32	97	U18	0	41	253
	1	34	104		1	42	115
	2	33	242		2	40	108
	3	35	249		3	43	260
U19	0	51	271	U20	0	59	282
	1	49	264		1	57	275
	2	50	126		2	58	137
	3	48	119		3	56	130

Table 9: Component-to-Module DQ Map Back (R/C-B2, PCBs 1971, 2436, 2615, or 2893)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U21	0	61	273	U22	0	53	262
	1	63	280		1	55	269
	2	60	128		2	52	117
	3	62	135		3	54	124
U23	0	45	251	U24	0	37	240
	1	47	258		1	39	247
	2	44	106		2	36	95
	3	46	113		3	38	102

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.


Table 9: Component-to-Module DQ Map Back (R/C-B2, PCBs 1971, 2436, 2615, or 2893) (Continued)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U25	0	CB5	192	U26	0	29	181
	1	CB7	199		1	31	188
	2	CB4	47		2	28	36
	3	CB6	54		3	30	43
U27	0	21	170	U28	0	13	159
	1	23	177		1	15	166
	2	20	25		2	12	14
	3	22	32		3	14	21
U29	0	5	148	U30	0	57	275
	1	7	155		1	59	282
	2	4	3		2	56	130
	3	6	10		3	58	137
U31	0	49	264	U32	0	42	115
	1	51	271		1	41	253
	2	48	119		2	43	260
	3	50	126		3	40	108
U33	0	34	104	U34	0	CB2	56
	1	32	97		1	CB0	49
	2	35	249		2	CB3	201
	3	33	242		3	CB1	194
U35	0	26	45	U36	0	18	34
	1	24	38		1	16	27
	2	27	190		2	19	179
	3	25	183		3	17	172
U37	0	9	161	U38	0	1	150
	1	10	23		1	3	157
	2	8	16		2	0	5
	3	11	168		3	2	12

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Functional Block Diagram


Figure 3: Functional Block Diagram, R/C-B1 (PCB 1798)

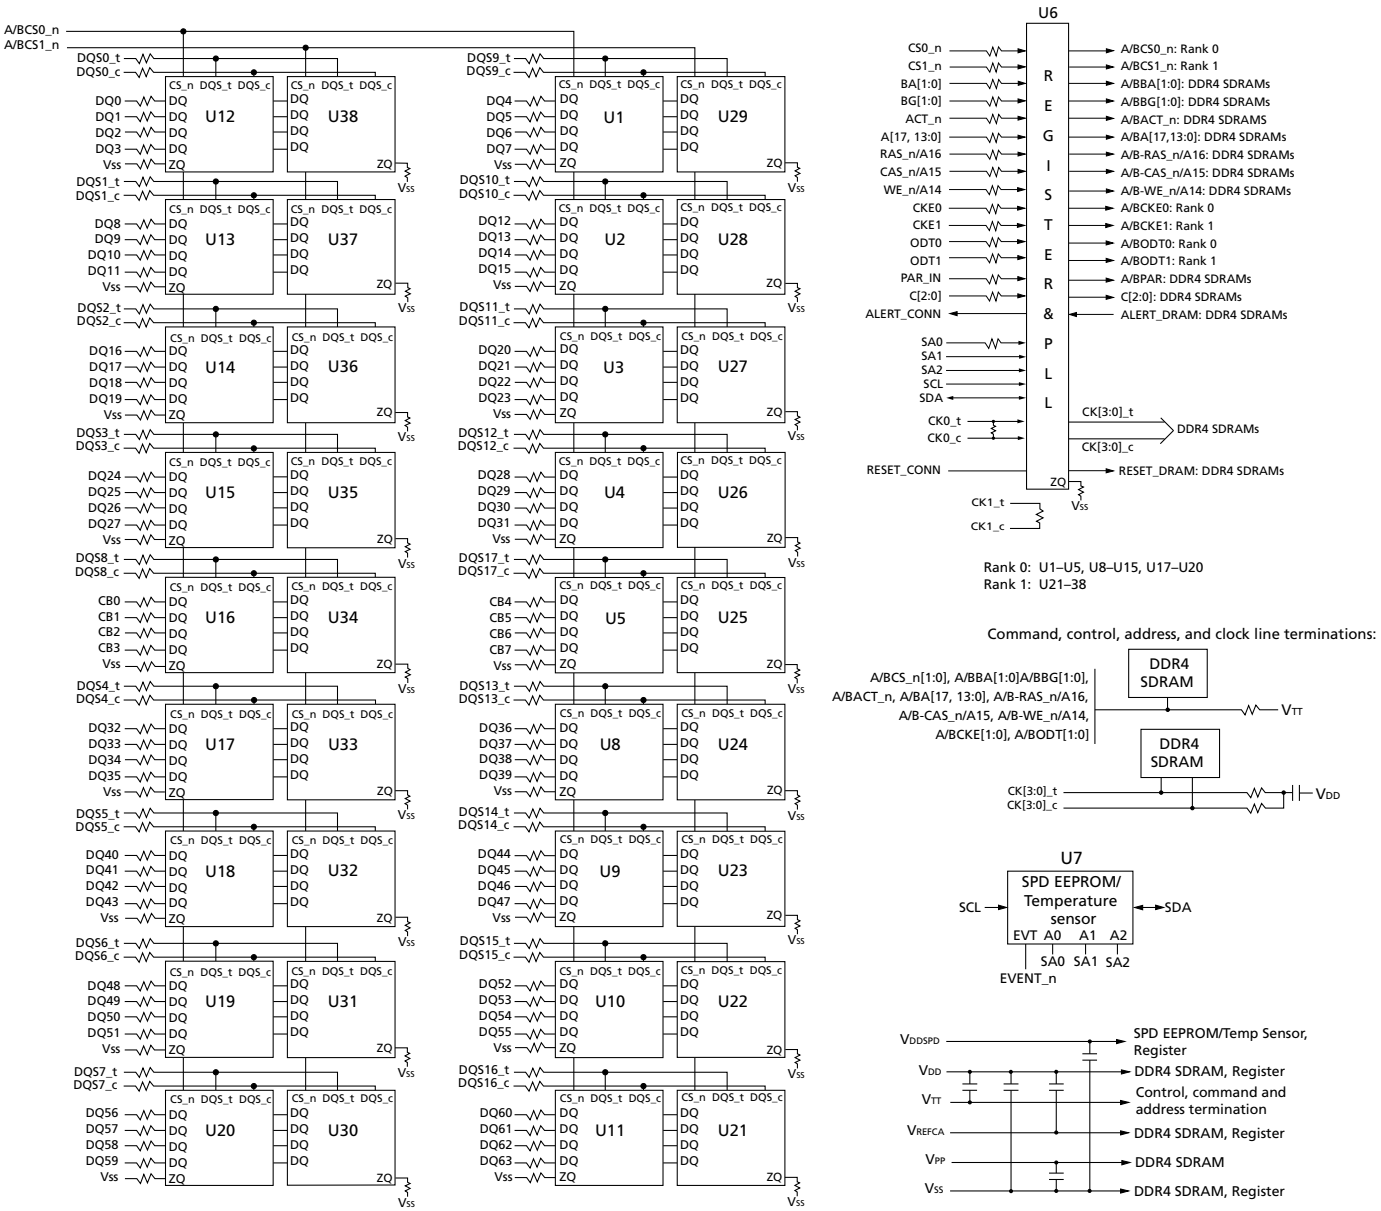

Note: 1. The ZQ ball on each DDR4 component is connected to an external 240Ω ±1% resistor that is tied to ground. It is used for the calibration of the component's ODT and output driver.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 4: Functional Block Diagram, R/C-B2 (PCBs 1971, 2436, 2615, or 2893)

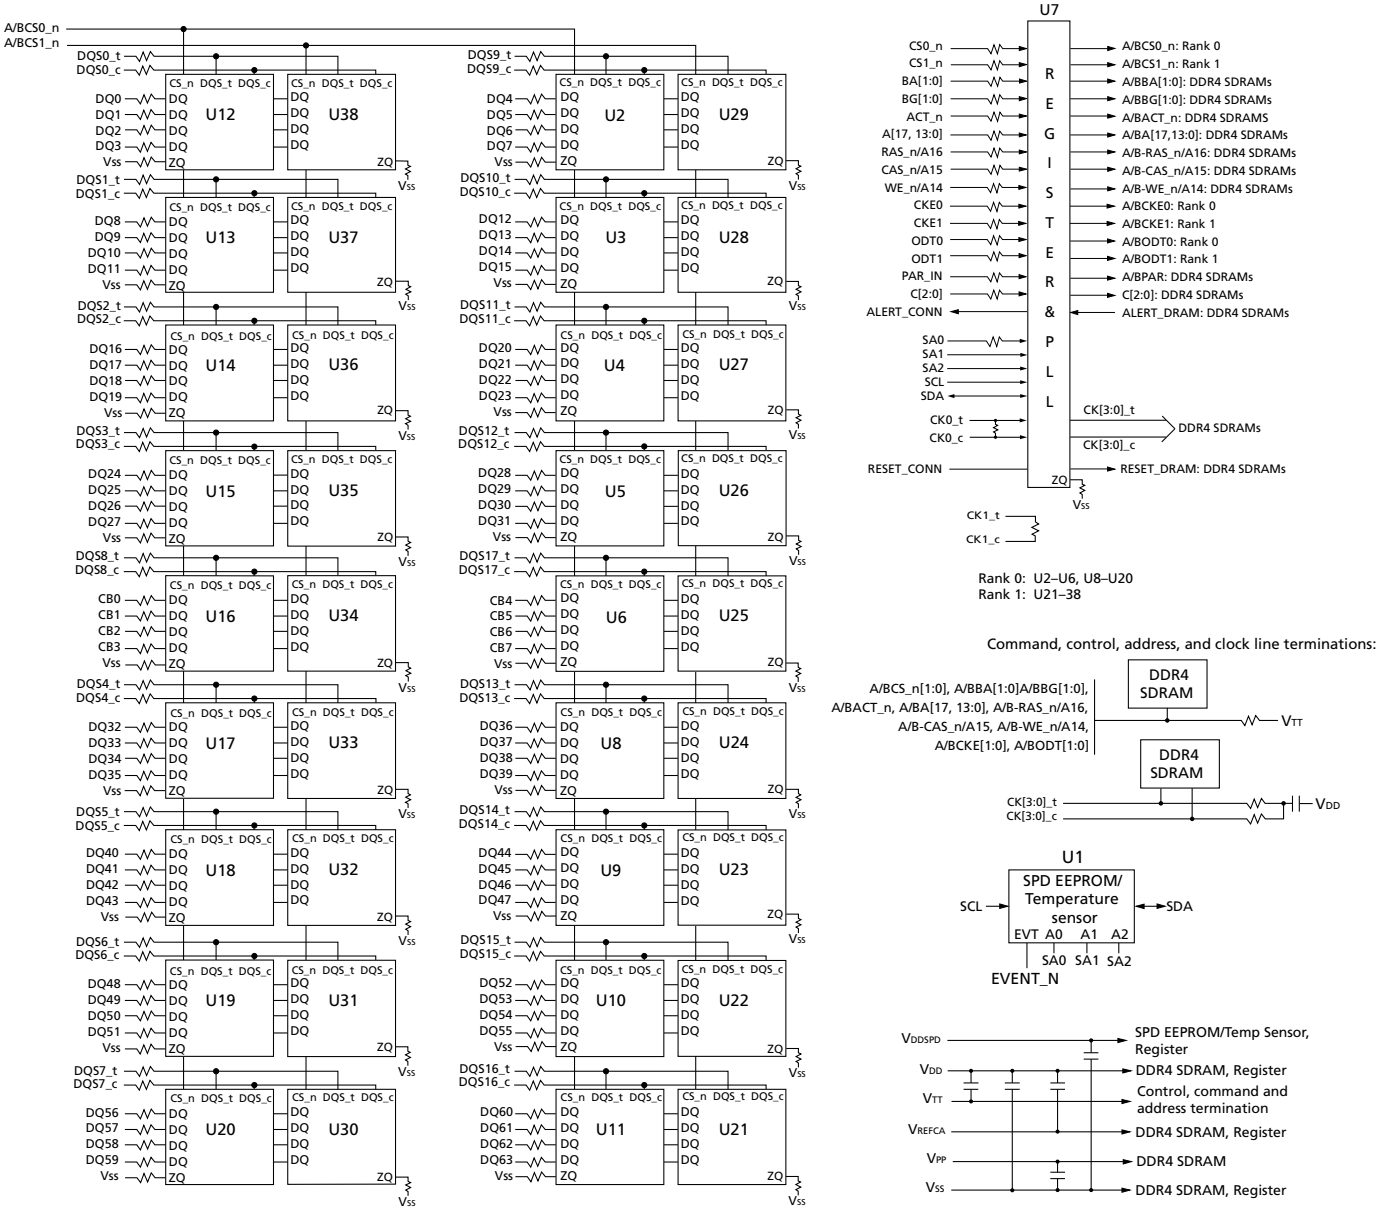

Note: 1. The ZQ ball on each DDR4 component is connected to an external 240Ω ±1% resistor that is tied to ground. It is used for the calibration of the component's ODT and output driver.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

General Description

High-speed DDR4 SDRAM modules use DDR4 SDRAM devices with two or four internal memory bank groups. DDR4 SDRAM modules utilizing 4- and 8-bit-wide DDR4 SDRAM devices have four internal bank groups consisting of four memory banks each, providing a total of 16 banks. 16-bit-wide DDR4 SDRAM devices have two internal bank groups consisting of four memory banks each, providing a total of eight banks. DDR4 SDRAM modules benefit from the DDR4 SDRAM's use of an 8*n*-prefetch architecture with an interface designed to transfer two data words per clock cycle at the I/O pins. A single READ or WRITE operation for the DDR4 SDRAM effectively consists of a single 8*n*-bit-wide, four-clock data transfer at the internal DRAM core and eight corresponding *n*-bit-wide, one-half-clock-cycle data transfers at the I/O pins.

DDR4 modules use two sets of differential signals: DQS_t and DQS_c to capture data and CK_t and CK_c to capture commands, addresses, and control signals. Differential clocks and data strobes ensure exceptional noise immunity for these signals and provide precise crossing points to capture input signals.

Fly-By Topology

DDR4 modules use faster clock speeds than earlier DDR technologies, making signal quality more important than ever. For improved signal quality, the clock, control, command, and address buses have been routed in a fly-by topology, where each clock, control, command, and address pin on each DRAM is connected to a single trace and terminated (rather than a tree structure, where the termination is off the module near the connector). Inherent to fly-by topology, the timing skew between the clock and DQS signals can be accounted for by using the write-leveling feature of DDR4.

Module Manufacturing Location

Micron Technology manufactures modules at sites worldwide. Customers may receive modules from any of the manufacturing locations listed below.

Table 10: DRAM Module Manufacturing Locations

Manufacturing Site Location	Country of Origin Specified on Label
Boise, USA	USA
Aguadilla, Puerto Rico	Puerto Rico
Xian, China	China
Singapore	Singapore

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Address Mapping to DRAM

Address Mirroring

To achieve optimum routing of the address bus on DDR4 multirank modules, the address bus will be wired as shown in the table below, or mirrored. For quad-rank modules, ranks 1 and 3 are mirrored, and ranks 0 and 2 are non-mirrored. Highlighted address pins have no secondary functions allowing for normal operation when cross-wired. Data is still read from the same address it was written. However, LOAD MODE operations require a specific address. This requires the controller to accommodate for a rank that is mirrored. Systems may reference DDR4 SPD to determine whether the module has mirroring implemented or not. See the JEDEC DDR4 SPD specification for more details.

Table 11: Address Mirroring

Edge Connector Pin	DRAM Pin, Non-Mirrored	DRAM Pin, Mirrored
A0	A0	A0
A1	A1	A1
A2	A2	A2
A3	A3	A4
A4	A4	A3
A5	A5	A6
A6	A6	A5
A7	A7	A8
A8	A8	A7
A9	A9	A9
A10	A10	A10
A11	A11	A13
A13	A13	A11
A12	A12	A12
A14	A14	A14
A15	A15	A15
A16	A16	A16
A17	A17	A17
BA0	BA0	BA1
BA1	BA1	BA0
BG0	BG0	BG1
BG1	BG1	BG0

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Registering Clock Driver Operation

Registered DDR4 SDRAM modules use a registering clock driver device consisting of a register and a phase-lock loop (PLL). The device complies with the JEDEC DDR4 RCD specification.

To reduce the electrical load on the host memory controller's command, address, and control bus, Micron's RDIMMs use a DDR4 registering clock driver (RCD). The RCD presents a single load to the controller while redriving signals to the DDR4 SDRAM devices, which helps enable higher densities and increase signal integrity. The RCD also provides a low-jitter, low-skew PLL that redistributes a differential clock pair to multiple differential pairs of clock outputs.

Control Words

The RCD device(s) used on DDR4 RDIMMs, LRDIMMs, and NVDIMMs contain configuration registers known as control words, which the host uses to configure the RCD based on criteria determined by the module design. Control words can be set by the host controller through either the DRAM address and control bus or the I^2C bus interface. The RCD I^2C bus interface resides on the same I^2C bus interface as the module temperature sensor and EEPROM.

Parity Operations

The RCD includes a parity-checking function that can be enabled or disabled in control word RC0E. The RCD receives a parity bit at the DPAR input from the memory controller and compares it with the data received on the qualified command and address inputs; it indicates on its open-drain ALERT_n pin whether a parity error has occurred. If parity checking is enabled, the RCD forwards commands to the SDRAM when no parity error has occurred. If the parity error function is disabled, the RCD forwards sampled commands to the SDRAM regardless of whether a parity error has occurred. Parity is also checked during control word WRITE operations unless parity checking is disabled.

Rank Addressing

The chip select pins (CS_n) on Micron's modules are used to select a specific rank of DRAM. The RDIMM is capable of selecting ranks in one of three different operating modes, dependent on setting DA[1:0] bits in the DIMM configuration control word located within the RCD. Direct DualCS mode is utilized for single- or dual-rank modules. For quad-rank modules, either direct or encoded QuadCS mode is used.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Temperature Sensor with SPD EEPROM Operation

Thermal Sensor Operations

The integrated thermal sensor continuously monitors the temperature of the module PCB directly below the device and updates the temperature data register. Temperature data may be read from the bus host at any time, which provides the host real-time feedback of the module's temperature. Multiple programmable and read-only temperature registers can be used to create a custom temperature-sensing solution based on system requirements and JEDEC JC-42.2.

EVENT_n Pin

The temperature sensor also adds the EVENT_n pin (open-drain), which requires a pull-up to V_{DDSPD}. EVENT_n is a temperature sensor output used to flag critical events that can be set up in the sensor's configuration registers. EVENT_n is not used by the serial presence-detect (SPD) EEPROM.

EVENT_n has three defined modes of operation: interrupt, comparator, and TCRIT. In interrupt mode, the EVENT_n pin remains asserted until it is released by writing a 1 to the clear event bit in the status register. In comparator mode, the EVENT_n pin clears itself when the error condition is removed. Comparator mode is always used when the temperature is compared against the TCRIT limit. In TCRIT only mode, the EVENT_n pin is only asserted if the measured temperature exceeds the TCRIT limit; it then remains asserted until the temperature drops below the TCRIT limit minus the TCRIT hysteresis.

SPD EEPROM Operation

DDR4 SDRAM modules incorporate SPD. The SPD data is stored in a 512-byte, JEDEC JC-42.4-compliant EEPROM that is segregated into four 128-byte, write-protectable blocks. The SPD content is aligned with these blocks as shown in the table below.

Block	Range		Description
0	0–127	000h–07Fh	Configuration and DRAM parameters
1	128–255	080h–0FFh	Module parameters
2	256–319	100h–13Fh	Reserved (all bytes coded as 00h)
	320–383	140h–17Fh	Manufacturing information
3	384–511	180h–1FFh	End-user programmable

The first 384 bytes are programmed by Micron to comply with JEDEC standard JC-45, "Appendix X: Serial Presence Detect (SPD) for DDR4 SDRAM Modules." The remaining 128 bytes of storage are available for use by the customer.

The EEPROM resides on a two-wire I^2C serial interface and is not integrated with the memory bus in any manner. It operates as a slave device in the I^2C bus protocol, with all operations synchronized by the serial clock. Transfer rates of up to 1 MHz are achievable at 2.5V (NOM).

Micron implements reversible software write protection on DDR4 SDRAM-based modules. This prevents the lower 384 bytes (bytes 0 to 383) from being inadvertently programmed or corrupted. The upper 128 bytes remain available for customer use and are unprotected.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Electrical Specifications

Stresses greater than those listed may cause permanent damage to the module. This is a stress rating only, and functional operation of the module at these or any other conditions outside those indicated in each device's data sheet is not implied. Exposure to absolute maximum rating conditions for extended periods may adversely affect reliability.

Table 12: Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Units	Notes
V_{DD}	V_{DD} supply voltage relative to V_{SS}	–0.4	1.5	V	1
V_{DDQ}	V_{DDQ} supply voltage relative to V_{SS}	–0.4	1.5	V	1
V_{PP}	Voltage on V_{PP} pin relative to V_{SS}	–0.4	3.0	V	2
V_{IN}, V_{OUT}	Voltage on any pin relative to V_{SS}	–0.4	1.5	V	

Table 13: Operating Conditions

Symbol	Parameter	Min	Nom	Max	Units	Notes
V_{DD}	V_{DD} supply voltage	1.14	1.20	1.26	V	1
V_{PP}	DRAM activating power supply	2.375	2.5	2.75	V	2
$V_{REFCA(DC)}$	Input reference voltage – command/address bus	0.49 × V_{DD}	0.5 × V_{DD}	0.51 × V_{DD}	V	3
I_{VTT}	Termination reference current from V_{TT}	–750	–	750	mA	
V_{TT}	Termination reference voltage (DC) – command/address bus	0.49 × V_{DD} - 20mV	0.5 × V_{DD}	0.51 × V_{DD} + 20mV	V	4
I_{IN}	Input leakage current; any input excluding ZQ; 0V < V_{IN} < 1.1V	–5	–	5	µA	5, 8
I_{ZQ}	Input leakage current; ZQ	–50	–	10	µA	6
I_{OZpd}	Output leakage current; V_{OUT} = V_{DD}; DQ is High-Z	–	–	10	µA	7
I_{OZpu}	Output leakage current; V_{OUT} = V_{SS}; DQ is High-Z; ODT is disabled with ODT input HIGH	–50	–	–	µA	7
I_{VREFCA}	V_{REFCA} leakage; V_{REFCA} = V_{DD}/2 (after DRAM is initialized)	–4.5	–	4.5	µA	8

Notes:
1. V_{DDQ} balls on DRAM are tied to V_{DD}.
2. V_{PP} must be greater than or equal to V_{DD} at all times.
3. V_{REFCA} must not be greater than 0.6 × V_{DD}. When V_{DD} is less than 500mV, V_{REF} may be less than or equal to 300mV.
4. V_{TT} termination voltages in excess of specification limit adversely affect command and address signals' voltage margins and reduce timing margins.
5. Command and address inputs are terminated to V_{DD}/2 in the registering clock driver. Input current is dependent on termination resistance set in the registering clock driver.
6. Tied to ground. Not connected to edge connector.
7. Multiply by the number of module ranks and then times the number of die per package.
8. RCD input current

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 14: Thermal Characteristics

Symbol	Parameter/Condition	Value	Units	Notes
T_C	Commercial operating case temperature	0 to 85	°C	1, 2, 3
T_C		>85 to 95	°C	1, 2, 3, 4
T_{OPER}	Normal operating temperature range	0 to 85	°C	5, 7
T_{OPER}	Extended temperature operating range (optional)	>85 to 95	°C	5, 7
T_{STG}	Non-operating storage temperature	–55 to 100	°C	6
RH_{STG}	Non-operating storage relative humidity (non-condensing)	5 to 95	%	
NA	Change rate of storage temperature	20	°C/hour	

Notes:
1. Maximum operating case temperature; T_C is measured in the center of the package.
2. A thermal solution must be designed to ensure the DRAM device does not exceed the maximum T_C during operation.
3. Device functionality is not guaranteed if the DRAM device exceeds the maximum T_C during operation.
4. If T_C exceeds 85°C, the DRAM must be refreshed externally at 2X refresh, which is a 3.9µs interval refresh rate.
5. The refresh rate must double when 85°C < T_{OPER} ≤ 95°C.
6. Storage temperature is defined as the temperature of the top/center of the DRAM and does not reflect the storage temperatures of shipping trays.
7. For additional information, refer to technical note TN-00-08: "Thermal Applications" available at micron.com.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

DRAM Operating Conditions

Recommended AC operating conditions are given in the DDR4 component data sheets. Component specifications are available at micron.com. Module speed grades correlate with component speed grades, as shown below.

Table 15: Module and Component Speed Grades

DDR4 components may exceed the listed module speed grades; module may not be available in all listed speed grades

Module Speed Grade	Component Speed Grade
-3G2	-062E
-2G9	-068
-2G6	-075
-2G3	-083
-2G1	-093E

Design Considerations

Simulations

Micron memory modules are designed to optimize signal integrity through carefully designed terminations, controlled board impedances, routing topologies, trace length matching, and decoupling. However, good signal integrity starts at the system level. Micron encourages designers to simulate the signal characteristics of the system's memory bus to ensure adequate signal integrity of the entire memory system.

Power

Operating voltages are specified at the edge connector of the module, not at the DRAM. Designers must account for any system voltage drops at anticipated power levels to ensure the required supply voltage is maintained.

I_{DD}, I_{PP}, and I_{DDQ} Specifications

I_{DD} and I_{PP} values are only for the DDR4 SDRAM and are calculated from values in the supporting component data sheet. I_{PP} and I_{DDQ} currents are not included in I_{DD} currents. I_{DD} and I_{DDQ} currents are not included in I_{PP} currents. Micron does not specify I_{DDQ} currents. In DRAM module application, I_{DDQ} cannot be measured separately because V_{DD} and V_{DDQ} use a merged power layer in the module PCB.

Certain I_{DD}/I_{PP} conditions must be derated for optional modes of operation, such as CA parity, DBI, write CRC, additive latency, geardown, CAL, 2X and 4X REF, and DLL disabled. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

I_{DD} Specifications

Table 16: DDR4 I_{DD} Specifications and Conditions (0° ≤ T_C ≤ 85°) – 32GB (Die Revision B)

Values are for the MT40A2G4 DDR4 SDRAM only and are computed from values specified in the 8Gb (2 Gig x 4) component data sheet

Parameter	Symbol	2666	2400	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}[1]	1278	1224	mA
One bank ACTIVATE-PRECHARGE, wordline boost, I_{PP} current	I_{PP0}[1]	108	108	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}[1]	1494	1440	mA
Precharge standby current	I_{DD2N}[2]	1260	1224	mA
Precharge standby ODT current	I_{DD2NT}[1]	1350	1350	mA
Precharge power-down current	I_{DD2P}[2]	900	900	mA
Precharge quite standby current	I_{DD2Q}[2]	1080	1080	mA
Active standby current	I_{DD3N}[2]	1476	1368	mA
Active standby I_{PP} current	I_{PP3N}[2]	108	108	mA
Active power-down current	I_{DD3P}[2]	1224	1152	mA
Burst read current	I_{DD4R}[1]	2628	2430	mA
Burst write current	I_{DD4W}[1]	2466	2304	mA
Burst refresh current (1x REF)	I_{DD5R}[1]	1458	1404	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}[1]	144	144	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}[2]	1080	1080	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}[2]	1260	1260	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}[2]	720	720	mA
Auto self refresh current (25°C)	I_{DD6A}[2]	309.6	309.6	mA
Auto self refresh current (45°C)	I_{DD6A}[2]	720	720	mA
Auto self refresh current (75°C)	I_{DD6A}[2]	1080	1080	mA
Auto self refresh current I_{PP} current	I_{PP6X}[2]	180	180	mA
Bank interleave read current	I_{DD7}[1]	3150	3060	mA
Bank interleave read I_{PP} current	I_{PP7}[1]	324	324	mA
Maximum power-down current	I_{DD8}[2]	900	900	mA

Notes:
1. One module rank in the active $I_{DD/PP}$, the other rank in $I_{DD2P/PP3N}$.
2. All ranks in this $I_{DD/PP}$ condition.
3. When T_C > 85°C, the I_{DD} and I_{PP} values must be derated. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die-revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 17: DDR4 I_{DD} Specifications and Conditions (0° ≤ T_C ≤ 85°) – 32GB (Die Revision D)

Values are for the MT40A2G4 DDR4 SDRAM only and are computed from values specified in the 8Gb (2 Gig x 4) component data sheet

Parameter	Symbol	2666	2400	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}[1]	1278	1224	mA
One bank ACTIVATE-PRECHARGE, wordline boost, I_{PP} current	I_{PP0}[1]	108	108	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}[1]	1494	1440	mA
Precharge standby current	I_{DD2N}[2]	1260	1224	mA
Precharge standby ODT current	I_{DD2NT}[1]	1350	1350	mA
Precharge power-down current	I_{DD2P}[2]	900	900	mA
Precharge quite standby current	I_{DD2Q}[2]	1080	1080	mA
Active standby current	I_{DD3N}[2]	1656	1548	mA
Active standby I_{PP} current	I_{PP3N}[2]	108	108	mA
Active power-down current	I_{DD3P}[2]	1224	1152	mA
Burst read current	I_{DD4R}[1]	2628	2430	mA
Burst write current	I_{DD4W}[1]	2646	2430	mA
Burst refresh current (1x REF)	I_{DD5R}[1]	1548	1494	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}[1]	144	144	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}[2]	1116	1116	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}[2]	1296	1296	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}[2]	756	756	mA
Auto self refresh current (25°C)	I_{DD6A}[2]	309.6	309.6	mA
Auto self refresh current (45°C)	I_{DD6A}[2]	756	756	mA
Auto self refresh current (75°C)	I_{DD6A}[2]	1116	1116	mA
Auto self refresh current I_{PP} current	I_{PP6X}[2]	180	180	mA
Bank interleave read current	I_{DD7}[1]	4050	3780	mA
Bank interleave read I_{PP} current	I_{PP7}[1]	378	360	mA
Maximum power-down current	I_{DD8}[2]	900	900	mA

Notes:
1. One module rank in the active $I_{DD/PP}$, the other rank in $I_{DD2P/PP3N}$.
2. All ranks in this $I_{DD/PP}$ condition.
3. When T_C > 85°C, the I_{DD} and I_{PP} values must be derated. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die-revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 18: DDR4 I_{DD} Specifications and Conditions (0° ≤ T_C ≤ 85°) – 32GB (Die Revision H)

Values are for the MT40A2G4 DDR4 SDRAM only and are computed from values specified in the 8Gb (2 Gig x 4) component data sheet

Parameter	Symbol	2666	2400	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}[1]	1512	1476	mA
One bank ACTIVATE-PRECHARGE, wordline boost, I_{PP} current	I_{PP0}[1]	135	135	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}[1]	1764	1710	mA
Precharge standby current	I_{DD2N}[2]	1512	1404	mA
Precharge standby ODT current	I_{DD2NT}[1]	1350	1260	mA
Precharge power-down current	I_{DD2P}[2]	972	972	mA
Precharge quite standby current	I_{DD2Q}[2]	1296	1224	mA
Active standby current	I_{DD3N}[2]	1764	1692	mA
Active standby I_{PP} current	I_{PP3N}[2]	162	162	mA
Active power-down current	I_{DD3P}[2]	1224	1224	mA
Burst read current	I_{DD4R}[1]	3312	2916	mA
Burst write current	I_{DD4W}[1]	3942	3420	mA
Burst refresh current (1x REF)	I_{DD5R}[1]	1404	1368	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}[1]	180	180	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}[2]	1296	1296	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}[2]	1764	1728	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}[2]	936	936	mA
Auto self refresh current (25°C)	I_{DD6A}[2]	540	540	mA
Auto self refresh current (45°C)	I_{DD6A}[2]	936	936	mA
Auto self refresh current (75°C)	I_{DD6A}[2]	1296	1296	mA
Auto self refresh current I_{PP} current	I_{PP6X}[2]	180	180	mA
Bank interleave read current	I_{DD7}[1]	7470	5490	mA
Bank interleave read I_{PP} current	I_{PP7}[1]	549	549	mA
Maximum power-down current	I_{DD8}[2]	756	756	mA

Notes:
1. One module rank in the active $I_{DD/PP}$, the other rank in $I_{DD2P/PP3N}$.
2. All ranks in this $I_{DD/PP}$ condition.
3. When T_C > 85°C, the I_{DD} and I_{PP} values must be derated. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die-revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 19: DDR4 I_{DD} Specifications and Conditions (0° ≤ T_C ≤ 85°) – 32GB (Die Revision E)

Values are for the MT40A2G4 DDR4 SDRAM only and are computed from values specified in the 8Gb (2 Gig x 4) component data sheet

Parameter	Symbol	3200	2933	2666	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}[1]	1206	1170	1134	mA
One bank ACTIVATE-PRECHARGE, wordline boost, I_{PP} current	I_{PP0}[1]	108	108	108	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}[1]	1440	1404	1368	mA
Precharge standby current	I_{DD2N}[2]	1188	1152	1116	mA
Precharge standby ODT current	I_{DD2NT}[1]	1188	1152	1116	mA
Precharge power-down current	I_{DD2P}[2]	792	792	792	mA
Precharge quite standby current	I_{DD2Q}[2]	936	936	936	mA
Active standby current	I_{DD3N}[2]	1512	1440	1368	mA
Active standby I_{PP} current	I_{PP3N}[2]	108	108	108	mA
Active power-down current	I_{DD3P}[2]	1152	1116	1080	mA
Burst read current	I_{DD4R}[1]	3150	2952	2754	mA
Burst write current	I_{DD4W}[1]	2772	2610	2448	mA
Burst refresh current (1x REF)	I_{DD5R}[1]	1296	1278	1260	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}[1]	144	144	144	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}[2]	1224	1224	1224	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}[2]	2088	2088	2088	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}[2]	756	756	756	mA
Auto self refresh current (25°C)	I_{DD6A}[2]	309.6	309.6	309.6	mA
Auto self refresh current (45°C)	I_{DD6A}[2]	756	756	756	mA
Auto self refresh current (75°C)	I_{DD6A}[2]	1116	1116	1116	mA
Auto self refresh current (95°C)	I_{DD6A}[2]	2088	2088	2088	mA
Auto self refresh current I_{PP} current	I_{PP6X}[2]	180	180	180	mA
Bank interleave read current	I_{DD7}[1]	4536	4266	3996	mA
Bank interleave read I_{PP} current	I_{PP7}[1]	306	306	306	mA
Maximum power-down current	I_{DD8}[2]	648	648	648	mA

Notes:
1. One module rank in the active $I_{DD/PP}$, the other rank in $I_{DD2P/PP3N}$.
2. All ranks in this $I_{DD/PP}$ condition.
3. When T_C > 85°C, the I_{DD} and I_{PP} values must be derated. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die-revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 20: DDR4 I_{DD} Specifications and Conditions (0° ≤ T_C ≤ 85°) – 32GB (Die Revision J)

Values are for the MT40A2G4 DDR4 SDRAM only and are computed from values specified in the 8Gb (2 Gig x 4) component data sheet

Parameter	Symbol	3200	2933	2666	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}[1]	1170	1134	1098	mA
One bank ACTIVATE-PRECHARGE, wordline boost, I_{PP} current	I_{PP0}[1]	108	108	108	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}[1]	1386	1350	1314	mA
Precharge standby current	I_{DD2N}[2]	1116	1080	1080	mA
Precharge standby ODT current	I_{DD2NT}[1]	1152	1116	1080	mA
Precharge power-down current	I_{DD2P}[2]	792	792	792	mA
Precharge quite standby current	I_{DD2Q}[2]	936	936	936	mA
Active standby current	I_{DD3N}[2]	1512	1440	1368	mA
Active standby I_{PP} current	I_{PP3N}[2]	108	108	108	mA
Active power-down current	I_{DD3P}[2]	1152	1116	1080	mA
Burst read current	I_{DD4R}[1]	3006	2826	2646	mA
Burst write current	I_{DD4W}[1]	2664	2502	2340	mA
Burst refresh current (1x REF)	I_{DD5R}[1]	1242	1224	1206	mA
Burst refresh I_{PP} current (1x REF)	I_{PP5R}[1]	144	144	144	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}[2]	1152	1152	1152	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}[2]	1980	1980	1980	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}[2]	720	720	720	mA
Auto self refresh current (25°C)	I_{DD6A}[2]	295.2	295.2	295.2	mA
Auto self refresh current (45°C)	I_{DD6A}[2]	720	720	720	mA
Auto self refresh current (75°C)	I_{DD6A}[2]	1080	1080	1080	mA
Auto self refresh current (95°C)	I_{DD6A}[2]	1980	1980	1980	mA
Auto self refresh current I_{PP} current	I_{PP6X}[2]	180	180	180	mA
Bank interleave read current	I_{DD7}[1]	4338	4086	3816	mA
Bank interleave read I_{PP} current	I_{PP7}[1]	252	252	252	mA
Maximum power-down current	I_{DD8}[2]	648	648	648	mA

Notes:
1. One module rank in the active $I_{DD/PP}$, the other rank in $I_{DD2P/PP3N}$.
2. All ranks in this $I_{DD/PP}$ condition.
3. When T_C > 85°C, the I_{DD} and I_{PP} values must be derated. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die-revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 21: DDR4 I_{DD} Specifications and Conditions (0° ≤ T_C ≤ 85°) – 32GB (Die Revision R)

Values are for the MT40A2G4 DDR4 SDRAM only and are computed from values specified in the 8Gb (2 Gig x 4) component data sheet

Parameter	Symbol	3200	2933	2666	Units
One bank ACTIVATE-PRECHARGE current	I_{DD0}[1]	1512	1476	1440	mA
One bank ACTIVATE-PRECHARGE, wordline boost, I_{PP} current	I_{PP0}[1]	108	108	108	mA
One bank ACTIVATE-READ-PRECHARGE current	I_{DD1}[1]	1602	1566	1530	mA
Precharge standby current	I_{DD2N}[2]	1368	1332	1296	mA
Precharge standby ODT current	I_{DD2NT}[1]	1422	1386	1350	mA
Precharge power-down current	I_{DD2P}[2]	1080	1080	1080	mA
Precharge quite standby current	I_{DD2Q}[2]	1224	1224	1224	mA
Active standby current	I_{DD3N}[2]	1512	1440	1368	mA
Active standby I_{PP} current	I_{PP3N}[2]	108	108	108	mA
Active power-down current	I_{DD3P}[2]	1152	1116	1080	mA
Burst read current	I_{DD4R}[1]	2538	1394	2268	mA
Burst write current	I_{DD4W}[1]	2160	2052	1944	mA
Distributed refresh current (1x REF)	I_{DD5R}[1]	1530	1512	1494	mA
Distributed refresh I_{PP} current (1x REF)	I_{PP5R}[1]	126	126	126	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I_{DD6N}[2]	1152	1152	1152	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I_{DD6E}[2]	1872	1872	1872	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I_{DD6R}[2]	684	684	684	mA
Auto self refresh current (25°C)	I_{DD6A}[2]	288	288	288	mA
Auto self refresh current (45°C)	I_{DD6A}[2]	684	684	684	mA
Auto self refresh current (75°C)	I_{DD6A}[2]	1044	1044	1044	mA
Auto self refresh current (95°C)	I_{DD6A}[2]	1872	1872	1872	mA
Auto self refresh current I_{PP} current	I_{PP6X}[2]	180	180	180	mA
Bank interleave read current	I_{DD7}[1]	4554	4284	4032	mA
Bank interleave read I_{PP} current	I_{PP7}[1]	468	468	468	mA
Maximum power-down current	I_{DD8}[2]	864	864	864	mA

Notes:
1. One module rank in the active $I_{DD/PP}$, the other rank in $I_{DD2P/PP3N}$.
2. All ranks in this $I_{DD/PP}$ condition.
3. When T_C > 85°C, the I_{DD} and I_{PP} values must be derated. Refer to the base device data sheet I_{DD} and I_{PP} specification tables for derating values for the applicable die-revision.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Registering Clock Driver Specifications

Table 22: Registering Clock Driver Electrical Characteristics

DDR4 RCD01 devices or equivalent

Parameter	Symbol	Pins	Min	Nom	Max	Units
DC supply voltage	V_{DD}	–	1.14	1.2	1.26	V
DC reference voltage	V_{REF}	V_{REFCA}	0.49 × V_{DD}	0.5 × V_{DD}	0.51 × V_{DD}	V
DC termination voltage	V_{TT}	–	V_{REF} - 40mV	V_{REF}	V_{REF} + 40mV	V
High-level input voltage	$V_{IH.\ CMOS}$	DRST_n	0.65 × V_{DD}	–	V_{DD}	V
Low-level input voltage	$V_{IL.\ CMOS}$		0	–	0.35 × V_{DD}	V
DRST_n pulse width	^{t}IN-IT_Pow-er_stable	–	1.0	–	–	µs
AC high-level output voltage	$V_{OH(AC)}$	All outputs except ALERT_n	V_{TT} + (0.15 × V_{DD})	–	–	V
AC low-level output voltage	$V_{OL(AC)}$		–	–	V_{TT} + (0.15 × V_{DD})	V
AC differential output high measurement level (for output slew rate)	$V_{OHdiff(AC)}$	Yn_t - Yn_c, BCK_t - BCK_c	–	0.3 × V_{DD}	–	mV
AC differential output low measurement level (for output slew rate)	$V_{OLdiff(AC)}$		–	–0.3 × V_{DD}	–	mV

Note: 1. Timing and switching specifications for the register listed are critical for proper operation of DDR4 SDRAM RDIMMs. These are meant to be a subset of the parameters for the specific device used on the module. See the JEDEC RCD01 specification for complete operating electrical characteristics. Registering clock driver parametric values are specified for device default control word settings, unless otherwise stated. The RC0A control word setting does not affect parametric values.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Temperature Sensor with SPD EEPROM

The temperature sensor continuously monitors the module's temperature and can be read back at any time over the I^2C bus shared with the serial presence-detect (SPD) EEPROM. Refer to JEDEC JC-42.4 EE1004 and TSE2004 device specifications for complete details.

SPD Data

For the latest SPD data, refer to Micron's SPD page: micron.com/SPD.

Table 23: Temperature Sensor with SPD EEPROM Operating Conditions

Parameter/Condition	Symbol	Min	Nom	Max	Units
Supply voltage	V_{DDSPD}	1.7	2.5	3.3	V
Input low voltage: Logic 0; All inputs	V_{IL}	–0.5	–	V_{DDSPD} × 0.3	V
Input high voltage: Logic 1; All inputs	V_{IH}	V_{DDSPD} × 0.7	–	V_{DDSPD} + 0.5	V
Output low voltage: 3mA sink current V_{DDSPD} > 2V	V_{OL}	–	–	0.4	V
Input leakage current: (SCL, SDA) V_{IN} = V_{DDSPD} or V_{SSSPD}	I_{LI}	–	–	±5	µA
Output leakage current: V_{OUT} = V_{DDSPD} or V_{SSSPD}, SDA in High-Z	I_{LO}	–	–	±5	µA

Notes:
1. Table is provided as a general reference. Consult JEDEC JC-42.4 TSE2004 device specifications for complete details.
2. Operation at ^tSCL > 100 kHz may require V_{DDSPD} ≤ 2.2.
3. All voltages referenced to V_{DDSPD}.

Table 24: Temperature Sensor and EEPROM Serial Interface Timing

Parameter/Condition	Symbol	Min	Max	Units
Clock frequency	^fSCL	10	1000	kHz
Clock pulse width HIGH time	^tHIGH	260	–	ns
Clock pulse width LOW time	^tLOW	500	–	ns
Detect clock LOW timeout	$^tTIMEOUT$	25	35	ms
SDA rise time	^tR	–	120	ns
SDA fall time	^tF	–	120	ns
Data-in setup time	$^tSU:DAT$	50	–	ns
Data-in hold time	$^tHD:DI$	0	–	ns
Data out hold time	$^tHD:DAT$	0	350	ns
Start condition setup time	$^tSU:STA$	260	–	ns
Start condition hold time	$^tHD:STA$	260	–	ns
Stop condition setup time	$^tSU:STO$	260	–	ns
Time the bus must be free before a new transition can start	^tBUF	500	–	ns
Write time	^tW	–	5	ms
Warm power cycle time off	^tPOFF	1	–	ms

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 24: Temperature Sensor and EEPROM Serial Interface Timing (Continued)


Parameter/Condition	Symbol	Min	Max	Units
Time from power-on to first command	^{t}INIT	10	–	ms

Notes:
1. Table is provided as a general reference. Consult JEDEC JC-42.4 TSE2004 device specifications for complete details.
2. Operation at ^{t}SCL > 100 kHz may require V_{DDSPD} ≤ 2.2.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Module Dimensions


Figure 5: 288-Pin DDR4 RDIMM (R/C-B1, PCB 1798)

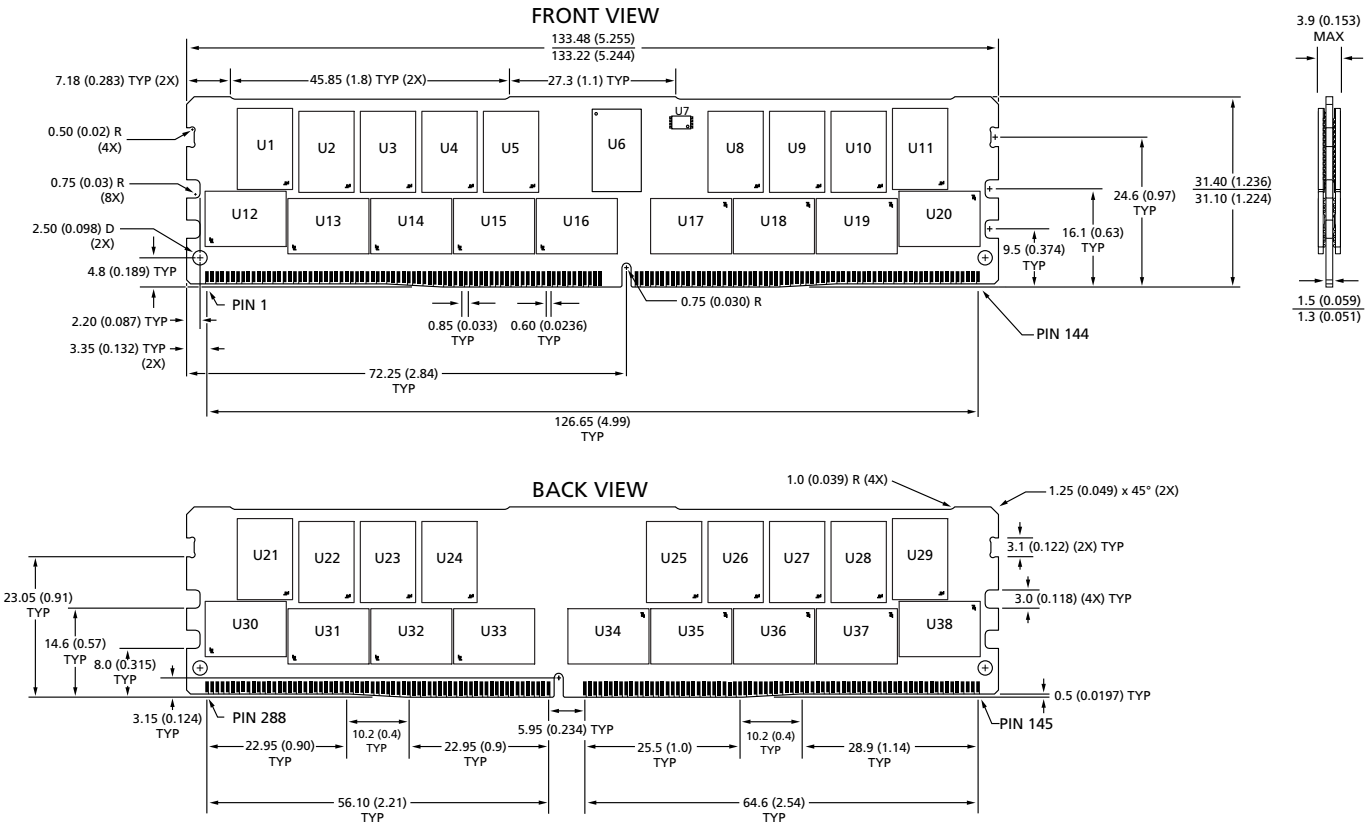

Notes:
1. All dimensions are in millimeters (inches); MAX/MIN or typical (TYP) where noted.
2. Tolerance on all dimensions ±0.15mm unless otherwise specified.
3. The dimensional diagram is for reference only.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 6: 288-Pin DDR4 RDIMM (R/C-B2, PCBs 1971, 2436, 2615, or 2893)

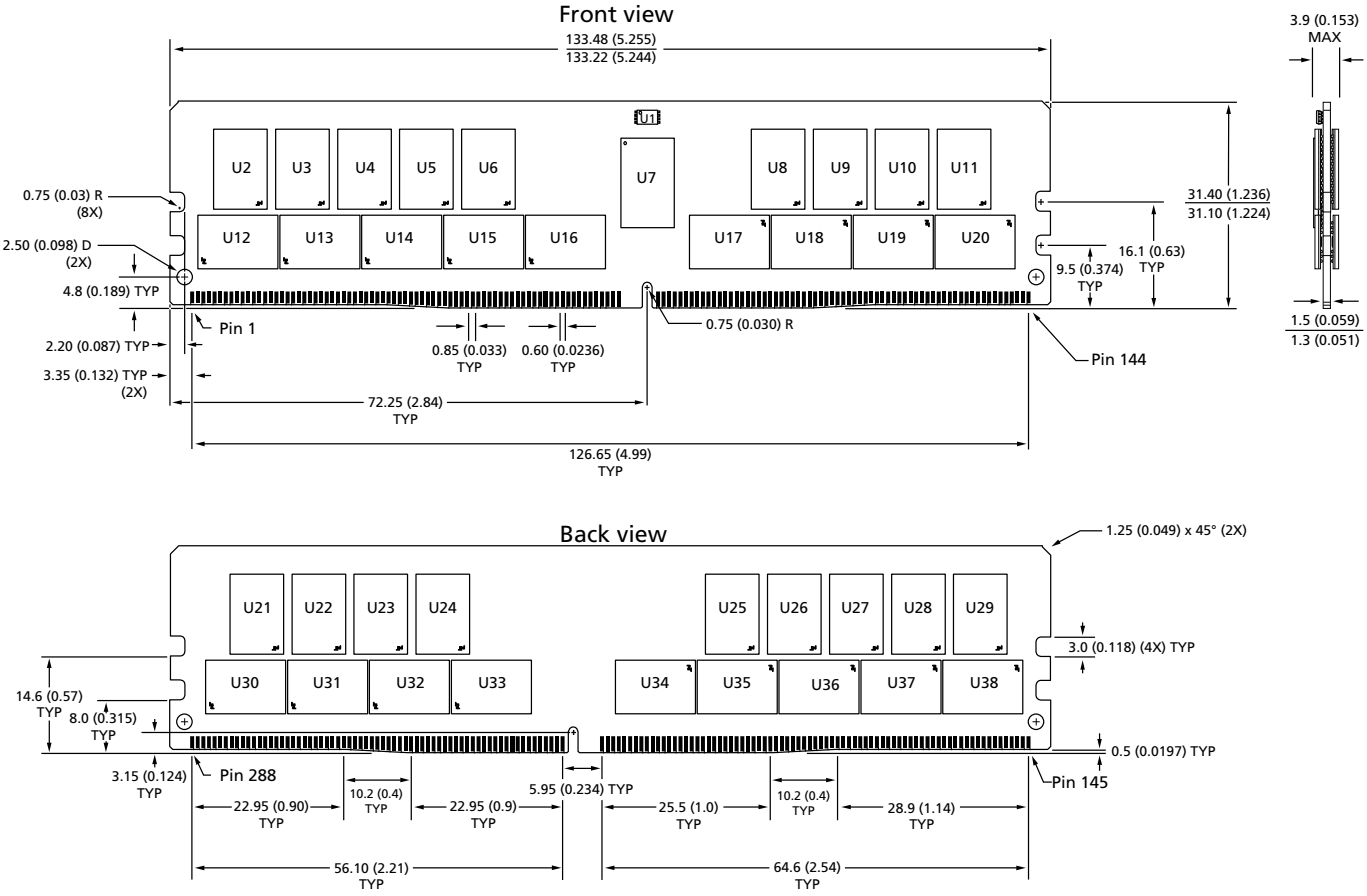

Notes:
1. All dimensions are in millimeters (inches); MAX/MIN or typical (TYP) where noted.
2. Tolerance on all dimensions ±0.15mm unless otherwise specified.
3. The dimensional diagram is for reference only.

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-4000
www.micron.com/products/support Sales inquiries: 800-932-4992
Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.
This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.