
Click to ORDER samples

AM1LS-LPVZ

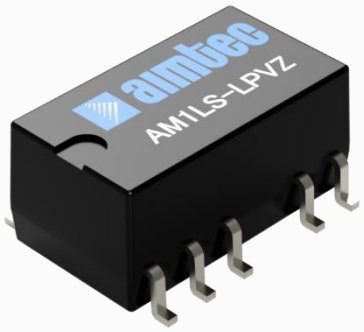

SMD

The new AM1LS-LPVZ is a DC/DC converter that offers much greater cost effectiveness due to material normalization and production automation which increases the reliability and performance of this new component. Offering a commercial input voltage range of 5VDC and an output voltage range from 3.3-24V, this series will offer many benefits to your new system design.

This new series offers great operating temperatures, from -40°C to 105°C with full power up to 100°C. It also features an isolation of 3000VDC for improved reliability and system safety. Furthermore, a higher MTBF of 3500,000h and output short circuit protection (OSCP) come standard with the series.

The AM1LS-LPVZ is suitable for information technology, instrumentation, industrial applications, communication and civil applications.

Features


- No load input current as low as 3mA
- Operating Temp: -40 °C to +105 °C
- High I/O isolation voltage: 3000 VDC
- Output short circuit protection
- High efficiency up to 85%
- SMD type package, Industry standard pin-out

RoHS

3yr Warranty

CE

Summary

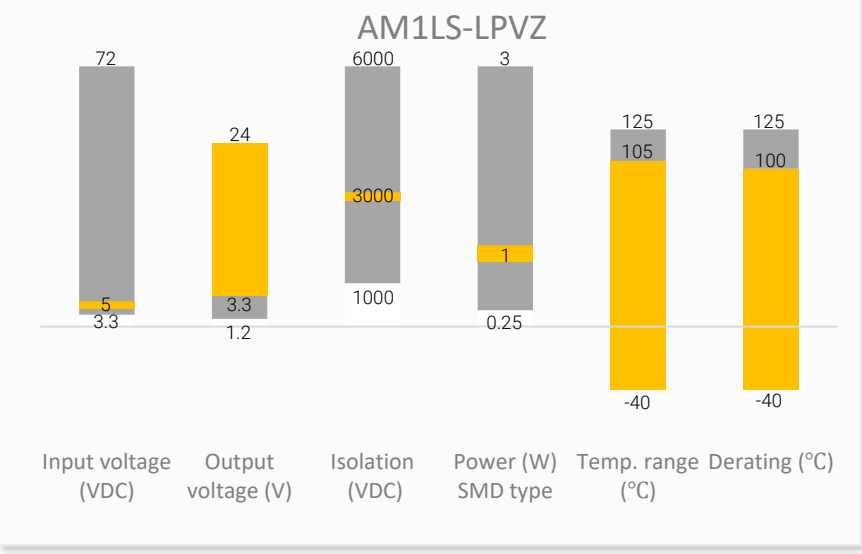

Training



Product Training Video (click to open)

Press Release

Coming Soon!

Application Notes

Applications

IoT

Industrial

Telecom

Instrumentation

Models & Specifications

Single Output

Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Max (mA)		Output Current (mA)		Isolation (VDC)	Maximum Capacitive Load (µF)	Efficiency Full Load Typ. (%)
			No Load	Full Load	No Load	Full Load			
AM1LS-0503SH30LPVZ	5 (4.5-5.5)	3.3	5	270	30	303	3000	2400	74
AM1LS-0505SH30LPVZ	5 (4.5-5.5)	5	5	270	20	200	3000	2400	82
AM1LS-0509SH30LPVZ	5 (4.5-5.5)	9	12	241	12	111	3000	1000	83
AM1LS-0512SH30LPVZ	5 (4.5-5.5)	12	12	241	9	84	3000	560	83
AM1LS-0515SH30LPVZ	5 (4.5-5.5)	15	18	241	7	67	3000	560	83
AM1LS-0524SH30LPVZ	5 (4.5-5.5)	24	18	241	4	42	3000	220	85

Dual Output

Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Max (mA)		Output Current (mA)		Isolation (VDC)	Maximum Capacitive Load (µF)	Efficiency Full Load Typ. (%)
			No Load	Full Load	No Load	Full Load			
AM1LS-0503DH30LPVZ	5 (4.5-5.5)	±3.3	5	270	±15	±151	3000	1200	74
AM1LS-0505DH30LPVZ	5 (4.5-5.5)	±5	5	270	±10	±100	3000	1200	82
AM1LS-0509DH30LPVZ	5 (4.5-5.5)	±9	12	241	±6	±56	3000	470	83
AM1LS-0512DH30LPVZ	5 (4.5-5.5)	±12	12	241	±5	±42	3000	220	83
AM1LS-0515DH30LPVZ	5 (4.5-5.5)	±15	18	241	±4	±34	3000	220	83
AM1LS-0524DH30LPVZ	5 (4.5-5.5)	±24	18	241	±2	±21	3000	100	85

Input Specification

Parameters	Conditions	Typical	Maximum	Units
Filter	Capacitor			
Absolute maximum rating	Maximum duration 1s	> -0.7	9	VDC
Input reflected ripple current		15		mA

Output Specification

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	See Typical Characteristic			
Line regulation	Per 1% Vin change, 3.3Vout models		±1.5	%
	Per 1% Vin change, Others		±1.2	%
Load regulation	10-100% load, 3.3Vout models	15	20	%
	10-100% load, 5Vout models	10	15	%
	10-100% load, 9Vout models	9	10	%
	10-100% load, 12Vout models	8	10	%
	10-100% load, 15Vout models	7	10	%
	10-100% load, 24Vout models	6	10	%
Temperature coefficient	Full load	±0.03		%/ °C
Ripple & Noise*	24Vout models	50	100	mV pk-pk
	others	30	75	mV pk-pk

* Ripple and Noise are measured at 20MHz bandwidth. Please refer to the application note for specific details.

Isolation Specification

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, 1mA max	>3000		VDC
Resistance	Input to output resistance at 500Vdc	>1000		MOhm
Capacitance	Input to output, 100KHz/0.1V	20		pF

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	Full load, nominal input voltage	270		KHz
Operating temperature	See derating graph	-40 to +105		°C
Storage temperature		-55 to +125		°C
Case temperature rise	Ambient temp 25°C, 3.3Vout models	25		°C
	Ambient temp 25°C, others	15		°C
Reflow Temperature	Maximum duration ≤60s over 217°C.		245	°C
Lead-free reflow solder process	IPC/JEDEC J-STD-020D.1			
Short circuit protection	Continuous, auto-recovery			
Cooling	Free air convection			
Vibration	10-150Hz, 5G, 0.75mm, along all axis			
Humidity	Non-condensing		95	% RH
Case material	Heat resistant black Plastic (flammability to UL 94V-0)			
Weight		1.6		g
Dimensions (L x W x H)	0.60 x 0.45 x 0.29inches (15.24 x 11.40 x 7.25mm)			
MTBF	> 3 500 000 hrs (MIL-HDBK -217F, t=+25°C) / Full Load			
Moisture sensitivity level (MSL)	IPC/JEDEC J-STD-020D.1	Level 1		

All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.


Safety Specifications

Parameters		
Standards	Design to meet IEC62368-1/UL62368-1/EN62368-1	
	EMC - Conducted and radiated emission	CISPR32/EN55032, Class B the recommended EMI circuit
	Electrostatic Discharge Immunity	IEC 61000-4-2 Air ±8KV, Contact ±4KV, Criteria B

Typical Characteristic


3.3Vout models

Tolerance Envelope Graph

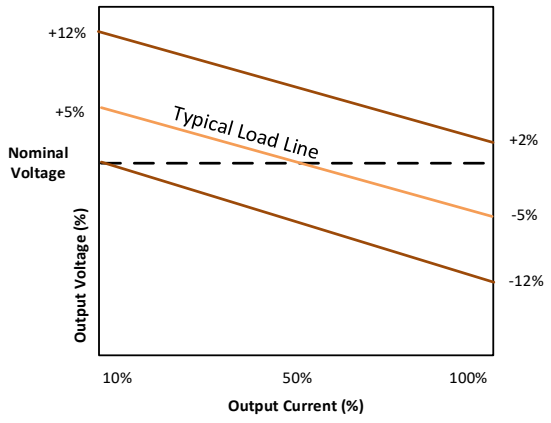


Others


Tolerance Envelope Graph

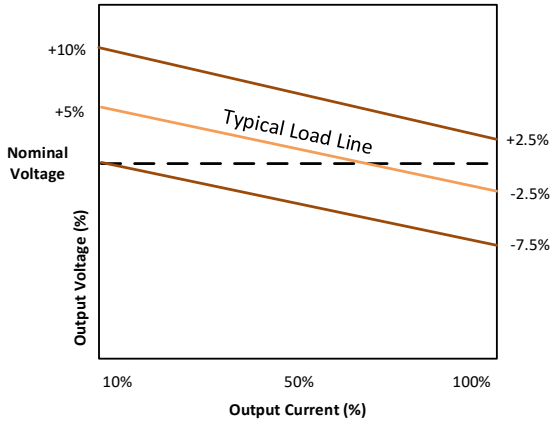

Derating

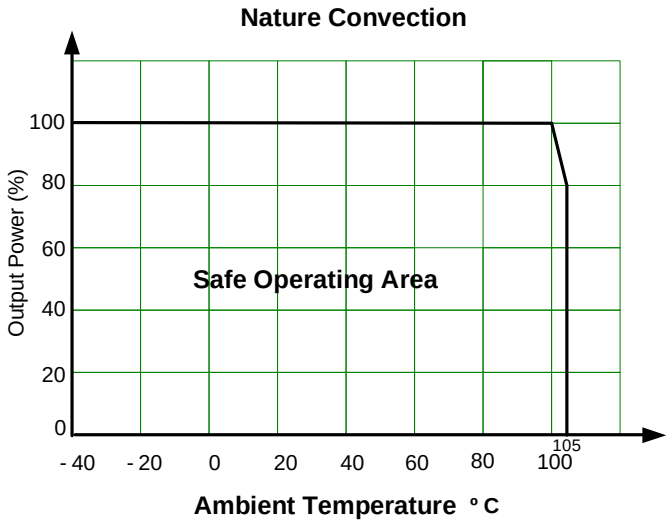


Typical Application Circuit

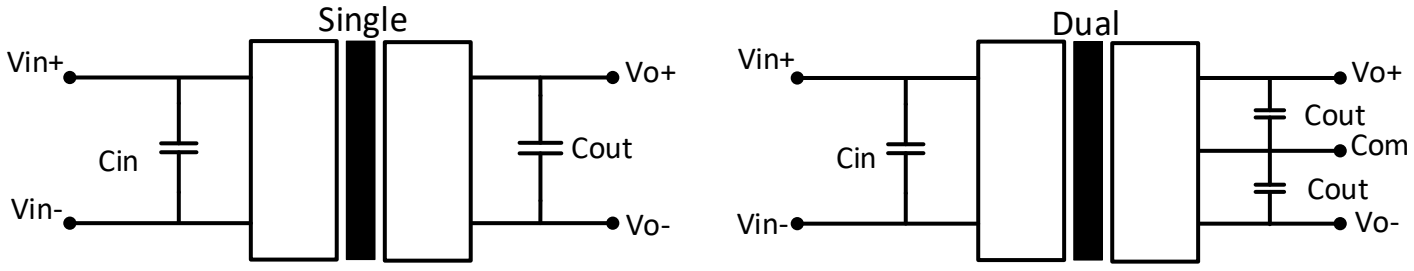


Cin	Vout	Cout
4.7 µF/16V	3.3 V	10µF/16V
	5 V	10µF/16V
	9 V	4.7µF/16V
	12 V	2.2µF/25V
	15 V	1µF/25V
	24V	0.47µF/50V

EMI Recommended Circuit

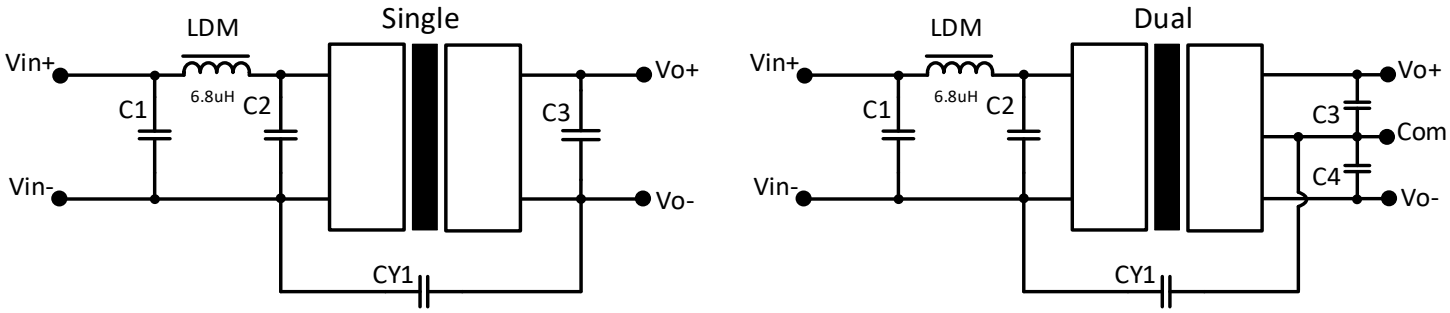

Output voltage	C1/C2	C3/C4	CY1
3.3V	4.7µF/50V	Refer to Cout in typical circuit	N/C
5V			N/C
9V			1nF/4KV
12V			1nF/4KV
15V			1nF/4KV
24V			1nF/4KV

Dimensions

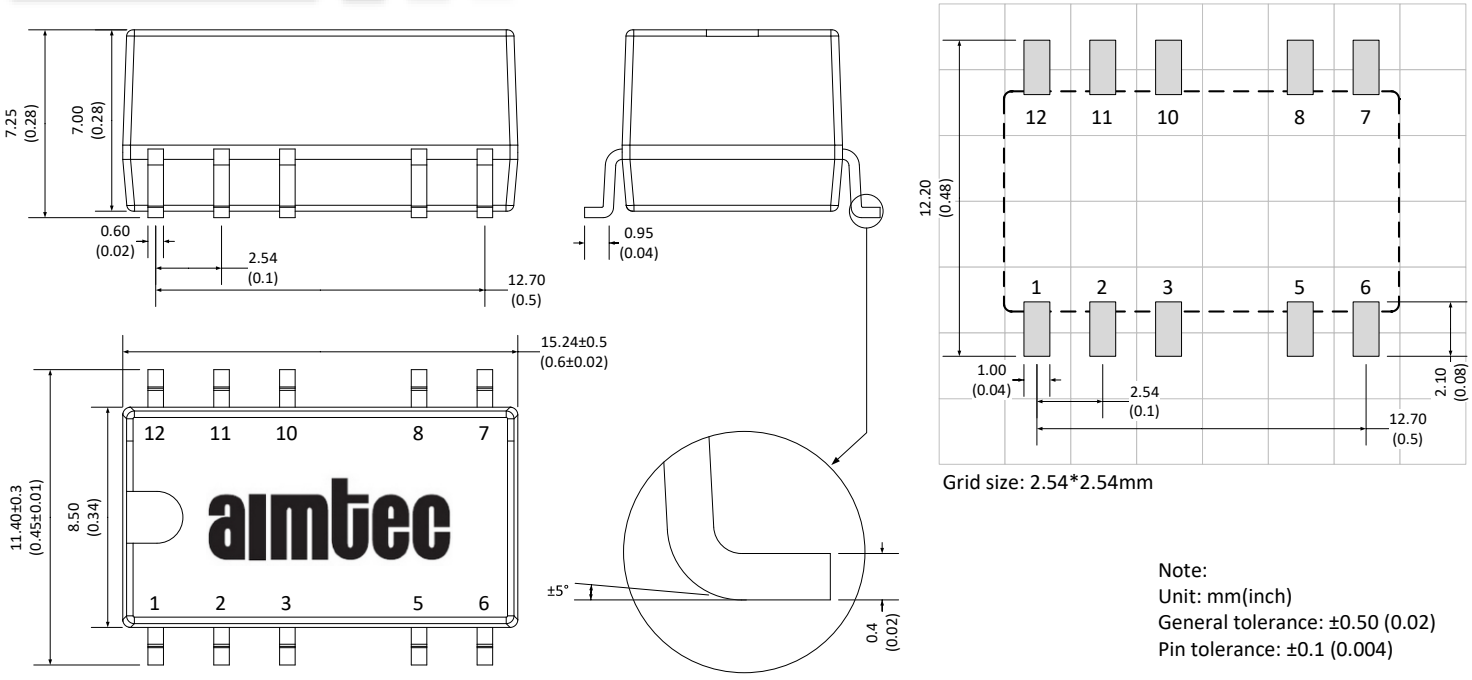

Grid size: 2.54*2.54mm

Note:
Unit: mm(inch)
General tolerance: ±0.50 (0.02)
Pin tolerance: ±0.1 (0.004)

Pin Out Specifications		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
5	-V Output	Common
6	NC	-V Output
8	+V Output	+V Output
Other Pins	NC	NC
NC: Pin to be isolated from circuitry		

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.