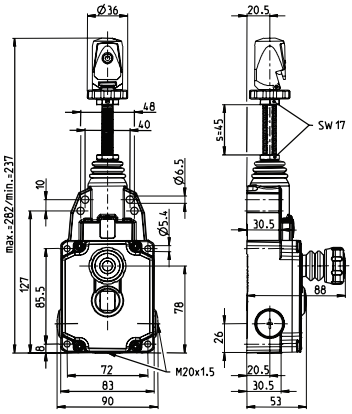
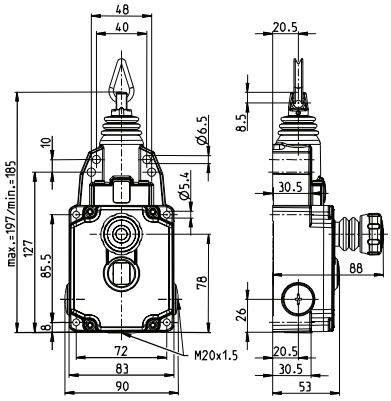
Altech Corp.® by BERNSTEIN

SRM Safety Rope Pull Switches

Max. span length	Quick Fix Cable Mounting		Cable Ring Cable Mounting	
				
	2 NC/2 NO	**3 NC/1 NO**	**2 NC/2 NO**	**3 NC/1 NO**
123 Ft. (37.5 Meters)	**601.2929.085** SRM-U1Z/U1Z-QF-175	**601.2999.094** SRM-A2Z/U1Z-QF-175	**601.2921.089** SRM-U1Z/U1Z-LU-175	**601.2991.098** SRM-A2Z/U1Z-LU-175
246 Ft. (75 Meters)	**601.2929.087** SRM-U1Z/U1Z-QF-300	**601.2999.096** SRM-A2Z/U1Z-QF-300	**601.2921.091** SRM-U1Z/U1Z-LU-300	**601.2991.100** SRM-A2Z/U1Z-LU-300
123 Ft. (37.5 Meters) with remote monitoring	**601.2929.086** SRM-U1Z/U1Z-QF-175-E	**601.2999.095** SRM-A2Z/U1Z-QF-175-E	**601.2921.090** SRM-U1Z/U1Z-LU-175-E	**601.2991.099** SRM-A2Z/U1Z-LU-175-E
246 Ft. (75 Meters) with remote monitoring	**601.2929.088** SRM-U1Z/U1Z-QF-300-E	**601.2999.097** SRM-A2Z/U1Z-QF-300-E	**601.2921.092** SRM-U1Z/U1Z-LU-300-E	**601.2991.101** SRM-A2Z/U1Z-LU-300-E

Technical Information

Maximum Switching Voltage	240V	240V
Maximum Switching Amperage	10A	10A
B10d	0.2 Million	0.2 Million
Mechanical Service Life	1 x 10^5	1 x 10^5
Switching Frequency	≤ 20/min	≤ 20/min
Operating Temperature	–30 °C to +80 °C	–30 °C to +80 °C
Protection Rating	IP67	IP67
Utilization Category	AC-15, Ue/Ie 240V 3A; 120V/6A DC-13Ue/Ue 250V/0.27A; 125V/0.55A	AC-15, Ue/Ie 240V 3A; 120V/6A DC-13Ue/Ue 250V/0.27A; 125V/0.55A
Rate Insulation Voltage	250VAC	250VAC
Approvals		

Drawing dimensions in mm