

Clamp-type Test Probe
0.64 mm system

Altech Corp.® by HIRSCHMANN® Test & Measurement

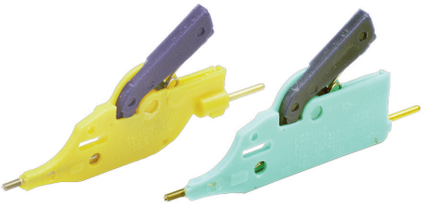



Type	**KLEPS FP 2B**	**KLEPS 064 PCH**
	Makes it possible to contact QFPIC s from 0.5 to 0.8 mm lead pitch. Supplied in pairs (yellow and green). The slim build of the clip make it possible to test QFPIC s with several clips simultaneously. Can be plugged with MKL- and MAL measuring leads.	The small weight and the compact design offer the possibility to use it at very small components. Can be plugged with MKL (...) and MAL (...) measuring leads.
Clamping range	0.5 - 0.8 mm	1 mm
Clamp type	Micro grip jaws	contact hook
PART NO. / Housing color	**974101188** ●●	**974201100** ●
		974201101 ●
		974201102 ●
		974201103 ●
		974201104 ●
		974201106 ●
		974201107 ○
Technical data		
Type of termination	unsprung pin Ø 0.73 mm	unsprung pin 0.64 mm
Rated voltage	30 VAC / 60 VDC	30 VAC / 60 VDC
Measurment cat. acc. to IEC61010	CAT I	CAT I
Rated current*		
Contact resistance		
Material Specifications		
Contact material	spring steel	contact hook: copper-beryllium, pin: phosphor bronze
Contact surface material	nickel	gold
Housing material	ABS	
Environmental conditions		
Temperature range	0 °C to +60 °C	0 °C to +70 °C
Inflamability class		
Housing (basic material)		

Drawing

Measurements are shown in millimeters.
Multiply by 0.03937 to convert to inches.

