

AVERY DENNISON MARKETING SPECIFICATION

© 2019 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED


HISTORY		
REV.	DATE	DESCRIPTION
A	9/13/19	INITIAL RELEASE

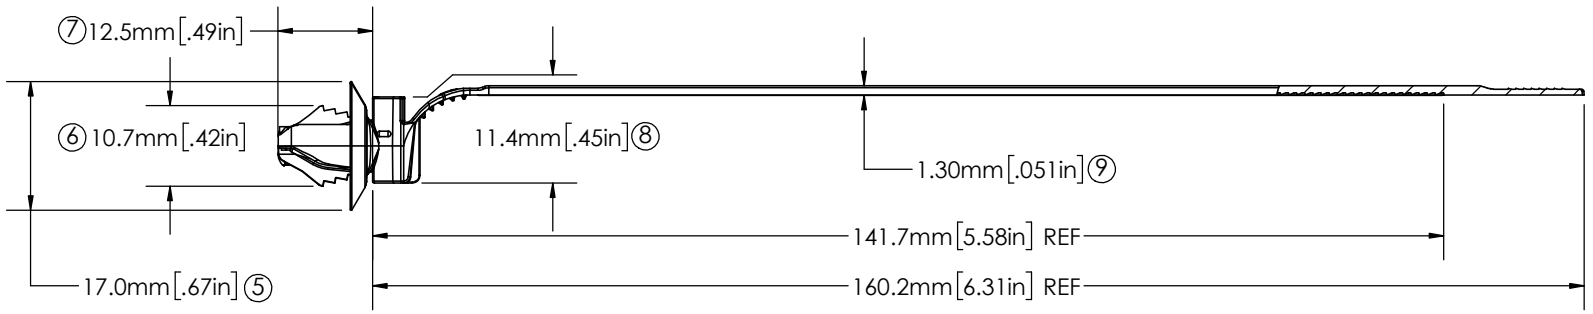

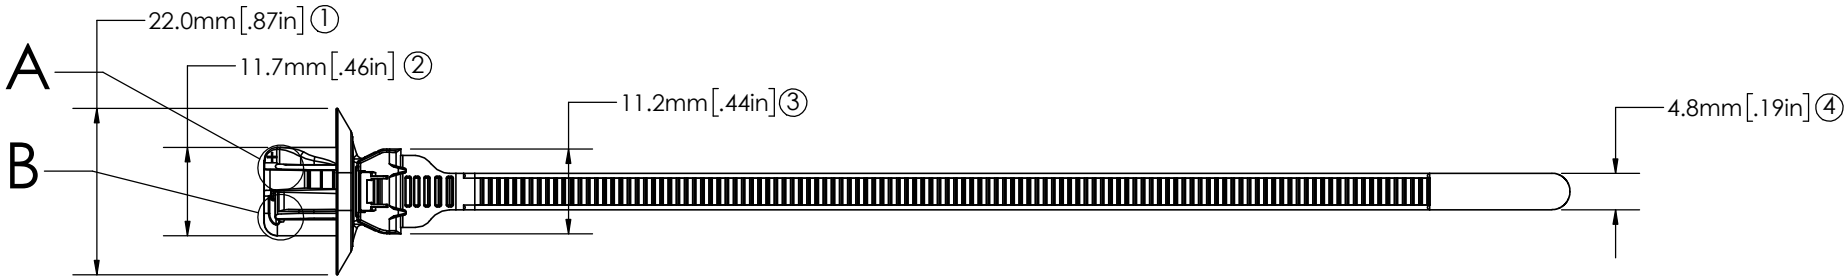

NOTES:

1. △ = INDICATES SPECIAL CHARACTERISTIC
2. ALL PARTS HAVE ONE OF TWO DIFFERENT IDENTIFIERS TO DISTINGUISH FROM SIMILAR SIZE OVAL ARROW TIES.

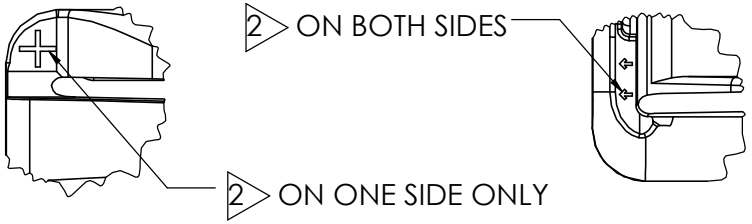

DETAIL A
SCALE 4 : 1

DETAIL B
SCALE 4 : 1

⑩ △	FLAMMABILITY:	HB RATED PER FMVSS302
⑪ △	TENSILE STRENGTH:	50 lbf / 222N MIN.
	MOUNTING:	6.2mm X 12.2 mm SLOTTED HOLE. 7.0mm X 12.0 mm SLOTTED HOLE. THICKNESS OF 0.6mm TO 3.0mm
	OPERATING TEMP RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE
	WEIGHT:	1.9g
	BUNDLE DIAMETER:	∅1.6mm TO ∅38.0mm
	TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS:

ENG. APPR. *Bert Uschold* 9.13.19

Q.A. APPR. *Caitlin Vaillancourt* 9.13.19

AVERY DENNISON
FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

SPECIFIED TOLERANCES ARE:

.XX ± .03 INCHES .X ± .7 mm

.XXX ± .010 INCHES .XX ± .25 mm

ANGULAR: ± 2°

MATERIAL **NYLON 6/6, IMPACT MOD, HEAT STABILIZED**

COLOR **BLACK**

DESCRIPTION **OVAL ARROW TIE, 6.2x12.2**

STOCK NO. **20179-0**

REV. **A**

5 4 3 2 1