BeStar	SPECIFICATION FOR DYNAMIC Speaker			
	TOTAL PAGE	06	www.bestargroups.com	

Preliminary Specification For The Acoustic Characteristics of dynamic Speaker

Customer		Model Name	BLS22-11B-04H6.7 LF
Customer P/N		Product No.	
Date	20 Oct. 17	Issue No.	BS/TES01.XXXXA
Page	01 of 06	Issue Date	2017/10/20

Approval：

1.Technical Terms
2.Drawing
3.Reliability Test
4.Packing
5.History Change Record

Drawn by	Checked by	Approved by	Customer approved

BESTAR HOLDING CO.,LTD
No.199 HuangHe West Road,New district,ChangZhou,JiangSu Province,P.R.China
Tel: +86 519 88222567 ***Fax:*** +86 519 88222551
E-mail:wu@be-star.com ***http://www.bestargroups.com***


BLS22-11B-04H6.7 LF



1.Technical Terms

No.	Item	Specification
1.	Impedance(at 2.0kHz)	4 ±15%Ω
2.	Rated Input Power	2.0W
3.	Maximum Input Power	2.5W
4.	Resonance Frequency	300 ±20%Hz
5.	Frequency Response	F0 ～10KHz
6.	Output SPL	78± 3dB （0.5m/1W Ave at 0.8 , 1.0 , 1.2 , 1.5KHz）
7.	THD	＜10%（at 1KHz/1.0W/0.5m）
8.	Buzzes & Rattles	must be normal at sine wave 2.0W from 300~20KHz
10.	Operating Temperature	-20...+65 °C
11.	Storage Temperature	-30...+70 °C

1.2 Test Method

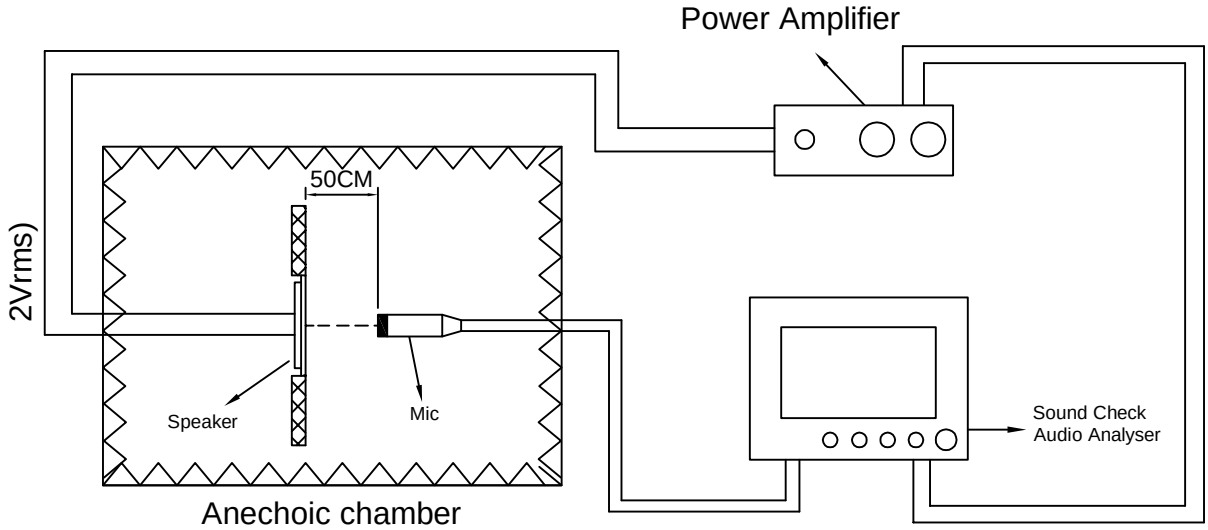


This print and information there in are proprietary to BeStar Holding Co., Ltd. and shall not be used in whole or in part without its written content


				Date:	2017/10/20	BLS22-11B-04H6.7 LF
				Drawn by:	张翔捷	
A	2017/10/20	张翔捷		Checked by:	王 平	Speaker
Rev.	Date	Drawn	Note	Approved by:	徐金国	
BESTAR HOLDING CO.,LTD				www.bestargroups.com wu@be-star.com		DRG NO:BS/TES01.XXXXA / Page:02 of 06

BLS22-11B-04H6.7 LF

1.3 Frequency Response Curve (only for reference)

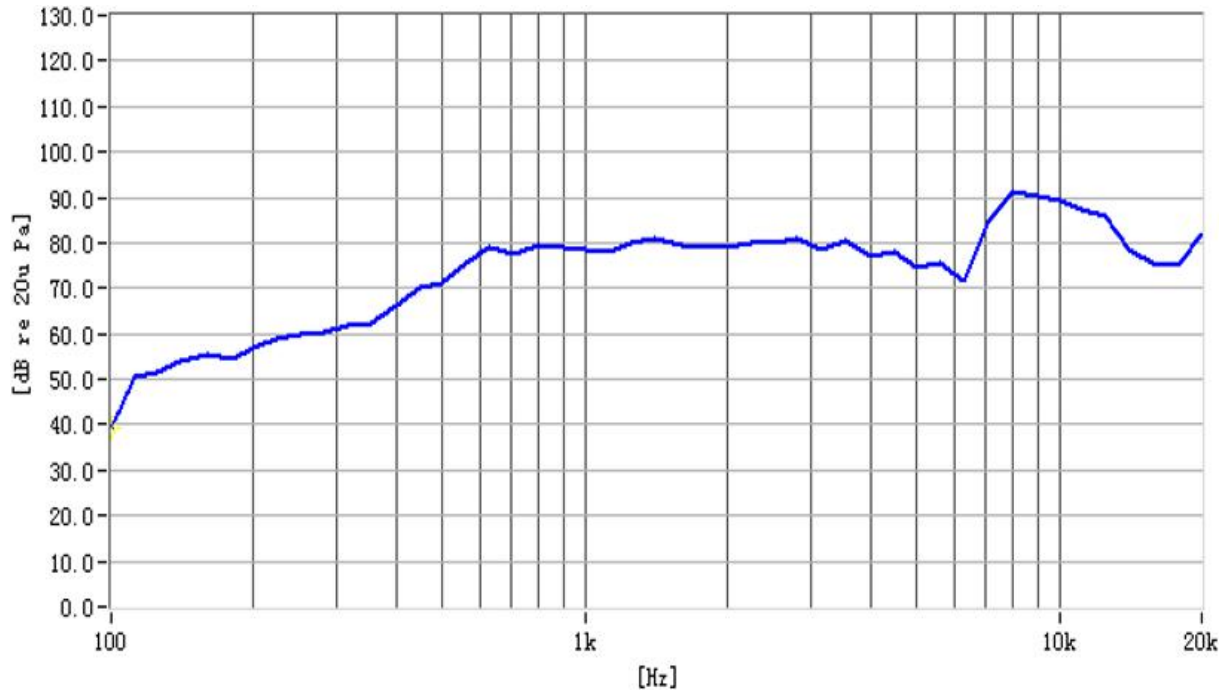

2.Drawing

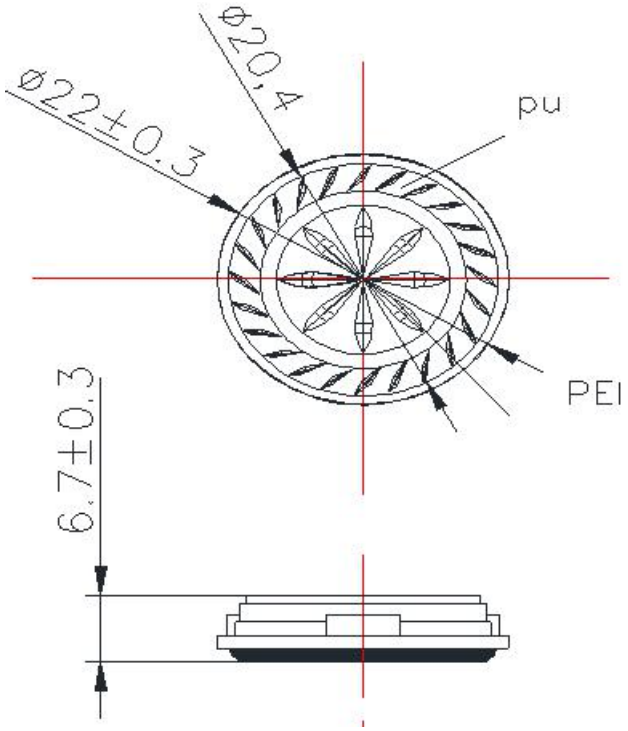

Unit:mm
Tolerance:±0.5

				Date:	2017/10/20	BLS22-11B-04H6.7 LF
				Drawn by:	张翔捷	
A	2017/10/20	张翔捷		Checked by:	王 平	Speaker
Rev.	Date	Drawn	Note	Approved by:	徐金国	
BESTAR HOLDING CO.,LTD www.bestargroups.com wu@be-star.com					DRG NO:BS/TES01.XXXXA	Page:03 of 06

This print and information there in are proprietary to BeStar Holding Co., Ltd. and shall not be used in whole or in part without its written content

BLS22-11B-04H6.7 LF

3. Reliability Test

3.1 Load Test

Power	2W white noise
Duration	96hrs

3.2 High Temperature Test

Temperature	+70±3℃
Duration	96hrs

3.3 Low Temperature Test


Temperature	-20±3 ℃
Duration	96hrs

3.4 Damp Heat

Temperature	40±3℃
Relative Humidity	90%-95%RH
Duration	96hrs

3.5 Temperature Cycle Test

Cycle	5

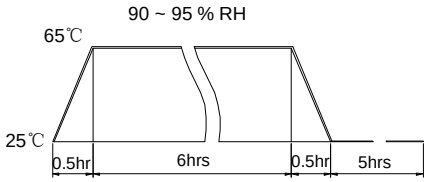

3.6 Drop Test

Height	75cm (in state of packing)
Times	10 (Drop onto hardwood board)

Notice:

1.All these tests above should be measured after leaving normal temperature for 2hrs.

2.sensitivity difference at 1kHz shall be within ±3dB from initial value after test.

3.The gluing on the speaker wires must fully cover the terminals

				Date:	2017/10/20	BLS22-11B-04H6.7 LF
				Drawn by:	张翔捷	
A	2017/10/20	张翔捷		Checked by:	王 平	Speaker
Rev.	Date	Drawn	Note	Approved by:	徐金国	
BESTAR HOLDING CO.,LTD www.bestargroups.com wu@be-star.com					DRG NO:BS/TES01.XXXXA	Page:04 of 06

This print and information there in are proprietary to BeStar Holding Co., Ltd. and shall not be used in whole or in part without its written content

BLS22-11B-04H6.7 LF

4. Packing

TBD

This print and information there in are proprietary to BeStar Holding Co., Ltd. and shall not be used in whole or in part without its written content

				Date:	2017/10/20	BLS22-11B-04H6.7 LF
				Drawn by:	张翔捷	
A	2017/10/20	张翔捷		Checked by:	王　平	Speaker
Rev.	Date	Drawn	Note	Approved by:	徐金国	
BESTAR HOLDING CO.,LTD www.bestargroups.com wu@be-star.com						DRG NO:BS/TES01.XXXXA / Page:05 of 06

BLS22-11B-04H6.7 LF

5. History change record

version No.	Change Items		Date	Drawn	Approved
	Before	After			
A			17/10/20	张翔捷	徐金国

This print and information there in are proprietary to BeStar Holding Co., Ltd. and shall not be used in whole or in part without its written content

				Date:	2017/10/20	BLS22-11B-04H6.7 L
				Drawn by:	张翔捷	
A	2017/10/20	张翔捷		Checked by:	王 平	Speaker
Rev.	Date	Drawn	Note	Approved by:	徐金国	
BESTAR HOLDING CO.,LTD				www.bestargroups.com wu@be-star.com		DRG NO:BS/TES01.XXXXA / Page:06 of 06