MARKETING SALES DRAWING

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [ ]



Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.



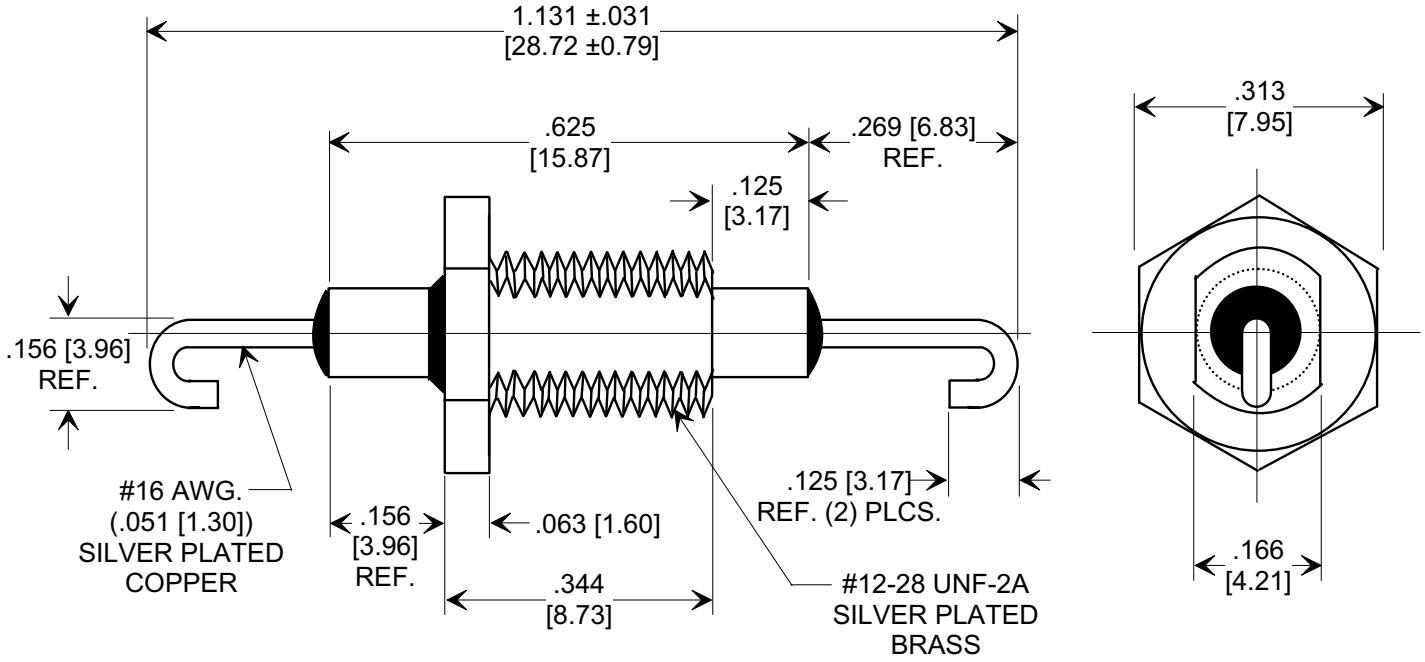

SPECIFICATIONS	
CAPACITANCE	2300 pF
CAP. TOL.	+ 80, -20%
TEMP. COEF.	X5U
WORKING VOLTAGE	500 VDC @ +85°C
TEMP. RANGE	-55°C TO +85°C
CURRENT (A)	20
I.R. MIN. @ 100 VDC	10 G Ω
DWV @ 2 SEC. MIN.	875 VDC

NOTES:
1. TUSONIX STANDARD PART NUMBER: 357-000-X5U0-232Z.
   TUSONIX RoHS COMPLIANT PART NUMBER:
   357-000-X5U0-232Z LF.
   CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. PART MARKING: COLOR CODE DOTS, CAPACITANCE AND TEMP. CHAR. ON TOP OF BUSHING HEX.
   RoHS PART: WITH ADDITIONAL GREEN DOT ON TUBE AS IDENTIFIER..
3. SUPPLIED WITH SILVER PLATED HEX NUT.

X-2015 Rev-0

REVISION RECORD		
0	Original Release C.O. **19990106-1-01**	ADDED METTRIC, CURRENT, IR, DWV & ORIENTATION. SILVER PLATED WAS TINNED. S.M. 02-24-03
1	**20030225-2-01**	ADDED NOTES 1 & 2. S.M. 02-17-06
2	**20060202-9-02**	

--TOLERANCES--
Unless Otherwise Specified
DECIMAL ± .015 [0.38]
ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title **BUSHING TYPE FEED-THRU CAPACITOR**

Drawn S.M. 01-08-99 | Scale 4 X

Approved J.Mc. 01-08-99

A **357-000-X5U0-232Z**