


MARKETING SALES DRAWING


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC [ ]

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.





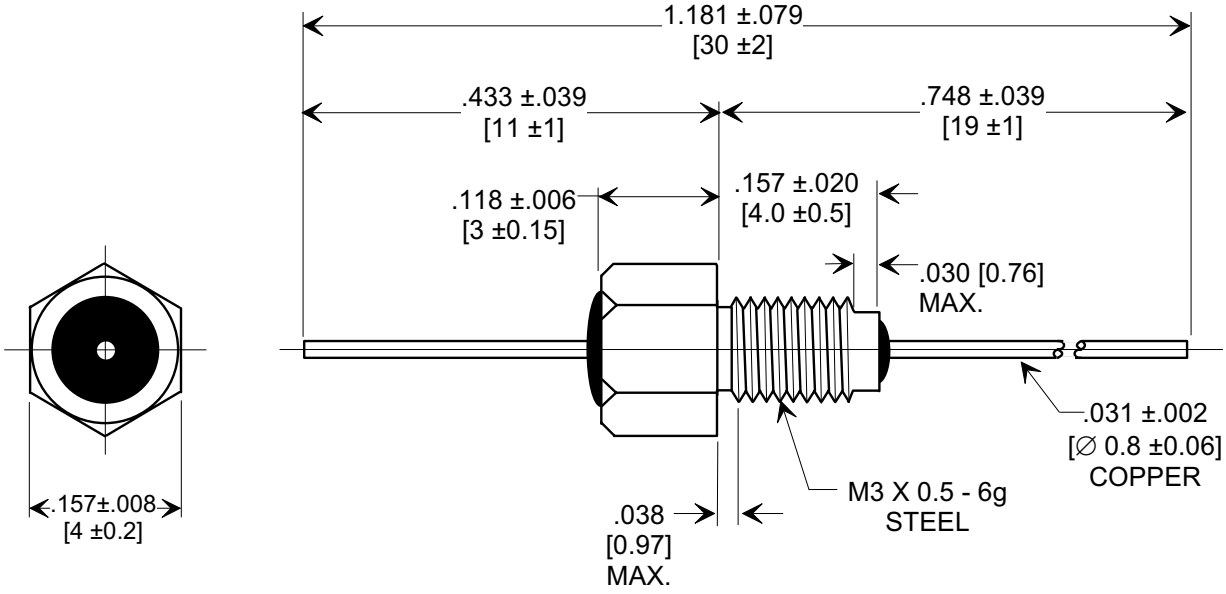

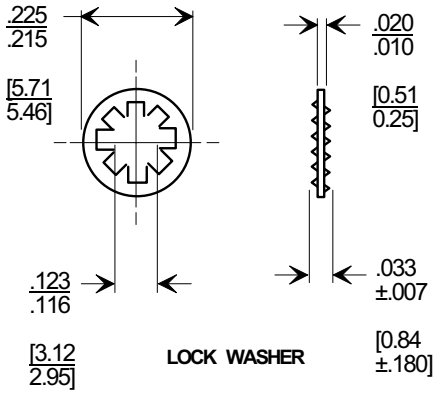

NOTES:
1. OPERATING TEMP. RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD AND LOCK WASHER.
3. MAX. RECOMMENDED MOUNTING TORQUE : 0.23 Nm.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260° C. SEE INSTALLATION RECOMMENDATIONS.
5. TUSONIX STANDARD PART NUMBER: 4400-084.
   TUSONIX RoHS COMPLIANT PART NUMBER: 4400-084 LF.
   CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
6. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS.
   STANDARD PART: BLACK INK. RoHS PART: GREEN INK.

CAP.(pf)	TOLERANCE	DC WORKING VOLTAGE		DC CURRENT (AMPS)	I.R. MIN. @ 100 (VDC)	DWV (VDC)	MIN. NO LOAD INSERTION LOSS (db) @ 25°C PER MIL-STD-220				
		85°C	125 °C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
1,000	GMV	300	200	10	10 G Ω	500	----	5	20	35	45

REVISION RECORD

	Original Release C.O.	WAS SK 7517-000. S.M. 10-09-98	
0	**19980929-3-02**	REVISED NOTE 5 & ADDED NOTE 6. S.M. 07-19-05	
1	**20050714-6-02**	ADDED IR. S.M. 12-01-05	
2	**20051128-1-05**		

--TOLERANCES--
Unless Otherwise Specified

DECIMAL ± NOTED

ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title
BUSHING STYLE EMI FILTER

Drawn S.M. 07-21-98

Approved J.Mc. 07-21-98

A **4400-084**

X-2015 Rev-0