

MARKETING SALES DRAWING


This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC [ ]

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.





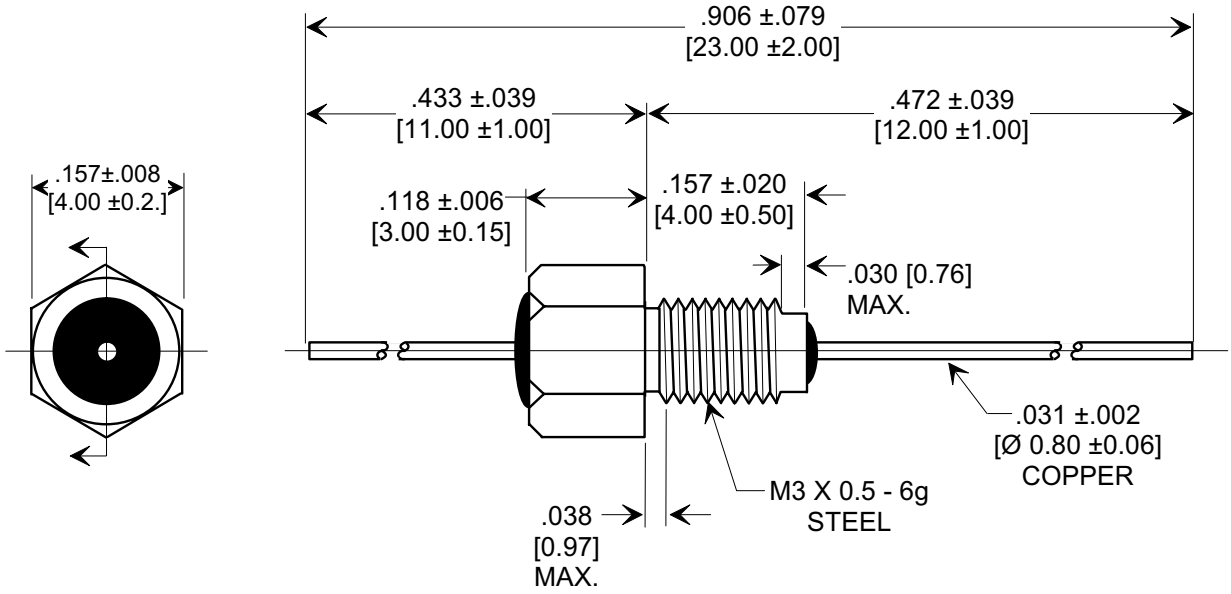

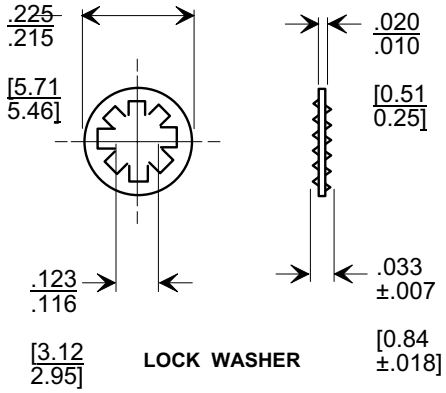

NOTES:
1. OPERATING TEMP. RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD, AND MOUNTING HARDWARE.
3. MAX. RECOMMENDED MOUNTING TORQUE : 2.0 in. lb. [0.23 Nm]
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260° C. SEE INSTALLATION RECOMMENDATIONS.
5. LOCK WASHER INCLUDED.
6. TUSONIX STANDARD PART NUMBER: 4400-682. TUSONIX RoHS COMPLIANT PART NUMBER: 4400-682 LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
7. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: DARK GREEN INK FOR IDENTIFICATION.

CAP.(pf)	TOL.	DC WORKING VOLTAGE		DC CURRENT (AMPS)	I.R. MIN. @ 100 (VDC)	DWV (VDC)	MIN. NO LOAD INSERTION LOSS (db) @ 25°C PER MIL-STD-220				
		85°C	125 °C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
5	MAX.	300	200	10	10 G Ω	500	----	----	----	----	----

REVISION RECORD					
Original Release		WAS SK 7452-000. SM 03-03-98	0	ADDED & REVISED NOTES. ADDED IR & DWV. SM 03-03-98	1
C.O.		19980224-6-02		20060123-9-03	

X-2015 Rev-0

--TOLERANCES--
Unless Otherwise Specified
DECIMAL ± NOTED
ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title
LINE FEED - THRU

Drawn S.M. 02-23-98
Approved J.Mc. 02-23-98

A | 4400-682