


TOP VIEW

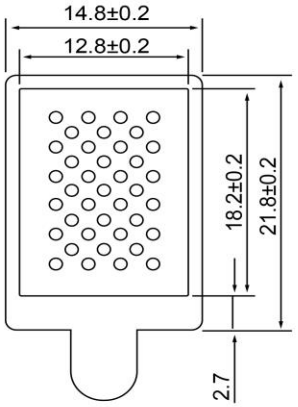

SIDE VIEW

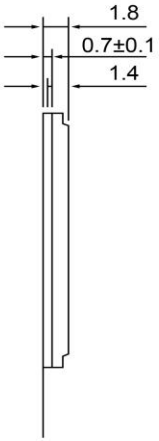

BOTTOM VIEW



Specifications		
Description	**Value**	**Unit**
Shape	Rectangle	
Resonant Frequency	1,000	(Hz)
Frequency Range	1,000 ~ 20,000	(Hz)
SPL @ 10cm	86	(dBA)
Capacitance	600	(nF)
Diaphragm Material	Piezo	
Rated Voltage	7	(Vrms)
Max Input Voltage	9	(Vrms)
Mount Type	Flush mount	
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-30 ~ +85	°C
Weight	1	(g)

Notes

1) All dimensions are in mm unless otherwise noted
2) All parts meet RoHS

DB UNLIMITED

Revision History

Version	Description	Date	Approved
1	Released from Engineering	3/24/2015	J.S.

Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	3/14/2015	P.D.	3/23/2015	J.S.	3/21/2015

Piezo Speaker

SZ211006-1

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.

sales@dbunlimitedco.com | www.dbunlimitedco.com
©2013, DB Unlimited