
Description

The 74AHCT1G00Q is an automotive compliant single, two-input positive NAND gate with a standard push-pull output. The device is designed for operation with a power supply range of 4.5V to 5.5V. The gate performs the positive Boolean function:

$$Y = \overline{A \bullet B} \quad \text{or} \quad Y = \overline{A} + \overline{B}$$

Pin Assignments

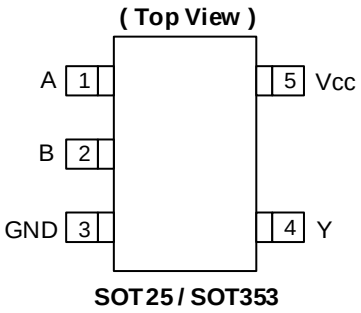

SOT25 / SOT353

Features

- Grade 1 Ambient Temperature Operation: -40°C to +125°C
- Supply Voltage Range from 4.5V to 5.5V
- ±8mA Output Drive at 5.0V
- CMOS Low-Power Consumption
- High Noise Immunity
- Inputs Not Limited by V_{CC}
- Balanced Propagation Delays
- Balanced Drive Capability
- ESD Protection Tested per AEC-Q100
- Exceeds 2000V Human Body Model (AEC-Q100-002)
- Exceeds 1000V Charged Device Model (AEC-Q100-011)
- Latch-Up Exceeds 100mA (AEC-Q100-004)
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **The 74AHCT1G00Q is suitable for automotive applications requiring specific change control; this part is AEC-Q100 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.**
  https://www.diodes.com/quality/product-definitions/

Applications

- General purpose logics
- Wide array of products, such as:
  - Automotive applications within grade 1 temperature range
  - Industrial computing/controls/automations
  - High reliability networking/communications
  - Industrial/Agricultural equipment


Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

© 2024 Copyright Diodes Incorporated. All Rights Reserved.

Pin Descriptions

Pin Name	Description
A	Data Input
B	Data Input
GND	Ground
Y	Data Output
V_{CC}	Supply Voltage

Logic Diagram



Function Table

Inputs		Output
A	**B**	**Y**
H	H	L
L	X	H
X	L	H

Absolute Maximum Ratings (Notes 4 & 5)

Symbol	Description	Rating	Unit
ESD HBM	Human Body Model ESD Protection	2	kV
ESD CDM	Charged Device Model ESD Protection	1	kV
V_{CC}	Supply Voltage Range	-0.5 to 6.5	V
V_I	Input Voltage Range	-0.5 to 6.5	V
V_O	Voltage Applied to Output in High or Low State	-0.5 to V_{CC} + 0.5	V
I_{IK}	Input Clamp Current $V_I < 0$	-20	mA
I_{OK}	Output Clamp Current ($V_O < 0$ or $V_O > V_{CC}$)	±20	mA
I_O	Continuous Output Current (V_O = 0 to V_{CC})	±25	mA
I_{CC}	Continuous Current Through V_{CC}	75	mA
I_{GND}	Continuous Current Through GND	-75	mA
T_J	Operating Junction Temperature	-40 to +150	°C
T_{STG}	Storage Temperature	-65 to +150	°C
P_D	Total Power Dissipation (Note 6)	250	mW

Notes:
4. Stresses beyond the absolute maximum can result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.
5. Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum voltage. The ratings of both current and voltage must be maintained within the controlled range.
6. This will need to be derated at higher operating temperatures to prevent exceeding maximum T_J. Refer to package thermal characteristics section.

© 2024 Copyright Diodes Incorporated. All Rights Reserved.

Recommended Operating Conditions (Note 7)

Symbol	Parameter		Min	Max	Unit
V_{CC}	Operating Voltage	—	4.5	5.5	V
V_{IH}	High-Level Input Voltage	V_{CC} = 5V ± 0.5V	2.0	—	V
V_{IL}	Low-Level Input Voltage	V_{CC} = 5V ± 0.5V	—	0.8	V
V_I	Input Voltage		0	5.5	V
V_O	Output Voltage		0	V_{CC}	V
I_{OH}	High-Level Output Current	V_{CC} = 5V ± 0.5V	—	-8	mA
I_{OL}	Low-Level Output Current	V_{CC} = 5V ± 0.5V	—	8	mA
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate	V_{CC} = 5V ± 0.5V	—	20	ns/V
T_A	Ambient Temperature	—	-40	+125	°C

Note: 7. Unused inputs should be held at V_{CC} or Ground.

Electrical Characteristics (All typical values are at V_{CC} = 5V, T_A = +25°C.)

Symbol	Parameter	Test Conditions	Vcc	+25°C			-40°C to +85°C		-40°C to +125°C		Unit
				Min	Typ	Max	Min	Max	Min	Max	
V_{OH}	High Level Output Voltage	$V_I = V_{IH}$ or V_{IL} I_{OH} = -50μA	4.5V	4.4	4.5	—	4.4	—	4.4	—	V
		$V_I = V_{IH}$ or V_{IL} I_{OH} = -8mA	4.5V	3.94	—	—	3.8	—	3.70	—	V
V_{OL}	Low Level Output Voltage	$V_I = V_{IH}$ or V_{IL} I_{OL} = 50μA	4.5V	—	0	0.1	—	0.1	—	0.1	V
		$V_I = V_{IH}$ or V_{IL} I_{OL} = 8mA	4.5V	—	—	0.36	—	0.44	—	0.55	V
I_I	Input Current	V_I = 5.5V or GND	0V to 5.5V	—	—	±0.1	—	±1	—	±2	μA
ΔI_{CC}	Additional Supply Current	Per input pin, V_I = 3.4V, Other inputs at V_{CC} or GND, I_O = 0	5.5V	—	—	1.35	—	1.5	—	1.5	mA
I_{CC}	Supply Current	V_I = 5.5V or GND I_O = 0	5.5V	—	—	1	—	10	—	40	μA
C_I	Input Capacitance	$V_I = V_{CC}$ or GND	5.5V	—	1.5	10	—	10	—	10	pF

© 2024 Copyright Diodes Incorporated. All Rights Reserved.

Package Characteristics

Symbol	Parameter	Package	Test Conditions	Min	Typ	Max	Unit
θ_{JA}	Thermal Resistance Junction-to-Ambient	SOT25	Note 8	—	184	—	°C/W
		SOT353		—	385	—	
θ_{JC}	Thermal Resistance Junction-to-Case	SOT25	Note 8	—	62	—	°C/W
		SOT353		—	164	—	

Note: 8. Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.

Switching Characteristics

V_{CC} = 5V ± 0.5V (See Figure 1, Typical Values at V_{CC} = 5V.)

Parameter	From (Input)	To (Output)	Test Conditions	+25°C			-40°C to +85°C		-40°C to +125°C		Unit
				Min	Typ	Max	Min	Max	Min	Max	
t_{PD}	A or B	Y	C_L = 15pF	1.0	3.6	6.2	1.0	7.1	1.0	8.0	ns
			C_L = 50pF	1.0	5.0	7.9	1.0	9.0	1.0	10.0	ns


Operating Characteristics

T_A = +25°C


Parameter		Test Conditions	V_{CC} = 5V Typ	Unit
C_{PD}	Power Dissipation Capacitance	f = 1MHz No Load	10	pF

© 2024 Copyright Diodes Incorporated. All Rights Reserved.


Measurement Information



VCC	Inputs			Output	CL
	VI	tR/tF	VM	VM	
5V±0.5V	GND to VCC	≤3ns	1.5V	VCC/2	15pF
5V±0.5V	GND to VCC	≤3ns	1.5V	VCC/2	50pF

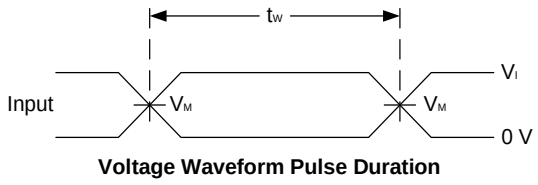

Voltage Waveform Pulse Duration

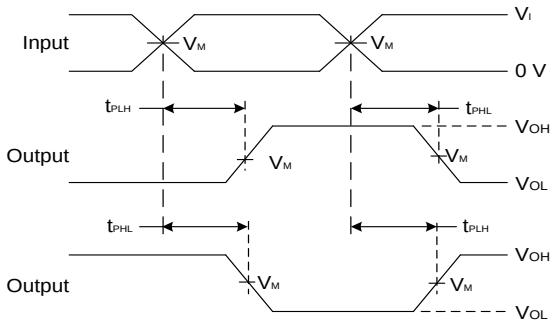


Voltage Waveform Propagation Delay Times
Inverting and Non-Inverting Outputs

Figure 1. Load Circuit and Voltage Waveforms

Notes:
A. Includes test lead and test apparatus capacitance.
B. All pulses are supplied at pulse repetition rate ≤ 1MHz.
C. Inputs are measured separately one transition per measurement.
D. t_{PLH} and t_{PHL} are the same as t_{PD}.

© 2024 Copyright Diodes Incorporated. All Rights Reserved.

Ordering Information (Note 9)

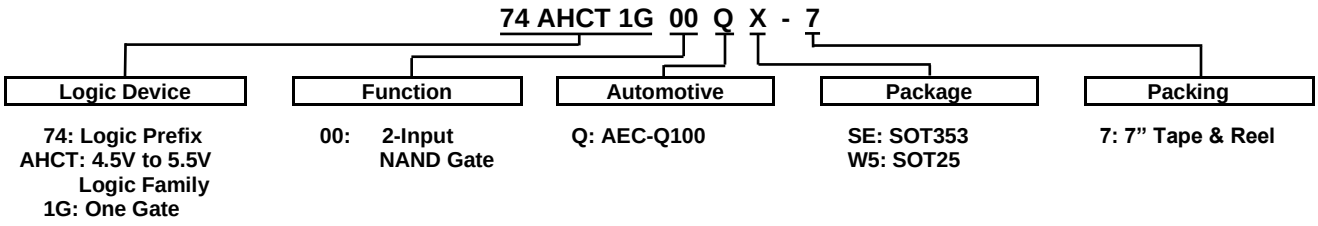


Part Number	Package Code	Package (Notes 10 & 11)	Package Size	Packing	
				Qty.	Carrier
74AHCT1G00QSE-7	SE	SOT353	2.15mm × 2.1mm × 1.1mm 0.65mm Lead Pitch	3000	7" Tape and Reel
74AHCT1G00QW5-7	W5	SOT25	3.0mm × 2.8mm × 1.2mm 0.95mm Lead Pitch	3000	7" Tape and Reel

Notes: 9. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.
10. Pad layout as shown in Diodes Incorporated's package outline PDFs, which can be found on our website at http://www.diodes.com/package-outlines.html.
11. The taping orientation is located on our website at https://www.diodes.com/assets/Packaging-Support-Docs/ap02007.pdf.

Marking Information

(Top View)



SOT25 / SOT353

XXX: Identification Code
Y : Year 0 to 9
W: Week: A to Z 1 to 26 Week
a to z 27 to 52 Week
z Represents Week 52 and 53
X: A to Z: Internal Code


Part Number	Package	Identification Code
74AHCT1G00QW5-7	SOT25	ZRQ
74AHCT1G00QSE-7	SOT353	ZRQ

© 2024 Copyright Diodes Incorporated. All Rights Reserved.

Package Outline Dimensions


Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SOT25

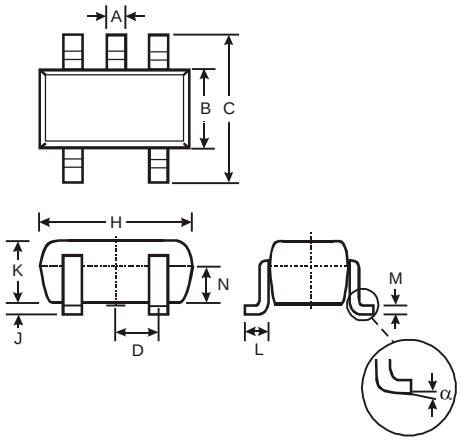

SOT25			
Dim	**Min**	**Max**	**Typ**
A	0.35	0.50	0.38
B	1.50	1.70	1.60
C	2.70	3.00	2.80
D	-	-	0.95
H	2.90	3.10	3.00
J	0.013	0.10	0.05
K	1.00	1.30	1.10
L	0.35	0.55	0.40
M	0.10	0.20	0.15
N	0.70	0.80	0.75
α	0°	8°	-
All Dimensions in mm			

(2) Package Type: SOT353

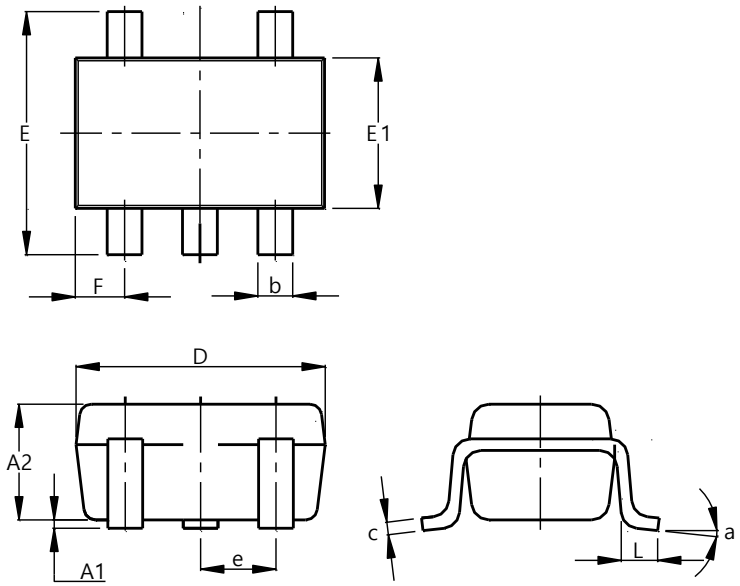


SOT353			
Dim	**Min**	**Max**	**Typ**
A1	0.00	0.10	0.05
A2	0.90	1.00	0.95
b	0.10	0.30	0.25
c	0.10	0.22	0.11
D	1.80	2.20	2.15
E	2.00	2.20	2.10
E1	1.15	1.35	1.30
e	0.650 BSC		
F	0.40	0.45	0.425
L	0.25	0.40	0.30
a	0°	8°	--
All Dimensions in mm			

© 2024 Copyright Diodes Incorporated. All Rights Reserved.

Suggested Pad Layout


Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SOT25



Dimensions	Value
Z	3.20
G	1.60
X	0.55
Y	0.80
C1	2.40
C2	0.95

(2) Package Type: SOT353

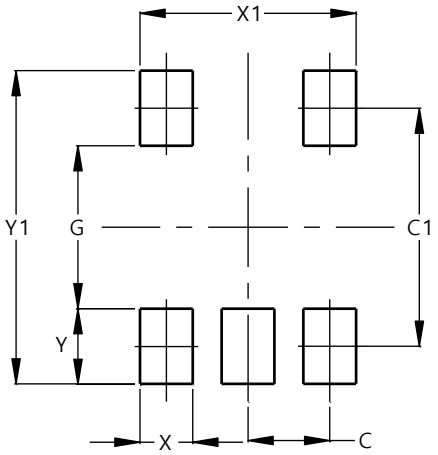

Dimensions	Value (in mm)
C	0.650
C1	1.900
G	1.300
X	0.420
X1	1.720
Y	0.600
Y1	2.500

Mechanical Data

SOT25

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 e3
- Weight: 0.0158 grams (Approximate)

SOT353

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 e3
- Weight: 0.0064 grams (Approximate)

© 2024 Copyright Diodes Incorporated. All Rights Reserved.

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.

3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.

4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.

5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.

7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.

8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

9. This Notice may be periodically updated with the most recent version available at https://www.diodes.com/about/company/terms-and-conditions/important-notice

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.
All other trademarks are the property of their respective owners.
© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com

© 2024 Copyright Diodes Incorporated. All Rights Reserved.