
Your Expert Partner for **Human Machine Interfaces**

Actuator

704.041.6

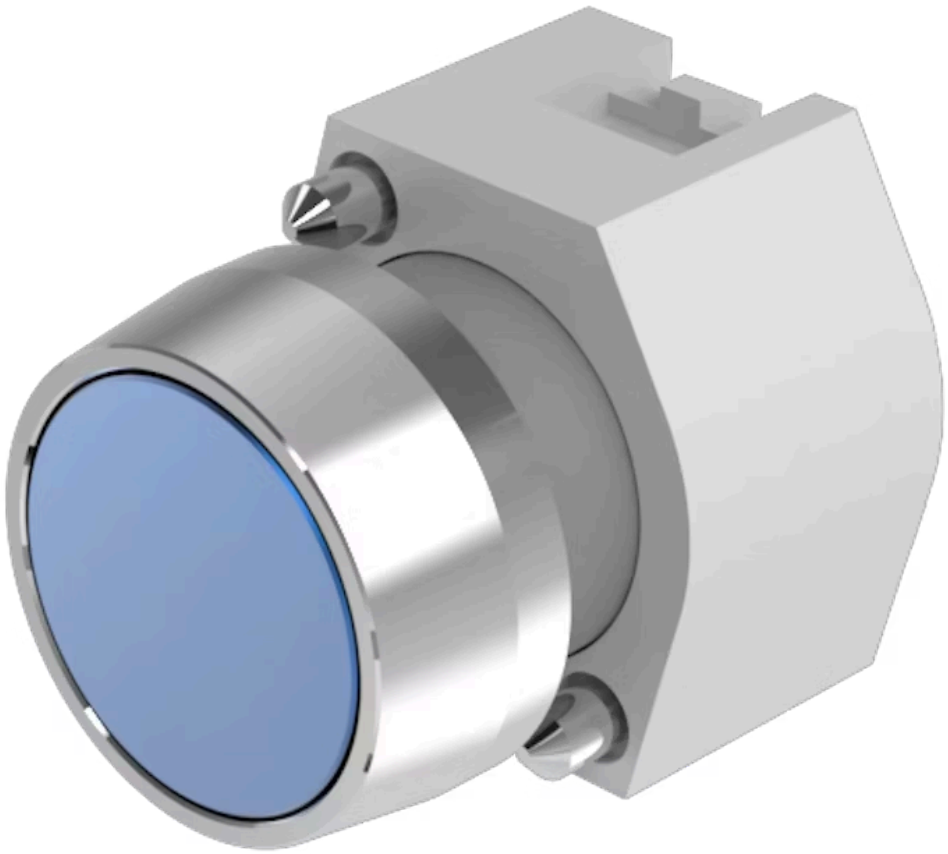

https://eao.com/p/704.041.6

Your product:



704.041.6
Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	round
Front bezel colour:	Nature
Front bezel material:	Aluminium

MOUNTING

Design:	raised
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Blue
Lens material:	Aluminium
Lens illumination:	non illuminative
Lens shape:	flush
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the “Standards for low-voltage switching devices” DIN EN 60947-1

MECHANICAL CHARATERISTIC

Switching action:	Maintained
Mechanical lifetime:	≤3 Mio. cycles of operation

Operating force:	8 N
Operating Travel:	ca. 5.8 mm ± 0.2 mm
Weight:	0.04 kg

AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C


CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER


Short Description:	Actuator, Ø 29 mm, flush, non illuminative, Blue, Aluminium, opaque, round, Nature, Aluminium, anodised, Maintained
Housing colour:	Grey
Housing material:	Plastic
Hints:	Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator,Max. 3 switching elements can be clipped on
max. number of switching elements:	3
Wiring diagrams:	

Mounting cut-outs:

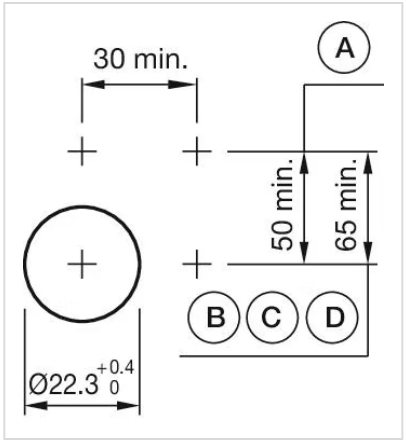

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:

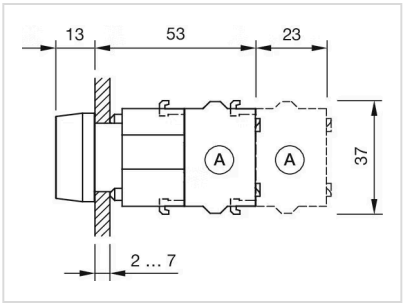

A = Screw terminal

Where to Buy

	Distributor	Quantity in Stock	
DigiKey	Digi-Key	19 in stock	Buy
MOUSER ELECTRONICS	Mouser Electronics	0 in stock	Buy
RS	RS Americas	0 in stock	Buy
Newark AN AVNET COMPANY	Newark Electronics	0 in stock	Buy
SAGER ELECTRONICS	Sager	0 in stock	Buy

Powered by oemsecrets.com