RF Filters for Cellular Phones

Series/Type: B4168

The following products presented in this data sheet are being withdrawn.


Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39202B4168U410	B39202B4150U410	2009-04-03	2009-07-15	2009-10-15

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.

Ceramic package **DCC6C**

Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Usable passband 60 MHz
- No matching network required for operation at 50 Ω
- Suitable for GPRS class 1 to 12
- Ceramic Package for **S**urface **M**ounted **T**echnology (**SMT**)

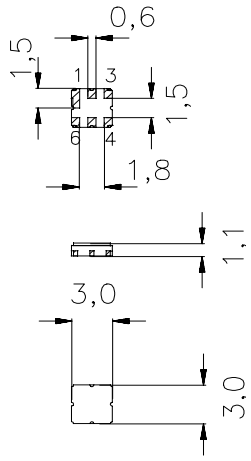


Dimensions in mm, approx. weight 0,037 g

Terminals

- Ni, gold-plated

Pin configuration

2	Input
1, 3	Input - ground
5	Output
4, 6	Output - ground



Type	Ordering code	Marking and Package according to	Packing according to
B4168	B39202-B4168-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic **S**ensitive **D**evice (**ESD**)

Maximum ratings

Operable temperature range	T	– 30/+ 75	°C	
Storage temperature range	T_{stg}	– 40/+ 85	°C	
DC voltage	V_{DC}	3	V	
Input power at				
GSM850, GSM900	P_{IN}	15	dBm	peak power of GSM signal,
GSM1800, GSM1900	P_{IN}	12	dBm	duty cycle 4:8
Tx bands				

Data Sheet SMD

Characteristics

Operating temperature range: T = +25 +- 2°C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω


		min.	typ.	max.	
Center frequency	f_c	—	1960,0	—	MHz
Maximum insertion attenuation	α_{max}				
1930,0 ...1990,0 MHz		—	2,7	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ...1990,0 MHz		—	1,4	2,2	dB
Input VSWR					
1930,0 ...1990,0 MHz		—	1,9	2,1	
Output VSWR					
1930,0 ...1990,0 MHz		—	1,9	2,1	
Attenuation	α				
10,0 ...1850,0 MHz		23,0	25,0	—	dB
1850,0 ...1910,0 MHz		10,5	14,0	—	dB
2010,0 ...2070,0 MHz		10,5	15,0	—	dB
2070,0 ...2410,0 MHz		25,0	29,0	—	dB
2410,0 ...2910,0 MHz		33,0	37,0	—	dB
2910,0 ...4500,0 MHz		25,0	29,0	—	dB
4500,0 ...5000,0 MHz		20,0	26,0	—	dB
5000,0 ...6000,0 MHz		8,0	10,0	—	dB

Characteristics


Operating temperature range: T = -10 to +75°C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω

		min.	typ.	max.	
Center frequency	f_c	—	1960,0	—	MHz
Maximum insertion attenuation	α_{max}				
1930,0 ...1990,0 MHz		—	2,7	4,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ...1990,0 MHz		—	1,4	3,0	dB
Input VSWR					
1930,0 ...1990,0 MHz		—	1,9	2,1	
Output VSWR					
1930,0 ...1990,0 MHz		—	1,9	2,1	
Attenuation	α				
10,0 ...1850,0 MHz		23,0	25,0	—	dB
1850,0 ...1910,0 MHz		8,5	14,0	—	dB
2010,0 ...2070,0 MHz		8,5	15,0	—	dB
2070,0 ...2410,0 MHz		25,0	29,0	—	dB
2410,0 ...2910,0 MHz		33,0	37,0	—	dB
2910,0 ...4500,0 MHz		25,0	29,0	—	dB
4500,0 ...5000,0 MHz		20,0	26,0	—	dB
5000,0 ...6000,0 MHz		8,0	10,0	—	dB

Transfer function(Spec for 25°C)**:**

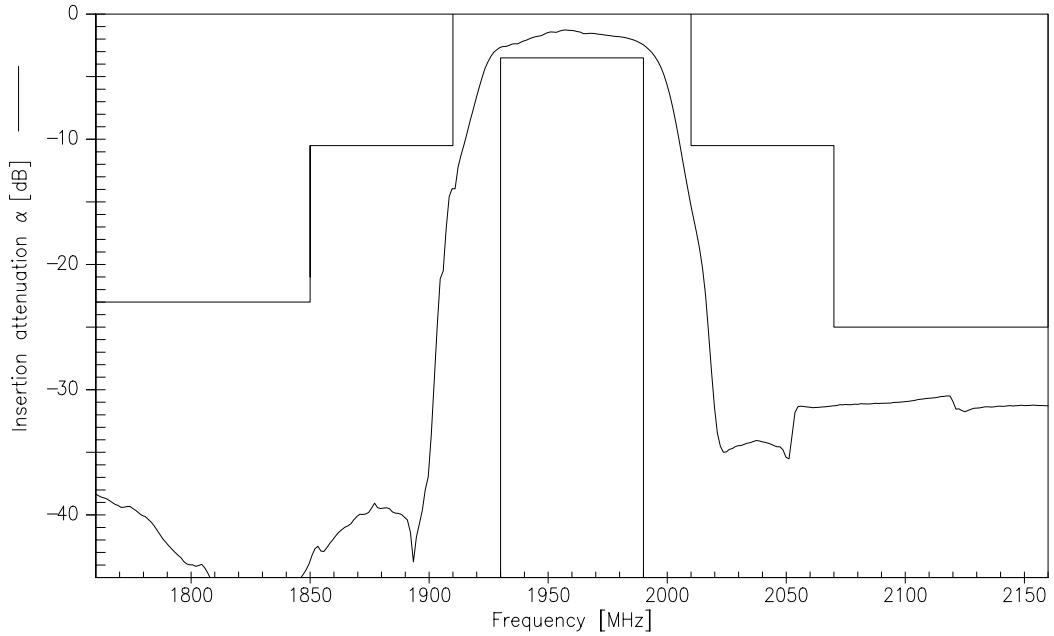


Transfer function(wideband)**:**

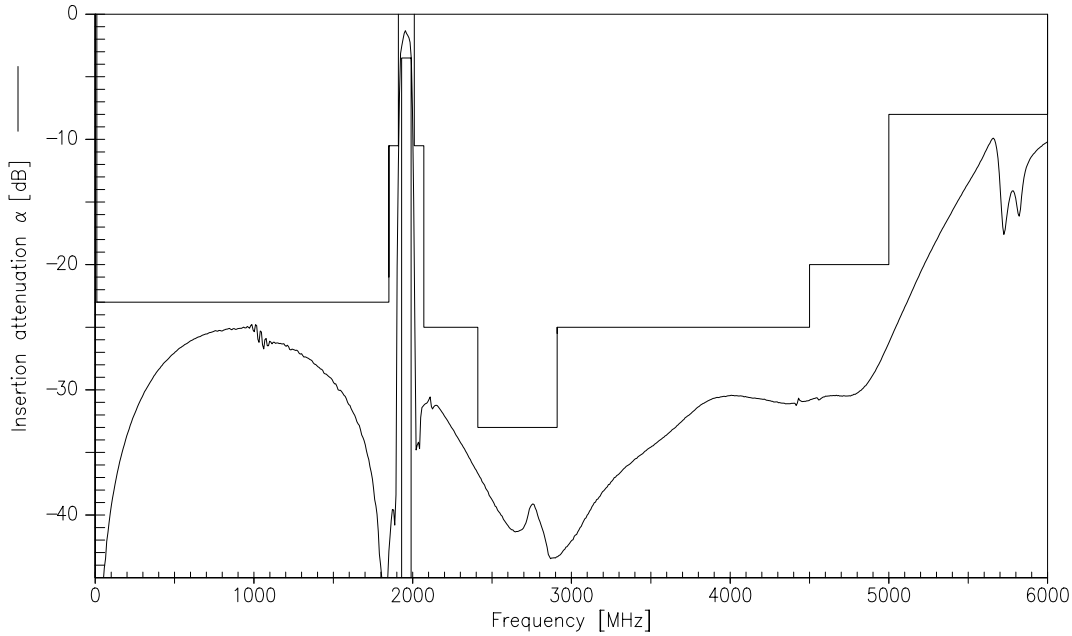


Reflection functions:

S_{11}

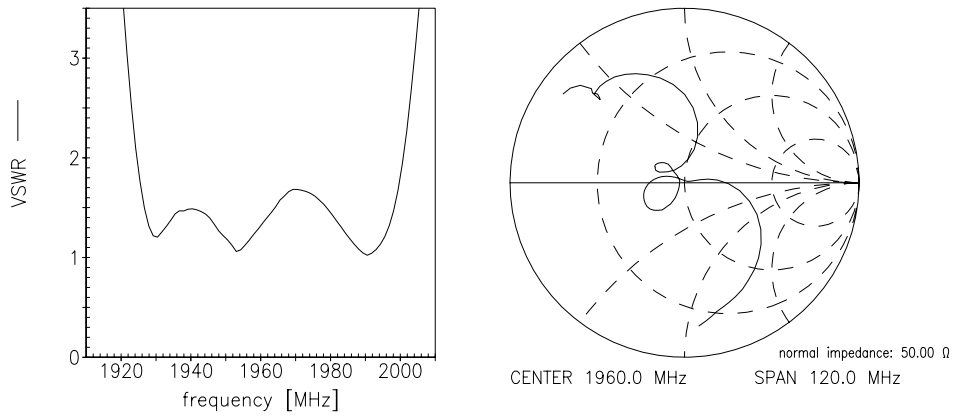

S_{22}

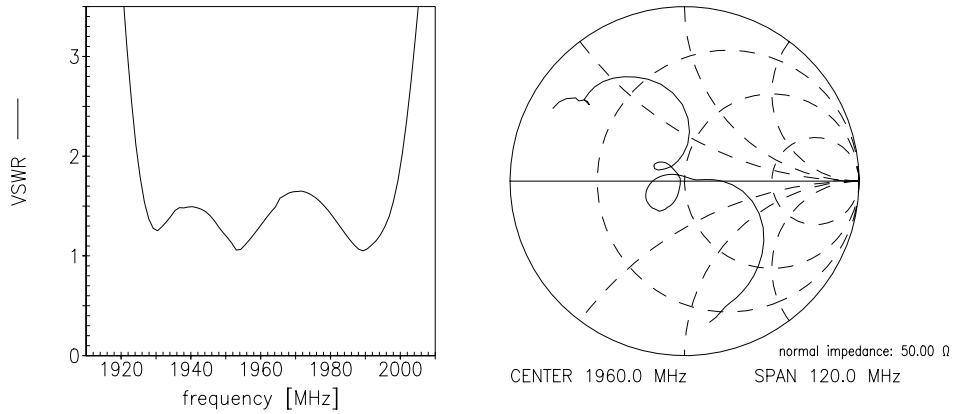

ublished by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.