EPCOS

SAW Components

Data Sheet L 9653 M



Data Sheet

Standard

Plastic package **SIP5K**

- L/L'

Features

- TV IF audio filter with two channels
- Channel 1 (L') with pass band for sound carrier at 40,40 MHz
- Channel 2 (L) with pass band for sound carrier at 32,40 MHz

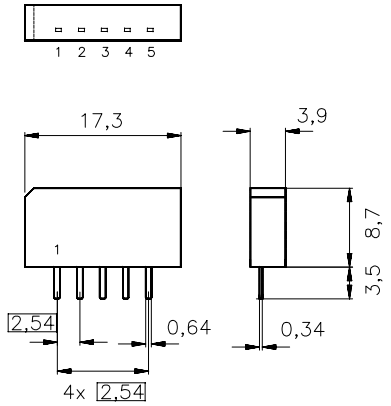

Dimensions in mm, approx. weight 1,0 g

Terminals

- Tinned CuFe alloy

Pin configuration

1	Input
2	Switching Input
3	Chip carrier - ground
4	Output
5	Output



Type	Ordering code	Marking and package according to	Packing according to
L 9653 M	B39389-L9653-M100	C61157-A1-A15	F61074-V8067-Z000

Maximum ratings

Operating temperature range	T_A	– 25/+ 65	˚C	
Storage temperature range	T_{stg}	– 40/+ 85	˚C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals

Characteristics of channel 1 (switching pin 2 connected to ground)

Reference temperature: T_A = 25 °C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 2 kΩ || 3 pF

				min.	typ.	max.	
Insertion attenuation			α				
Reference level for the following data		40,40 MHz		12,5	14,0	15,5	dB
Relative attenuation			α_{rel}				
Picture carrier		33,90 MHz		42,0	52,0	—	dB
		38,40 MHz		40,0	45,0	—	dB
Adjacent picture carrier		41,90 MHz		34,0	38,0	—	dB
Adjacent sound carrier		32,40 MHz		39,0	55,0	—	dB
Lower sidelobe	25,00 ...	33,90 MHz		35,0	41,0	—	dB
Upper sidelobe	41,90 ...	45,00 MHz		32,0	37,0	—	dB
Impedance at 40,40 MHz							
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$				—	0,4 ‖12,2	—	kΩ || pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$				—	0,5 ‖10,3	—	kΩ || pF
Temperature coefficient of frequency			TC_f	—	–72	—	ppm/K

Characteristics of channel 2 (switching pin 2 connected to pin 1)

Reference temperature: T_A = 25 °C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 2 kΩ || 3 pF

				min.	typ.	max.	
Insertion attenuation			α				
Reference level for the following data		32,40 MHz		12,2	13,7	15,2	dB
Relative attenuation			α_{rel}				
Picture carrier		38,90 MHz		45,0	61,0	—	dB
		34,40 MHz		33,0	37,0	—	dB
Adjacent picture carrier		30,90 MHz		46,0	58,0	—	dB
Adjacent sound carrier		40,40 MHz		37,0	47,0	—	dB
Lower sidelobe	25,00 ...	30,90 MHz		36,0	42,0	—	dB
Upper sidelobe	38,90 ...	45,00 MHz		35,0	41,0	—	dB
Impedance at 32,40 MHz							
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$				—	0,7 ‖16,0	—	kΩ || pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$				—	0,7 ‖13,9	—	kΩ || pF
Temperature coefficient of frequency			TC_f	—	–72	—	ppm/K

Frequency response of channel 1

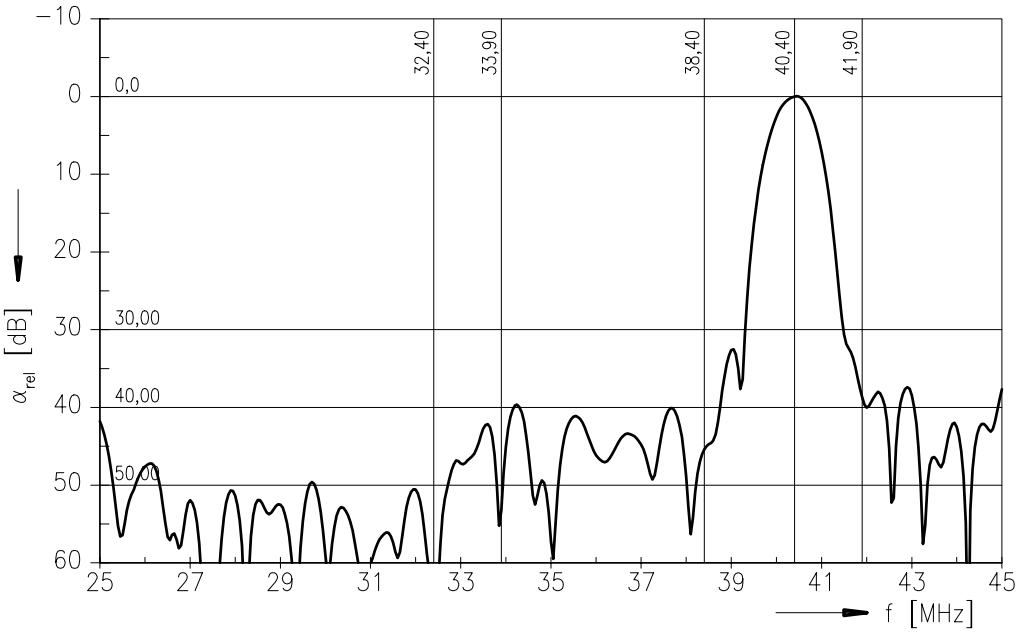

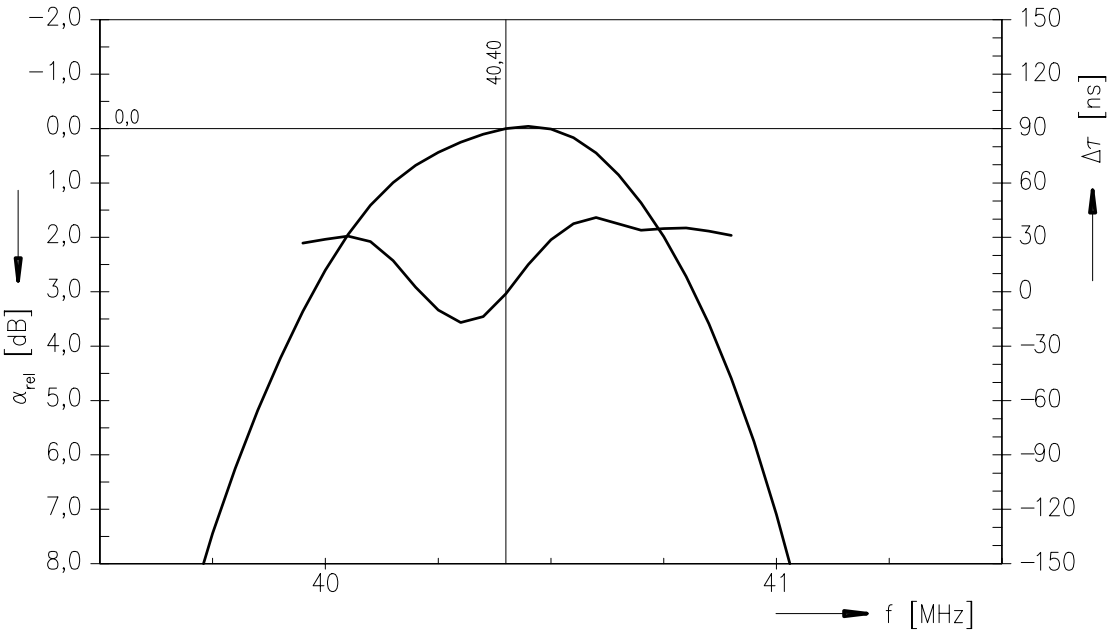

Frequency response of channel 2

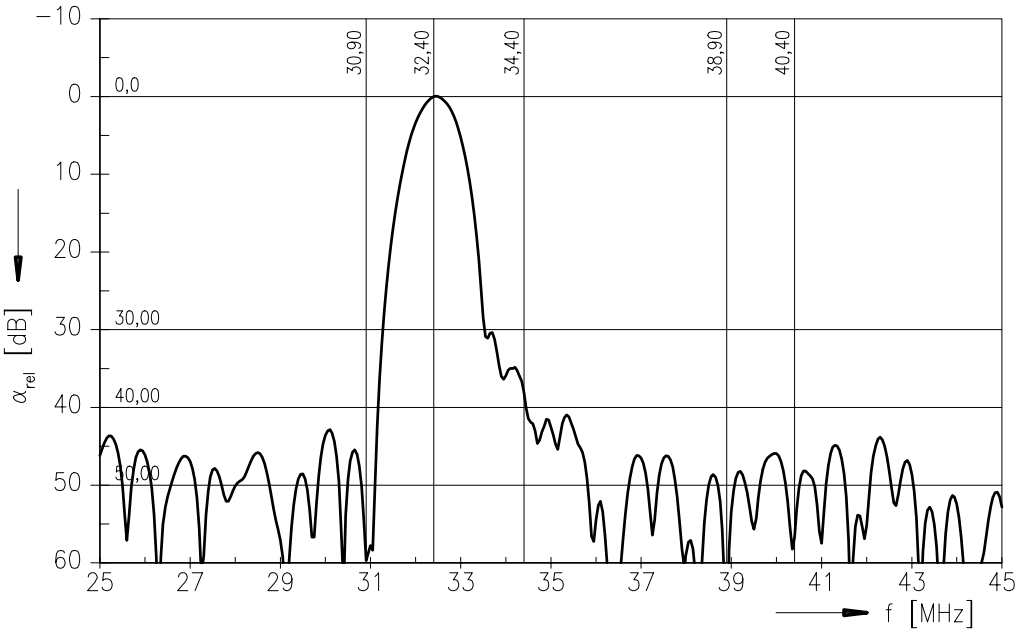

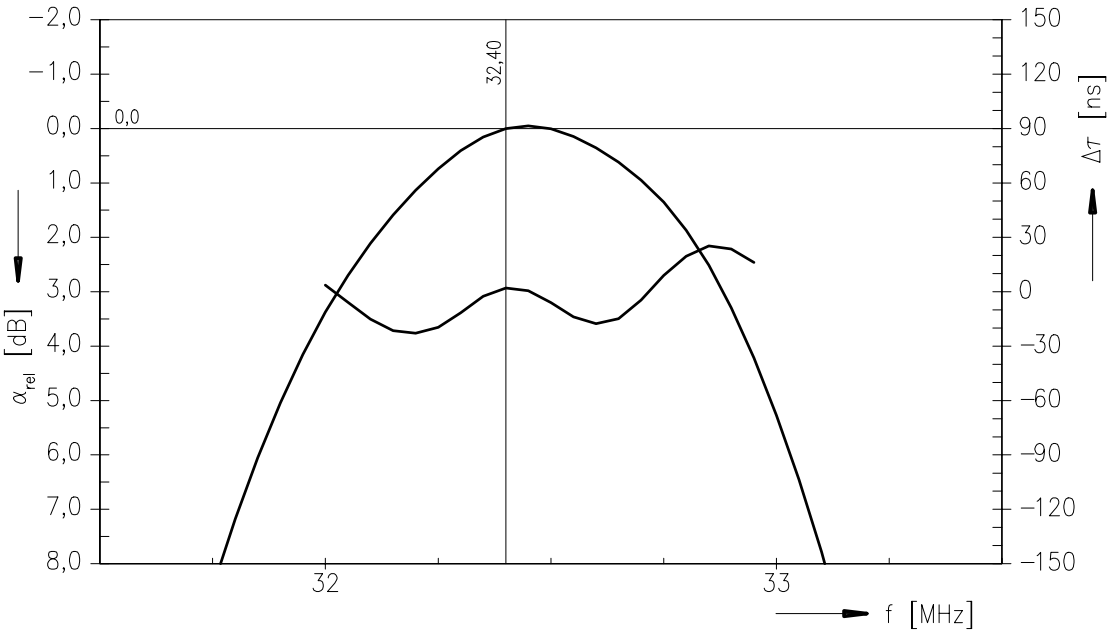

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW CE MM PD
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.
Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.