
EVERLIGHT AMERICAS

DATASHEET

Photo-link Light Transmitter Unit
EAPLTAA0



Features

- High speed signal transmission(16Mbps NRZ Signal)
- TTL interface compatible
- +3~+5V single power source
- The product itself will remain within RoHS compliant version.

Description

The opto-electrical component is assembled with a 660nm AlGaInP LED and a driver IC. It transforms the electrical signal to optical signal and be transmitted by 1mm diameter plastic optical fiber.
The component is operated at +3~+5V and has good performance at low dissipation current, steady light output and efficient light coupling.

Applications

- Digital audio equipment
- CD player
- DVD player

Device Selection Guide

Chip		Operating Voltage (Vcc)	Dissipation Current (mA)		Fiber Coupling Light Output (dBm)		
Material	λp(nm)		Typ.	Max.	Min.	Typ.	Max.
AlGaInP	660	+3.0~5.0	5.5	10	-21	---	-15

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 05.20.2013.
Issue No: DPL-0000148 Rev.2

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	-0.5 ~ +7.0	V
DC Input Voltage	Vin	-0.5 to Vcc+0.5	V
Storage Temperature	Tstg	-40 to 85	ºC
Operating Temperature	Topr	-20 to 85	ºC
Soldering Temperature	Tsol	260*	ºC
Human Body Model ESD	HBM	3K	V
Machine Model ESD	MM	300	V

Notes: Soldering time≦10 seconds.

Recommended Operating Conditions

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Supply Voltage	Vcc	-	2.7	3.0	5.50	V

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Peak Emission Wavelength	λp		640	660	680	nm
Transmission Rate		NRZ Signal	DC	-	16	Mbps
Fiber Coupling Output Power	Pf	* Measuring Method 1	-21	-	-15	dBm
Dissipation Current	Icc	* Measuring Method 1	3	-	10	mA
High Level Input Voltage	Vih		2	-	-	V
Low Level Input Voltage	Vil		-	-	0.8	V
Rise Time	Tr	[1] ; *2 NRZ Code VFLED = 2.0V	-	15	20	ns
Fall Time	Tf		-	15	20	ns
Low to High Delay Time	tpLH	* Measuring Method 2	-	-	100	ns
High to Low Delay Time	tpHL	* Measuring Method 2	-	-	100	ns
Pulse Width Distortion	Δtw	* Measuring Method 2	-15	-	15	ns
Jitter	Δtj	* Measuring Method 2	-	1.5	15	ns

*Note 1 : All Plastic Optical Fiber（980/1000um）


Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 05.20.2013.

*Circuit Layout Notice:
When power is off, it must be cut off together in Vin and Vcc pin.
If it only has Vcc power-off, LED will sure to be no output power.


Vcc	Vin	LED Condition
2.7~5.5V	High	ON
2.7~5.5V	Low	OFF
2.7~5.5V	FLOATING	OFF
FLOATING	0~Vcc	OFF

Measuring Method

*1 Measuring method of optical output coupling fiber and dissipation current

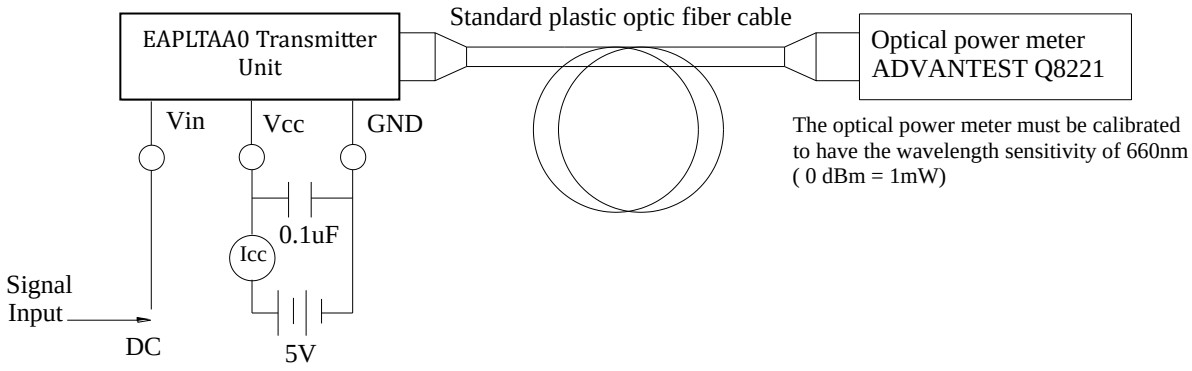


*2 Pulse response measuring method

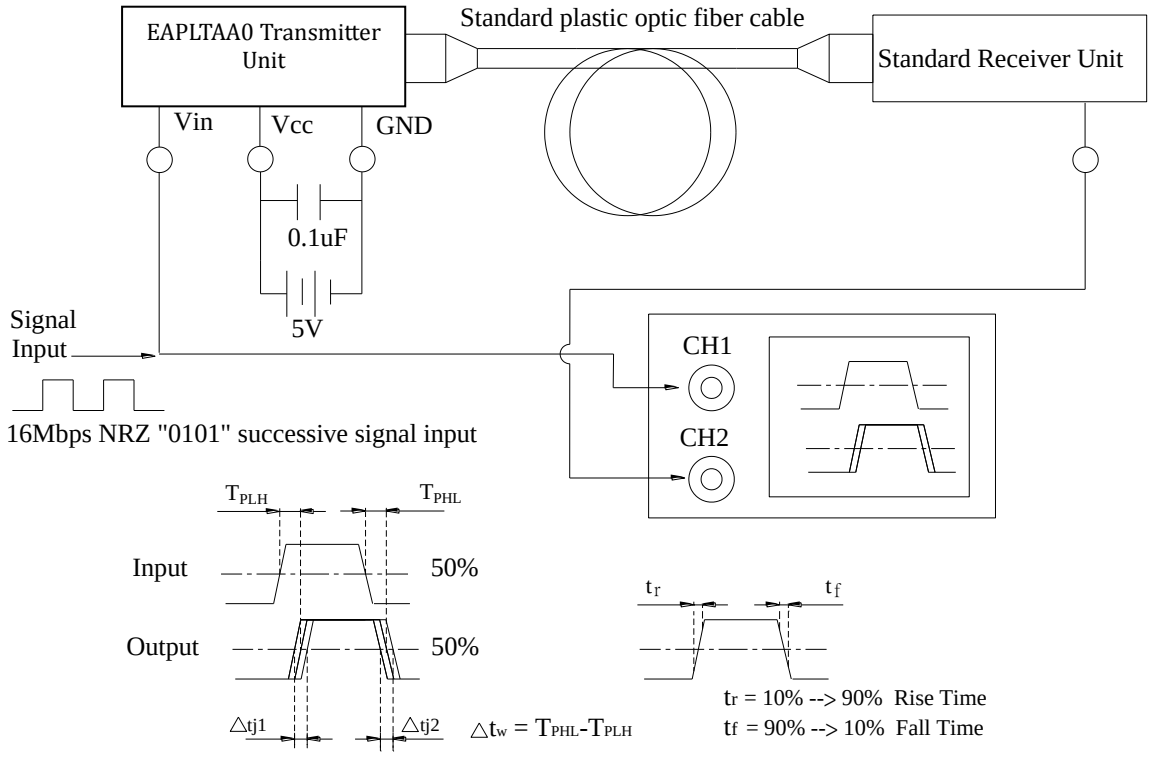

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 05.20.2013.

Package Dimension

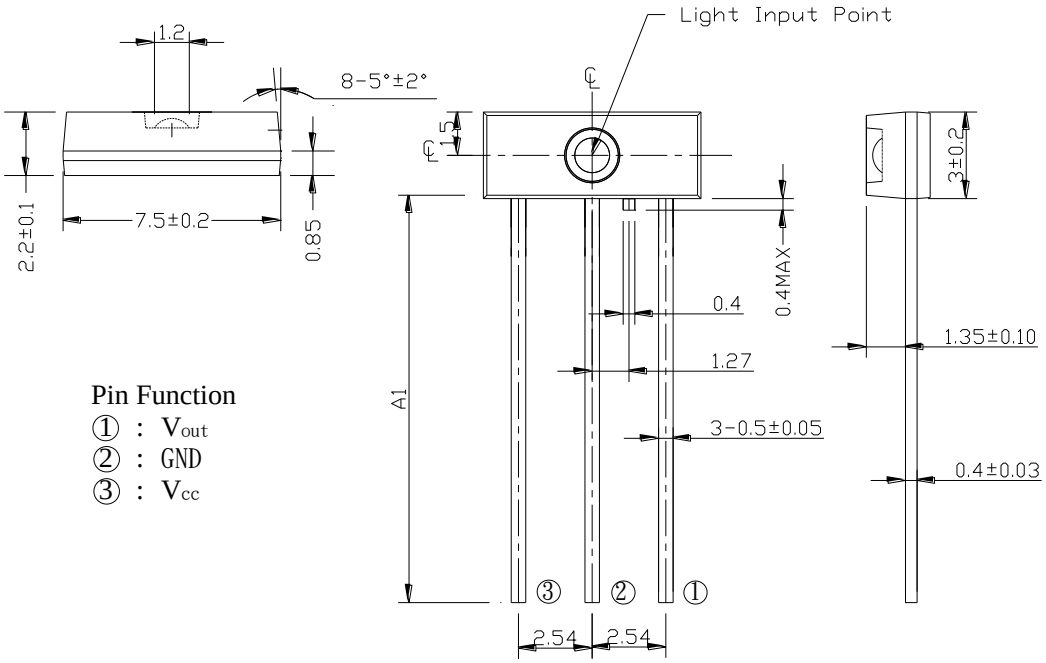

Note: To1.All dimensions are in mm. 2.General Tolerance: ±0.10 mm3.Device Selection Table:

Device Name	Pin Length A1 (mm)	Device Name	Pin Length A1 (mm)
EAPLTAA0	Min 28.00	EAPLTAA0/S9	8.00±0.25
EAPLTAA0/S	8.60±0.25	EAPLTAA0/S10	10.00±0.5
EAPLTAA0/S1	2.80±0.25	EAPLTAA0/S11	7.80±0.25
EAPLTAA0/S2	3.30±0.25	EAPLTAA0/S12	8.30±0.25
EAPLTAA0/S3	3.60±0.25	EAPLTAA0/S13	7.50±0.25
EAPLTAA0/S4	4.10±0.25	EAPLTAA0/S16	15.00±0.5
EAPLTAA0/S5	5.95±0.25	EAPLTAA0/S17	15.00+1/-0
EAPLTAA0/S6	24.15±0.5	EAPLTAA0/S18	6.50±0.25
EAPLTAA0/S7	27.80±0.5	EAPLTAA0/S25	29.0±0.3
EAPLTAA0/S8	6.70±0.25	EAPLTAA0/S32	2.0±0.25

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 05.20.2013.

Moisture Resistant Packing Materials

Label Explanation



- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number
- X: Month
- Reference: Identify Label Number

Packing Quantity Specification

1. 1000 or 500 pcs/bag
2. 8 bag/box

Notes

1. Above specification may be changed without notice. Everlight Americas will reserve authority on material change for above specification.
2. .When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. Everlight Americas assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of Everlight Americas Inc. Please don't reproduce or cause anyone to reproduce them without Everlight Americas's consent.

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 05.20.2013.