


- Louvers permit the passage of air for ventilation but limit liquid infiltration.
- Suitable for ventilation in electronic enclosures, motor housings and metal or plastic panels.
- Quick and easy installation with flexible orientation of louver direction.
- Withstand a push back force of 35 lbs. (47 Nm).
- Lock firmly into panel up to .250˝ (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Heyco Vent Plugs, Heyco Thick Panel Vent Plugs, and Heyco Liquid Tight Threaded Vent Plugs also available.

Heyco® Louvered Plugs

Mounting Hole Diameter Range: .875˝ (22,2 mm) to 3.000˝ (76,2 mm)


MOUNTING HOLE DIAMETER in.	MOUNTING HOLE DIAMETER mm.	PART NO. Black	DESCRIPTION	PART DIMENSIONS A Head Diameter in.	A Head Diameter mm.	B Overall Height in.	B Overall Height mm.
Multiple Locking Steps for Panel Thickness up to .125˝ (3,2 mm)							
.875 1.000	22,2 25,4	**2557** **2559**	LP 875 LP 1000	1.02 1.21	25,8 30,6	.53	13,5
1.093 - 1.125	27,8 - 28,6	**2561**	LP 1093	1.22	30,9		
1.375 1.500 2.000	34,9 38,1 50,8	**2567** **2569** **2594**	LP 1375 LP 1500 LP 2000	1.50 1.68 2.17	38,1 42,6 55,1	.54	13,8
Multiple Locking Steps for Panel Thickness up to .250˝ (6,4 mm)							
2.500 3.000	63,5 76,2	**2596** **2598**	LP 2.5 LP 3.0	2.71 3.17	68,0 80,5	.82	20,9

Standard color black. Consult Heyco for other colors.

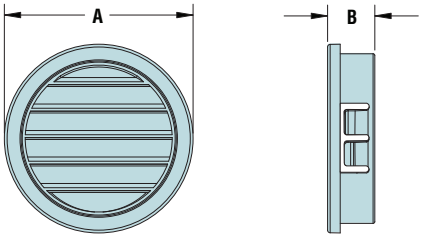



- Located behind the louvers, filter inserts permit the passage of air for ventilation but limit liquid as well as dust and pest infiltration.
- Polyurethane foam filter will filter particle sizes 30 micron and larger.

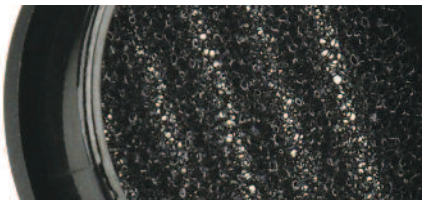

HEYClean™ Filter Insert Louvered Plugs

Mounting Hole Diameter Range: .875˝ (22,2 mm) to 3.000˝ (76,2 mm)

MOUNTING HOLE DIAMETER in.	MOUNTING HOLE DIAMETER mm.	PART NO. Black	DESCRIPTION	PART DIMENSIONS A Head Diameter in.	A Head Diameter mm.	B Overall Height in.	B Overall Height mm.
Multiple Locking Steps for Panel Thickness up to .125˝ (3,2 mm)							
.875 1.000	22,2 25,4	**4947** **4949**	FILP 875 FILP 1000	1.02 1.21	25,8 30,6	.53	13,5
1.093 - 1.125	27,8 - 28,6	**4951**	FILP 1093	1.22	30,9		
1.375 1.500 2.000	34,9 38,1 50,8	**4957** **4959** **4963**	FILP 1375 FILP 1500 FILP 2000	1.50 1.68 2.17	38,1 42,6 55,1	.54	13,8
Multiple Locking Steps for Panel Thickness up to .250˝ (6,4 mm)							
2.500 3.000	63,5 76,2	**4965** **4967**	FILP 2.5 FILP 3.0	2.72 3.17	69,0 80,5	.82	20,9

Standard color black. Consult Heyco for other colors.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com