HEYCO

Heyco® Threaded Smooth Bore Bushings



WILL FIT THESE INTERNALLY THREADED NPT PIPE ENDS OR PORTS	PART NO. Black	PART NO. Gray	DESCRIPTION	PART DIMENSIONS A Inside Diameter in.	A Inside Diameter mm.	B Wrenching Flats in.	B Wrenching Flats mm.	C Overall Height in.	C Overall Height mm.
1/4	**3621B**	**3621**	TSB 1/4	.31	7,9	.63	16,0	.66	16,8
3/8	**3622B**	**3622**	TSB 3/8	.43	10,9	.83	21,0	.69	17,5
1/2	**3623B**	**3623**	TSB 1/2	.58	14,7	.98	24,9	.81	20,6
3/4	**3624B**	**3624**	TSB 3/4	.74	18,8	1.30	33,0	.86	21,8

Standard colors black and gray.

- **Convert raw-edged threaded holes to smooth insulated through holes.**
- Used to protect threaded holes. Eliminate sharp edges so wires are protected.
- Insulate and mechanically protect electrical and communication cables, tubing, rope, and utility lines.
- Molded from electrically non-conductive Nylon 6/6.

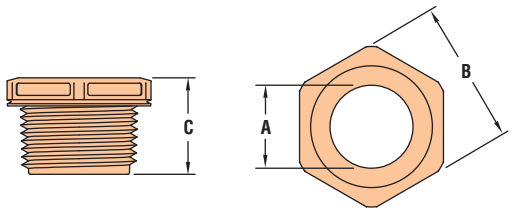

Threaded Smooth Bore Bushing



Snap-In Smooth Bore Bushing

Heyco® Snap-In Smooth Bore Bushings

Mounting Hole Diameter Range: .500″ (12,7 mm) to 1.093″ (27,8 mm)



MOUNTING HOLE DIAMETER in.	MOUNTING HOLE DIAMETER mm.	PART NO. Black	DESCRIPTION	PART DIMENSIONS A Inside Diameter* in.	A Inside Diameter* mm.	B Head Diameter in.	B Head Diameter mm.	C Overall Height in.	C Overall Height mm.
Single Locking Step for Panel Thickness up to .062″ (1,6 mm)									
.500	12,7	**2514**	S 50	.25	6,4	.56	14,2	.27	6,9
.875	22,3	**2540**	S 87	.52	13,2	.98	24,9	.32	8,1
Multiple Locking Steps for Panel Thickness up to .125″ (3,2 mm)									
.625	15,9	**2516**	S 625-4	.25	6,4	.72	18,3	.44	11,2
.750	19,1	**2535**	S 750-5	.36	9,1	.91	23,1		
.875	22,3	**2552**	S 875-9	.56	14,2	.97	24,6	.52	13,1
1.000	25,4	**2554**	S 1000-9	.60	15,2	1.19	30,2		
1.093	27,8	**2555**	S 1093-10	.63	16,0	1.21	30,7		

Standard color black. Consult Heyco for white and other colors.
*Consult Heyco for other Mounting Hole and Inside Diameter configurations. Our Axcell Rapid Response Team is ready to meet your requirements.

- **Extra internal insulating sleeve** creates a smooth bore and prevents locking fingers from protruding into the ID of the Bushing.
- Large radius exit hole.
- Used to protect through-holes. Eliminate sharp edges so wires are protected.
- Absorb vibration, and cushion and insulate wires.
- Can be used as bushing for rotating shafts.
- Bushing inserts into mounting hole with fingertip pressure.

Material	Nylon 6/6
Certifications (Snap-In only)	Recognized under the Component Program of Underwriters' Laboratories File E15331 Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 221°F (105°C)

Quick Specs