STANDARD PACK 1,000/BAG



HEYClip™ Releasable Type T Rivets

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Black	White	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter		STYLE
in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	
KR Series															
.122	3,1	.04	1,0	.08	2,0	**9088**	**9089**	KR 122-039	.14	3,5	.32	8,0	.39	10,0	1
		.08	2,0	.12	3,0	**9090**	**9091**	KR 122-079	.18	4,5					
		.12	3,0	.16	4,0	**9092**	**9093**	KR 122-118	.22	5,5					
		.16	4,0	.20	5,0	**9094**	**9095**	KR 122-157	.26	6,5					
		.20	5,0	.24	6,0	**9194**	**9195**	KR 122-197	.30	7,5					
		.22	5,5	.26	6,5	**9096**	**9097**	KR 122-217	.32	8,0					
.142	3,6	.04	1,0	.08	2,0	**9098**	**9099**	KR 142-039	.14	3,5	.32	8,0	.39	10,0	2
		.08	2,0	.12	3,0	**9100**	**9101**	KR 142-079	.18	4,5					
		.12	3,0	.16	4,0	**9102**	**9103**	KR 142-118	.22	5,5					
		.14	3,5	.18	4,5	**9104**	**9105**	KR 142-137	.24	6,0					
		.18	4,5	.22	5,5	**9106**	**9107**	KR 142-177	.28	7,0					
		.22	5,5	.26	6,5	**9196**	**9197**	KR 142-217	.32	8,0					
.161	4,1	.10	2,5	.14	3,5	**9108**	**9109**	KR 161-098	.20	5,0	.32	8,0	.47	12,0	2
		.14	3,5	.18	4,5	**9110**	**9111**	KR 161-137	.24	6,0					
		.18	4,5	.22	5,5	**9112**	**9113**	KR 161-177	.28	7,0					
		.22	5,5	.26	6,5	**9114**	**9115**	KR 161-217	.32	8,0					
		.26	6,5	.30	7,5	**9198**	**9199**	KR 161-256	.35	9,0					
		.30	7,5	.34	8,5	**9116**	**9117**	KR 161-295	.39	10,0					

Standard colors black and white.

- The "T" style rivet is designed with a **large finger grip**, knob-shaped head for optimal installation and removal by simply pushing or pulling the rivet from the hole.
- Can be used multiple times.
- Part Description Key: KR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

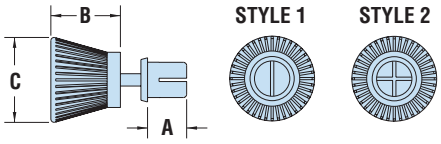

KR Series



HEYClip™ Type P Snap Rivets

Polysulfone High Temperature Snap Rivets

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Black	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter		STYLE
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
PRP Series														
.122	3,1	.078	2.0	.118	3.0	**9349**	PRP 122-079	.18	4,5	.06	1,6	.25	6,4	1
		.118	3.0	.157	4.0	**9350**	PRP 122-118	.22	5,6					
.161	4,1	.157	4.0	.197	5.0	**9351**	PRP 122-157	.26	6,5	.04	1,0	.28	7,0	2

Standard color black.



PRP Series Style 1



PRP Series Style 2

	KR	PRP
Material	Nylon 6	Polysulfone (PSU)
Flammability Rating	94V-2	94-HB
Temperature Range	-40°F (-40°C) to 239°F (115°C)	32°F (0°C) to 302°F (150°C)