

STANDARD PACK 1,000/BAG

HEYClip™ Countersunk Type H Rivets

- Flat, **chamfered rivet head** for **easier disassembly** when required.
- Accommodate countersunk hole specification DIN ISO 7721.
- The "H" type rivet is designed with a flat head for fast and easy installation, without any tools.
- Simply place rivet into the hole and press down on the head to fasten.
- Part Description Key: PRH X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS: MOUNTING HOLE DIA. in.	mm.	ASSEMBLED PANEL THICKNESS Min. in.	mm.	Max. in.	mm.	PART NO. Black	White	V-0 Black *	DESCRIPTION	PART DIMENSIONS: A Length in.	mm.	B Head Height in.	mm.	C Head Diameter in.	mm.	EXTRACTION FORCE N	Style
PRH Series																	
.102	2,6	.22	5,5	.26	6,5	**9118**	**9119**	**9118F**	PRH 102-217	.33	8,5	.03	0,7	.18	4,6	49	1
.122	3,1	.04	1,0	.08	2,0	**9156**	**9157**	**9156F**	PRH 122-039	.14	3,5	.04	1,0	.25	6,4	78	1
		.08	2,0	.12	3,0	**9158**	**9159**	**9158F**	PRH 122-079	.18	4,5						
		.12	3,0	.16	4,0	**9160**	**9161**	**9160F**	PRH 122-118	.22	5,5						
		.16	4,0	.19	5,0	**9162**	**9163**	**9162F**	PRH 122-157	.26	6,5						
		.20	5,0	.24	6,0	**9164**	**9165**	**9164F**	PRH 122-197	.31	7,5						
		.22	5,5	.26	6,5	**9166**	**9167**	**9166F**	PRH 122-217	.32	8,0						
		.26	6,5	.30	7,5	**9168**	**9169**	**9168F**	PRH 122-256	.35	9,0						
		.30	7,5	.34	8,5	**9170**	**9171**	**9170F**	PRH 122-295	.39	10,0						
.142	3,6	.04	1,0	.08	2,0	**9172**	**9173**	**9172F**	PRH 142-039	.14	3,5	.04	1,0	.25	6,4	118	2
		.08	2,0	.12	3,0	**9174**	**9175**	**9174F**	PRH 142-079	.19	4,5						
		.12	3,0	.16	4,0	**9176**	**9177**	**9176F**	PRH 142-118	.22	5,5						
		.14	3,5	.18	4,5	**9178**	**9179**	**9178F**	PRH 142-138	.24	6,0						
		.18	4,5	.22	5,5	**9180**	**9181**	**9180F**	PRH 142-177	.28	7,0						
		.22	5,5	.26	6,5	**9182**	**9183**	–	PRH 142-217	.32	8,0						

Standard colors black and white.
*Black nylon 6/6 UL 94V-0.

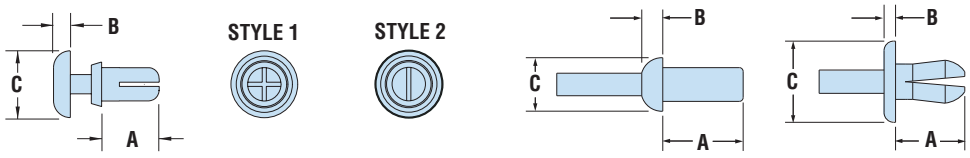

PRH Series DR Series



HEYClip™ Drive Rivets

- Install by placing rivet into hole and pushing the drive pin into the rivet to expand legs and lock in place.
- No tools required.
- Part Description Key: DR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS: MOUNTING HOLE DIA. in.	mm.	ASSEMBLED PANEL THICKNESS Min. in.	mm.	Max. in.	mm.	PART NO. Black	Natural	DESCRIPTION	PART DIMENSIONS: A Length in.	mm.	B Head Height in.	mm.	C Head Diameter in.	mm.	
.161	4,1	.16	4,0	.26	6,5	**9331**	**9332**	DR 161-157	.32	8,1	.06	1,5	.30	7,5	NEW!
.187	4,8	.04	1,0	.38	9,5	**9184**	**9185**	DR 189-039	.42	10,7	.06	1,5	.28	7,1	
		.16	4,0	.28	7,1	**9186**	**9187**	DR 189-158	.38	9,7	.06	1,5	.43	10,9	
.201	5,1	.06	1,5	.28	7,0	**9336**	-	DR 201-059	.36	9,1	.07	1,8	.33	8,5	NEW!
.218	5,5	.09	2,4	.16	4,0	**9188**	**9189**	DR 217-094	.45	11,4	.08	2,0	.37	9,4	
.236	6,0	.12	3,0	.28	7,0	**9337**	-	DR 236-118	.39	10,0	.08	2,0	.43	10,9	NEW!
.250	6,4	.06	1,5	.25	6,4	**9190**	**9191**	DR 252-059	.37	9,3	.10	2,5	.44	11,1	
		.12	3,0	.28	7,0	**9341**	-	DR 252-118	.49	12,5	.08	2,0	.47	11,9	NEW!
		.28	7,1	.50	12,7	**9192**	**9193**	DR 252-280	.62	15,8					

Standard colors black and natural.
*Standard color white.

Quick Specs

Material	**PRH** - Nylon 6 **DR** - Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com