

STANDARD PACK 1,000/BAG

HEYClip™ Countersunk Type H Rivets

- Flat, **chamfered rivet head** for **easier disassembly** when required.
- Accommodate countersunk hole specification DIN ISO 7721.
- The "H" type rivet is designed with a flat head for fast and easy installation, without any tools.
- Simply place rivet into the hole and press down on the head to fasten.
- Part Description Key: PRH X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS						PART NO.			DESCRIPTION	PART DIMENSIONS						EXTRACTION FORCE	
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS								A Length		B Head Height		C Head Diameter			
		Min.		Max.				V-0									
in.	mm.	in.	mm.	in.	mm.	Black	White	Black *		in.	mm.	in.	mm.	in.	mm.	N	Style
PRH Series																	
.102	2,6	.22	5,5	.26	6,5	**9118**	**9119**	**9118F**	PRH 102-217	.33	8,5	.03	0,7	.18	4,6	49	1
.122	3,1	.04	1,0	.08	2,0	**9156**	**9157**	**9156F**	PRH 122-039	.14	3,5	.04	1,0	.25	6,4	78	1
		.08	2,0	.12	3,0	**9158**	**9159**	**9158F**	PRH 122-079	.18	4,5						
		.12	3,0	.16	4,0	**9160**	**9161**	**9160F**	PRH 122-118	.22	5,5						
		.16	4,0	.19	5,0	**9162**	**9163**	**9162F**	PRH 122-157	.26	6,5	.04	1,0	.24	6,0		
		.20	5,0	.24	6,0	**9164**	**9165**	**9164F**	PRH 122-197	.31	7,5						
		.22	5,5	.26	6,5	**9166**	**9167**	**9166F**	PRH 122-217	.32	8,0						
		.26	6,5	.30	7,5	**9168**	**9169**	**9168F**	PRH 122-256	.35	9,0	.04	1,0	.25	6,4		
		.30	7,5	.34	8,5	**9170**	**9171**	**9170F**	PRH 122-295	.39	10,0						
.142	3,6	.04	1,0	.08	2,0	**9172**	**9173**	**9172F**	PRH 142-039	.14	3,5	.04	1,0	.25	6,4	118	2
		.08	2,0	.12	3,0	**9174**	**9175**	**9174F**	PRH 142-079	.19	4,5						
		.12	3,0	.16	4,0	**9176**	**9177**	**9176F**	PRH 142-118	.22	5,5	.04	1,0	.24	6,0		
		.14	3,5	.18	4,5	**9178**	**9179**	**9178F**	PRH 142-138	.24	6,0						
		.18	4,5	.22	5,5	**9180**	**9181**	**9180F**	PRH 142-177	.28	7,0						
		.22	5,5	.26	6,5	**9182**	**9183**	–	PRH 142-217	.32	8,0						

Standard colors black and white.
*Black nylon 6/6 UL 94V-0.

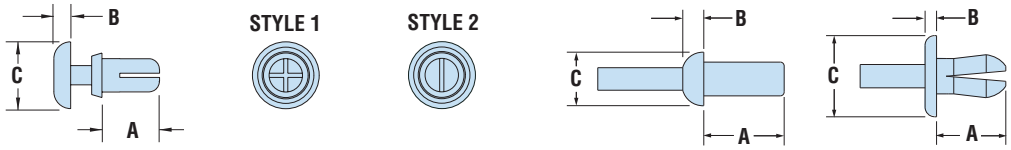

PRH Series DR Series



- Install by placing rivet into hole and pushing the drive pin into the rivet to expand legs and lock in place.
- No tools required.
- Part Description Key: DR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Pack - 1,000/bag.

HEYClip™ Push (aka Drive) Rivets

WILL FIT THESE PANELS						PART NO.		DESCRIPTION	PART DIMENSIONS					
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS							A Length		B Head Height		C Head Diameter	
		Min.		Max.										
in.	mm.	in.	mm.	in.	mm.	Black	Natural		in.	mm.	in.	mm.	in.	mm.
DR Series														
.161	4,1	.10	2,5	.14	3,5	**9141**	**9142***	DR 161-098	.20	5,0	.09	2,2	.31	8,0
.187	4,8	.04	1,0	.38	9,5	**9184**	**9185**	DR 189-039	.42	10,7	.06	1,5	.28	7,1
		.16	4,0	.28	7,1	**9186**	**9187**	DR 189-158	.38	9,7	.06	1,5	.43	10,9
.218	5,5	.09	2,4	.16	4,0	**9188**	**9189**	DR 217-094	.45	11,4	.08	2,0	.37	9,4
.250	6,4	.06	1,5	.25	6,4	**9190**	**9191**	DR 252-059	.36	9,2	.19	4,7	.44	11,1
		.28	7,1	.50	12,7	**9192**	**9193**	DR 252-280	.62	15,8	.08	2,0	.47	11,9

Standard colors black and natural.
*Standard color white.

Quick Specs

Material	**PRH** - Nylon 6 **DR** - Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 185°F (85°C)