

Heyco® Screw-In Rubber Pocket Bumpers

- **Bumpers can be used as mounting feet** to prevent equipment from sliding or moving.
- Designed for through hole installation.
- 60-70 Durometer Range.
- 29 sizes available that will accommodate various mounting holes and panel thicknesses.
- Provide vibration dampening.

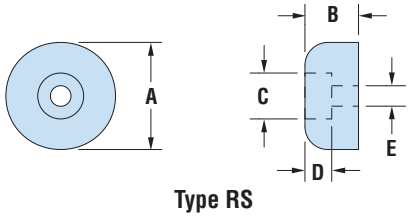

Type RS

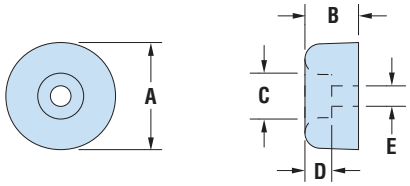

Type RR

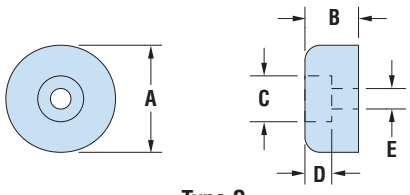

Type S

PART DIMENSIONS								BLACK PART NO.			
A Outside Diameter		B Overall Height		C Recess Diameter		D Recess Depth		No Washer	With Steel Washer	E Fastner Hole Dia.*	
in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.
Type RS											
.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	**G2201**	.13	3,2
.63	15,9	.38	9,5	.25	6,4	.19	4,7	-	**G2205**		
.75	19,1	.38	9,5	.32	7,9	.19	4,7	-	**G2209**	.16	4,0
.81	20,6	.72	18,3	.38	9,5	.28	7,1	-	**G2213**	.22	5,5
1.00	25,4	.81 1.00	20,6 25,4	.25 .31	6,4 7,9	.44 .63	11,1 15,9	- **G2220**	**G2217** **G2221**	.13 .16	3,2 4,0
1.09	27,7	.63	15,9	.44	11,1	.41	10,3	-	**G2225**	.19	4,7
Type RR											
.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	**G2229**	.09	2,4
.75	19,1	.56 .75	14,3 19,1	.38 .31	9,5 7,9	.25 .25	6,4 6,4	- -	**G2233** **G2237**	.19 .13	4,7 3,2
.81	20,6	.81	20,6	.47	11,9	.44	11,1	-	**G2241**	.25	6,4
.94	23,8	.35	8,9	.38	9,5	.18	4,6	-	**G2245**	.19	4,7
		.38	9,5	.38	9,5	.22	5,5	**G2244**	-		
.97	24,6	.34	8,7	.38	9,5	.19	4,7	-	**G2249**		
1.00	25,4	.44	11,1	.38	9,5	.19	4,7	-	**G2253**		
		.50 .56	12,7 14,3	.50 .53	12,7 13,5	.25 .31	6,4 7,9	- -	**G2257** **G2261**	.22 .28	5,5 7,1
1.25	31,8	1.25 1.88	31,8 47,6	.38 .38	9,5 9,5	.75 .75	19,1 19,1	- -	**G2267** **G2271**	.25	6,4
1.50	38,1	.63	15,9	.50 .75	12,7 19,1	.34 .34	8,7 8,7	- **G2278**	**G2275** **G2279**	.19 .31	4,7 7,9
		.75	19,1	.47	11,9	.50	12,7	-	**G2283**	.25	6,4
1.70	43,2	1.12	28,4	.60	15,2	.72	18,3	**G2286**	-	.38	9,6
1.71	44,5	1.66	44,5	.62	15,9	.50	12,7	**G2290**			
2.50	63,5	1.00	25,4	1.13	28,6	.50	12,7	**G2294** **G2296**† **G2298**†			
		2.00	50,8	1.13	28,6	1.25	28,6	**G2302**			
Type S											
1.00	25,4	.50	12,7	.36 / .43	9,0 / 10,9	.20 / .16	5,0 / 4,1	-	**G2307**	.19	4,7
1.50	38,1	.75	19,1	.75	19,1	.38	9,5	-	**G2311**	.25	6,4

Standard color black. Standard material SBR (Styrene Butadiene Rubber), 60-70 durometer.
***Fastener not included.**
†**Part Nos. G2296** and **G2298** are made from **White** SBR, 60-70 durometer.

Quick Specs

Material	SBR
Temperature Range	-40°F (-40°C) to 221°F (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com