

図面番号(DRAWING NO.)
SJ104341

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.

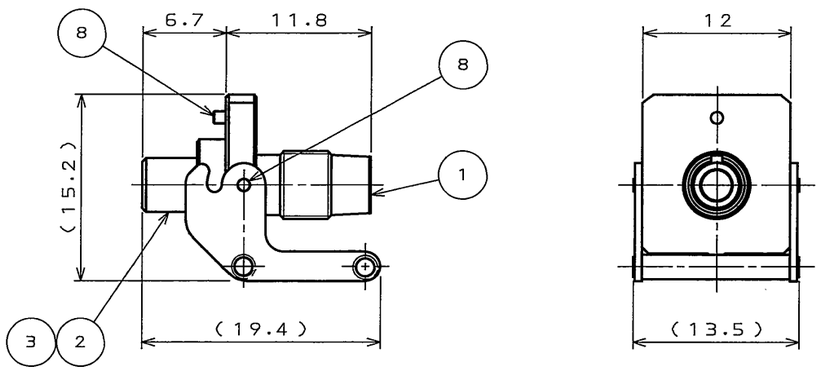

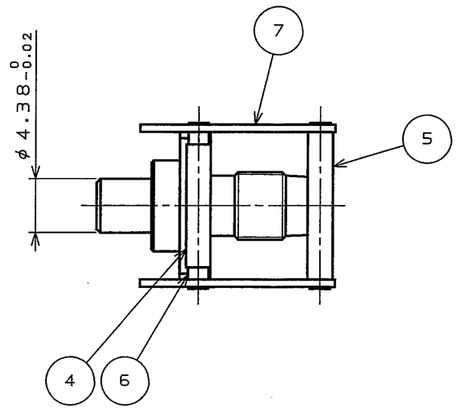

1.Optical Parformance
(The performance when the item is mate with FO-FC-RS-A-R(SJ104350))

Insertion Loss 0.4dB Max(note1)

note1.The value shows insertion loss in case that a master optical connector,to which PC connection is available,and a master optical connector,to which PC connection is available,are connected.

2.Mechanical Performace
Unlock force of lever : 2.9N MIN

1.光学性能(FO-FC-RS-A-R(SJ104350)と嵌合した時の性能である)

挿入損失 0.4dB以下(注1)

注1.PC接続が可能なマスター光コネクタとPC接続が可能なマスター光コネクタを接続した場合の値である。

2.機械性能
レバー離脱力 : 2.9N以上

符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
8	PARALLEL PIN	3	STAINLESS STEEL	———	———
7	LEVER	2	STAINLESS STEEL	———	———
6	LEVER PIN2	1	STAINLESS STEEL	———	———
5	LEVER PIN1	1	STAINLESS STEEL	———	———
4	STAINLESS PIPE	1	STAINLESS STEEL	———	———
3	SLIT SLEEVE	1	CERAMIC	———	———
2	SLEEVE HOLDER	1	COPPER ALLOY	NICKEL PLATING	———
1	FRONT SHELL	1	COPPER ALLOY	NICKEL PLATING	———

仕様書(SPECIFICATION) ———

第1版(ORIGINAL DATE) 30.Jun.2005

製図 DR. Y.HIROKI

担当 CHK. Y.HIROKI

査閲 APPD. H.Shimoya

承認 APPD. A.Onogawa

一般公差(GENERAL TOLERANCE)

寸法(DIMENSION)	角度(ANGLES)
. ±0.8	X° ±
.X ±0.4	X°X'±
.XX ±0.1	
.XXX±	

尺度(SCALE) 2:1

シリーズ(SERIES) OPT

名称(TITLE) FO-FC-FS(DIN)-STD-R

質量(MASS) ———

日本航空電子工業株式会社
JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

図面番号(DRAWING NO.) SJ104341

版数(REV.) 1

SIZE A3

JAE-CONNECTOR.COM
Reference Only

DOF-0-212E(03.08)

0 10 20 30 40 50 60 70 80 90 100

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT (C) 2005, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.