Standard Rectifier Module

3~ Rectifier		
V_{RRM}	=	1600 V
I_{DAV}	=	360 A
I_{FSM}	=	1900 A

3~ Rectifier Bridge + Softstart-Thyristor

Part number

MDMA360UC1600TED

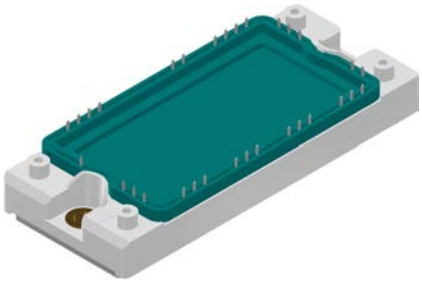

Backside: isolated

E72873

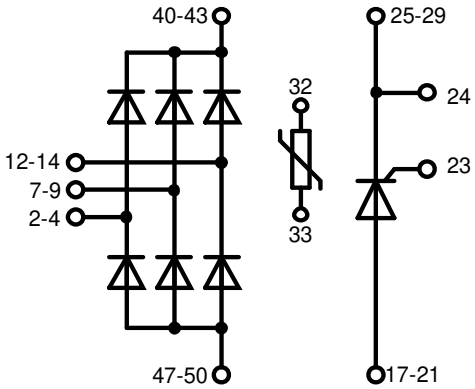

Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

Applications:

- Diode for main rectification plus Softstart-Thyristor
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Package: E2-Pack

- Isolation Voltage: 4300 V~
- Industry standard outline
- RoHS compliant
- PressFit-Pins for PCB mounting
- Height: 17 mm
- Base plate: Copper internally DCB isolated
- Advanced power cycling
- Phase Change Material available

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

© 2020 IXYS all rights reserved

Rectifier

Symbol	Definition	Conditions		Ratings min.	typ.	max.	Unit
V_{RSM}	*max. non-repetitive reverse blocking voltage*		T_{VJ} = 25°C			1700	V
V_{RRM}	*max. repetitive reverse blocking voltage*		T_{VJ} = 25°C			1600	V
I_R	*reverse current*	V_R = 1600 V	T_{VJ} = 25°C			100	µA
		V_R = 1600 V	T_{VJ} = 150°C			3	mA
V_F	*forward voltage drop*	I_F = 120 A	T_{VJ} = 25°C			1,25	V
		I_F = 360 A				1,80	V
		I_F = 120 A	T_{VJ} = 125°C			1,23	V
		I_F = 360 A				1,98	V
I_{DAV}	*bridge output current*	T_C = 85°C	T_{VJ} = 150°C			360	A
		rectangular d = ⅓					
V_{F0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 150°C			0,82	V
r_F	*slope resistance* }					3,4	mΩ
R_{thJC}	*thermal resistance junction to case*					0,25	K/W
R_{thCH}	*thermal resistance case to heatsink*				0,1		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			500	W
I_{FSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			1,90	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			2,05	kA
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			1,62	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			1,75	kA
I^2t	*value for fusing*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			18,1	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			17,5	kA²s
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			13,0	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			12,7	kA²s
C_J	*junction capacitance*	V_R = 400 V; f = 1 MHz	T_{VJ} = 25°C		10		pF

© 2020 IXYS all rights reserved

Softstart-Thyristor				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	*max. non-repetitive reverse/forward blocking voltage*		T_{VJ} = 25°C			1700	V
$V_{RRM/DRM}$	*max. repetitive reverse/forward blocking voltage*		T_{VJ} = 25°C			1600	V
$I_{R/D}$	*reverse current, drain current*	$V_{R/D}$ = 1600 V	T_{VJ} = 25°C			100	µA
		$V_{R/D}$ = 1600 V	T_{VJ} = 150°C			15	mA
V_T	*forward voltage drop*	I_T = 150 A	T_{VJ} = 25°C			1.34	V
		I_T = 300 A				1.73	V
		I_T = 150 A	T_{VJ} = 125°C			1.31	V
		I_T = 300 A				1.77	V
I_{TAV}	*average forward current*	T_C = 90°C	T_{VJ} = 150°C			150	A
		180° sine					
V_{T0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 150°C			0.84	V
r_T	*slope resistance* }					3.1	mΩ
R_{thJC}	*thermal resistance junction to case*					0.17	K/W
R_{thCH}	*thermal resistance case to heatsink*				0.080		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			735	W
I_{TSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			2.40	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			2.59	kA
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			2.04	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			2.21	kA
I^2t	*value for fusing*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			28.8	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			27.9	kA²s
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			20.8	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			20.2	kA²s
C_J	*junction capacitance*	V_R = 400 V f = 1 MHz	T_{VJ} = 25°C		119		pF
P_{GM}	*max. gate power dissipation*	t_P = 30 µs	T_C = 150°C			10	W
		t_P = 300 µs				5	W
P_{GAV}	*average gate power dissipation*					0.5	W
$(di/dt)_{cr}$	*critical rate of rise of current*	T_{VJ} = 150°C; f = 50 Hz repetitive,	I_T = 450 A			150	A/µs
		t_P = 200 µs; di_G/dt = 0.45 A/µs;					
		I_G = 0.45 A; V_D = ⅔ V_{DRM} non-repet.,	I_T = 150 A			500	A/µs
$(dv/dt)_{cr}$	*critical rate of rise of voltage*	V_D = ⅔ V_{DRM}	T_{VJ} = 150°C			1000	V/µs
		R_{GK} = ∞; method 1 (linear voltage rise)					
V_{GT}	*gate trigger voltage*	V_D = 6 V	T_{VJ} = 25°C			1.5	V
			T_{VJ} = -40°C			1.6	V
I_{GT}	*gate trigger current*	V_D = 6 V	T_{VJ} = 25°C			150	mA
			T_{VJ} = -40°C			200	mA
V_{GD}	*gate non-trigger voltage*	V_D = ⅔ V_{DRM}	T_{VJ} = 150°C			0.2	V
I_{GD}	*gate non-trigger current*					10	mA
I_L	*latching current*	t_p = 10 µs	T_{VJ} = 25°C			200	mA
		I_G = 0.45 A; di_G/dt = 0.45 A/µs					
I_H	*holding current*	V_D = 6 V R_{GK} = ∞	T_{VJ} = 25°C			200	mA
t_{gd}	*gate controlled delay time*	V_D = ½ V_{DRM}	T_{VJ} = 25°C			2	µs
		I_G = 0.45 A; di_G/dt = 0.45 A/µs					
t_q	*turn-off time*	V_R = 100 V; I_T = 150 A; V_D = ⅔ V_{DRM}	T_{VJ} = 125 °C		185		µs
		di/dt = 10 A/µs dv/dt = 20 V/µs t_p = 200 µs					

© 2020 IXYS all rights reserved

Package E2-Pack				Ratings			
Symbol	**Definition**	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
I_{RMS}	*RMS current*	per terminal				50	A
T_{VJ}	*virtual junction temperature*			-40		150	°C
T_{op}	*operation temperature*			-40		125	°C
T_{stg}	*storage temperature*			-40		125	°C
Weight					176		g
M_D	*mounting torque*			3		6	Nm
$d_{Spp/App}$	*creepage distance on surface | striking distance through air*		*terminal to terminal*	6,0			mm
$d_{Spb/Apb}$			*terminal to backside*	12,0			mm
V_{ISOL}	*isolation voltage*	t = 1 second	50/60 Hz, RMS; I_{ISOL} ≤ 1 mA	4300			V
		t = 1 minute		3600			V

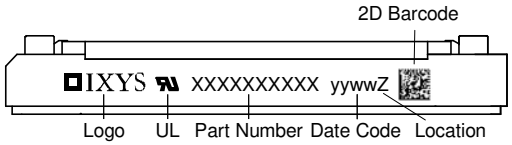

Part description

M = Module
D = Diode
M = Standard Rectifier
A = (up to 1800V)
360 = Current Rating [A]
UC = 3~ Rectifier Bridge + Softstart-Thyristor
1600 = Reverse Voltage [V]
T = Thermistor \ Temperature sensor
ED = E2-Pack

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MDMA360UC1600TED	MDMA360UC1600TED	Box	6	524541

Temperature Sensor NTC

Symbol	Definition	Conditions	min.	typ.	max.	Unit
R_{25}	*resistance*	T_{VJ} = 25°	4,85	5	5,15	kΩ
$B_{25/50}$	*temperature coefficient*			3375		K

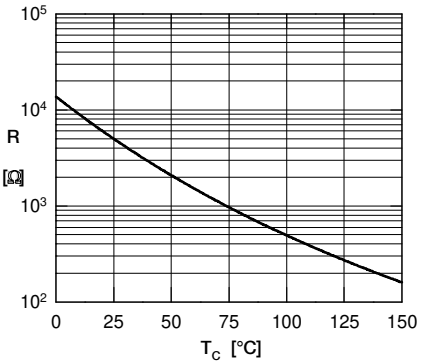

Typ. NTC resistance vs. temperature

Equivalent Circuits for Simulation

** on die level* T_{VJ} = 150°C



Rectifier

$V_{0\ max}$	*threshold voltage*	0,82	V
$R_{0\ max}$	*slope resistance **	10,2	mΩ

© 2020 IXYS all rights reserved

Outlines E2-Pack

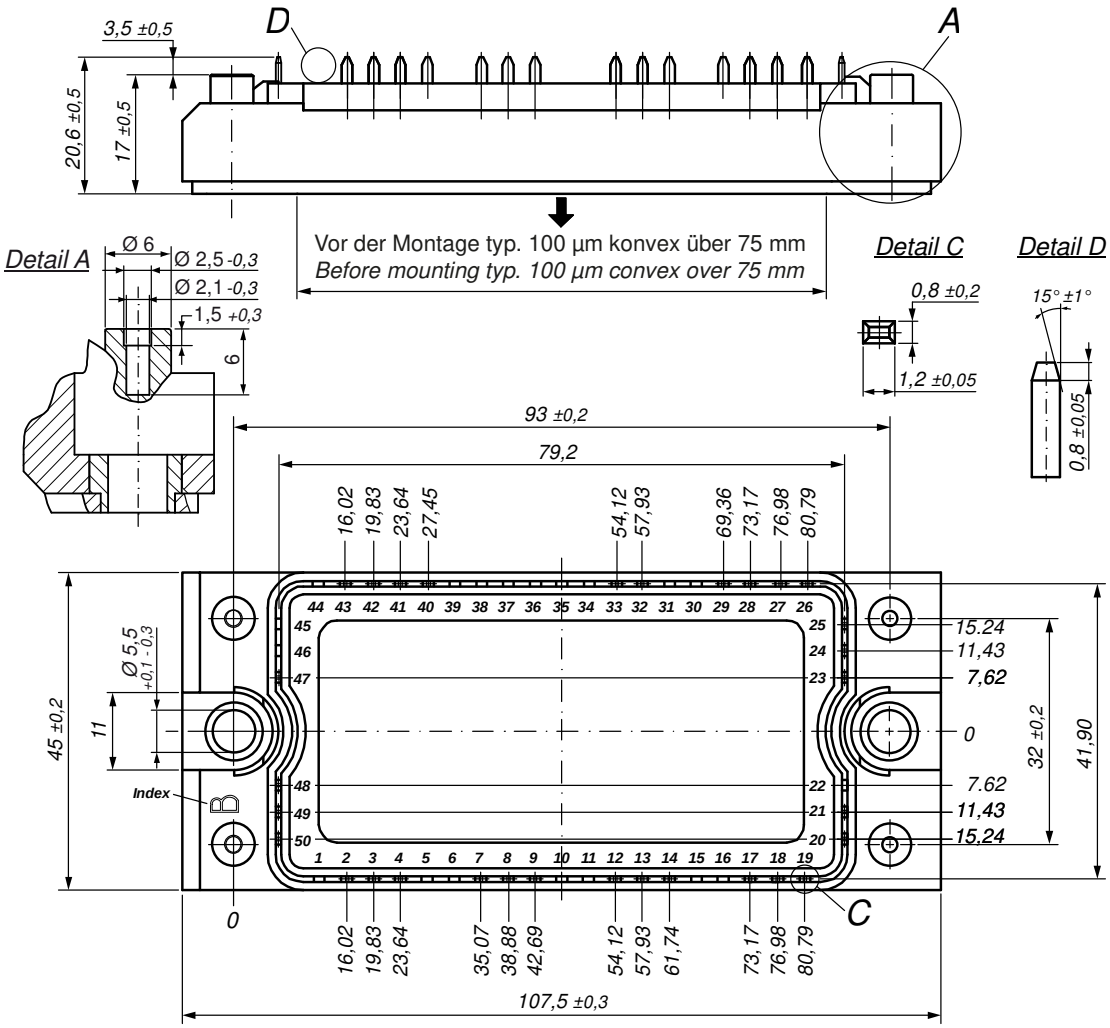

Bemerkung / ***Note:***

- Nichttolerierte Maße nach / *Measure without tolerances according DIN ISO 2768-T1-m*
- PCB-Lochmuster / *PCB hole pattern:* **see pin position**
- Toleranz Pin-Position und PCB-Lochmuster / *Tolerance of pin position and PCB hole pattern:* ⌖ **0.1**
- Montageanleitung / *Mounting instruction:* www.ixys.com **Application note IXAN0024**

***Detail A*:** PCB-Montage / *Mounting on PCB*

- Empfohlene, selbstschneidende Schraube / *Recommended, self-tapping screw:* **EJOT PT®** (Größe / *size:* **K25**)
- Max. Schraubenlänge / *Max. screw length:* **PCB-Dicke** / **thickness + 6 mm** *(*max. Lochtiefe / *hole depth)*
- Empfohlenes Drehmoment / *Recommended mounting torque:* **1.5 Nm**

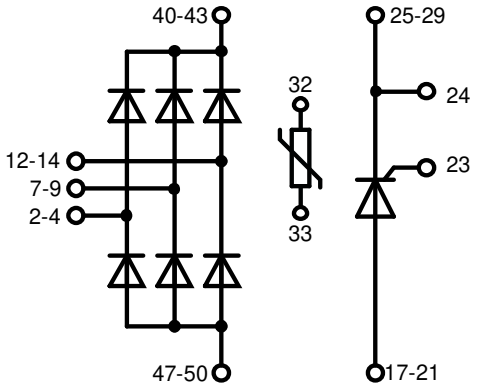

© 2020 IXYS all rights reserved

Rectifier

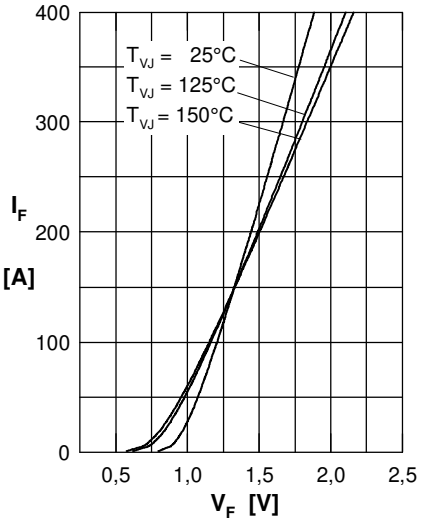

Fig. 1 Forward current versus voltage drop per diode

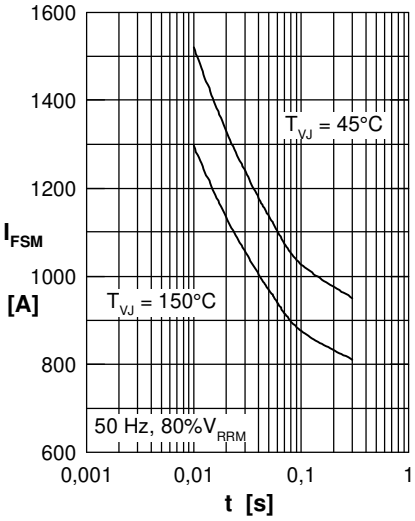

Fig. 2 Surge overload current vs. time per diode

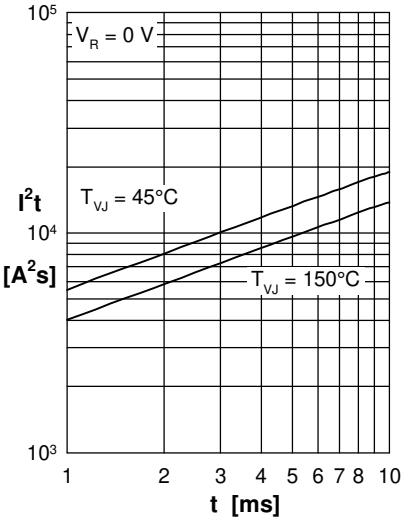

Fig. 3 I^2t versus time per diode

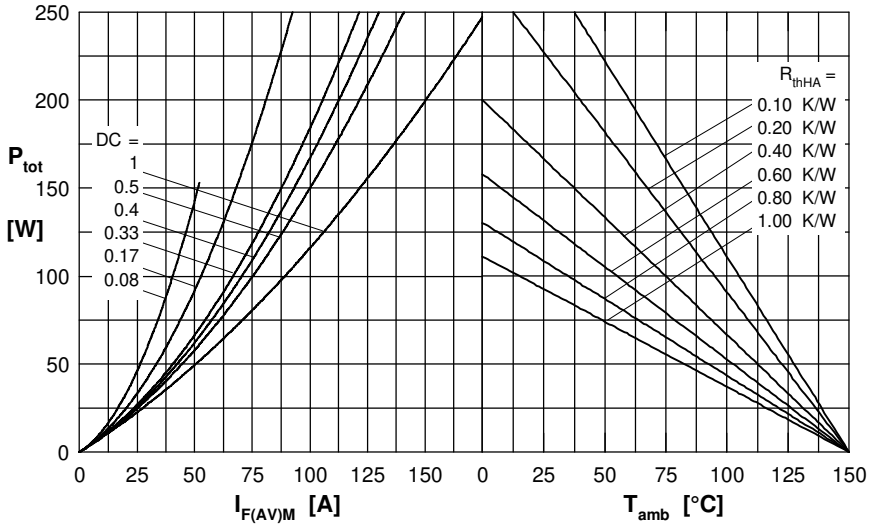

Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

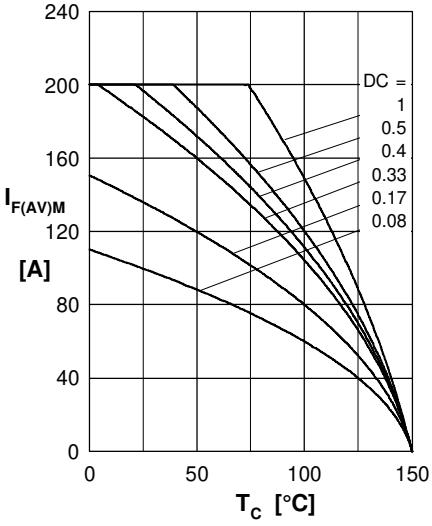

Fig. 5 Max. forward current vs. case temperature per diode

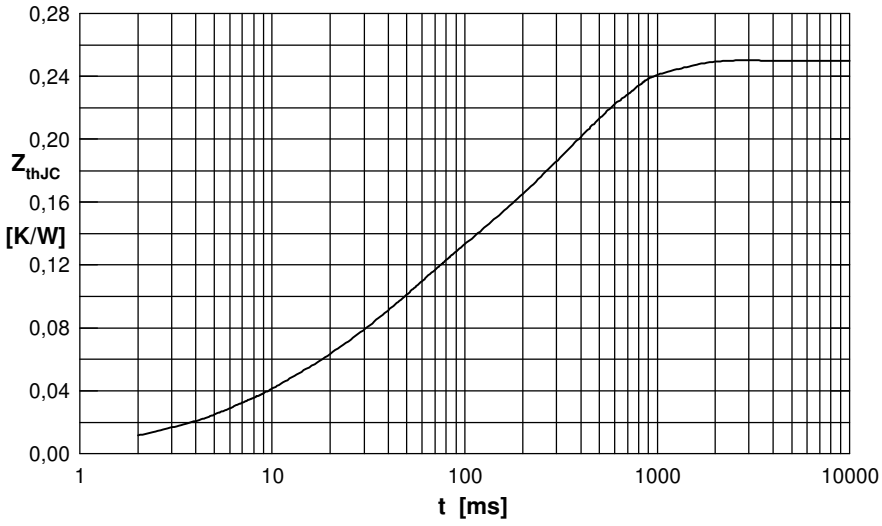

Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.020	0.006
2	0.003	0.007
3	0.080	0.037
4	0.147	0.360

© 2020 IXYS all rights reserved

Softstart Thyristor

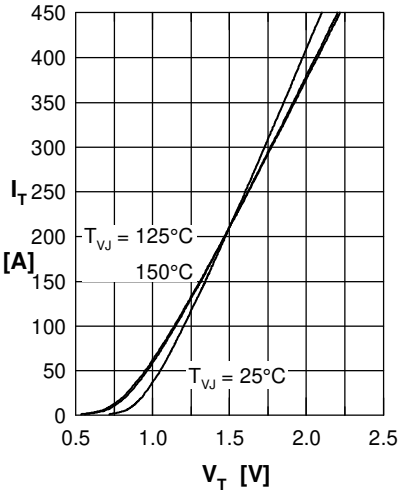

Fig. 1 Forward characteristics

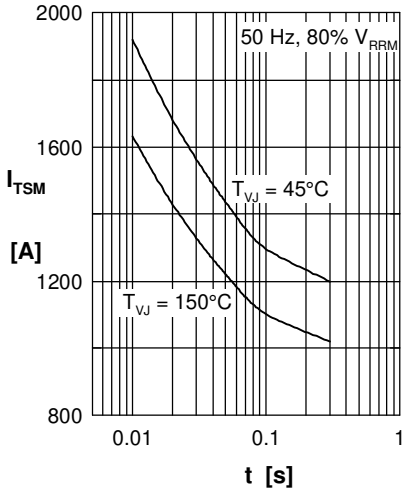

Fig. 2 Surge overload current
I_{TSM}: crest value, t: duration

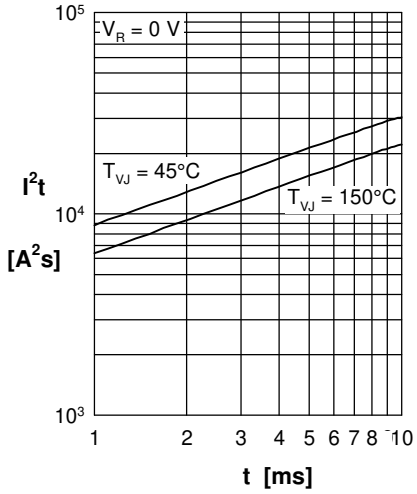

Fig. 3 I^2t versus time (1-10 s)

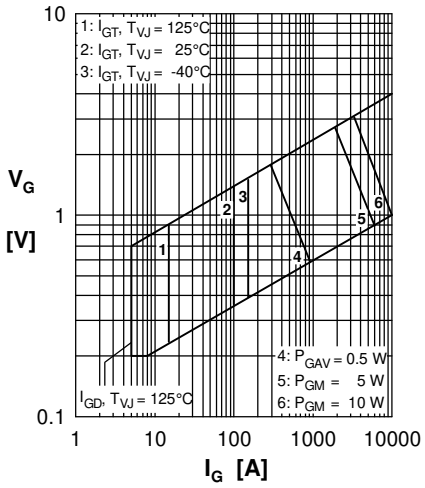

Fig. 4 Gate voltage & gate current

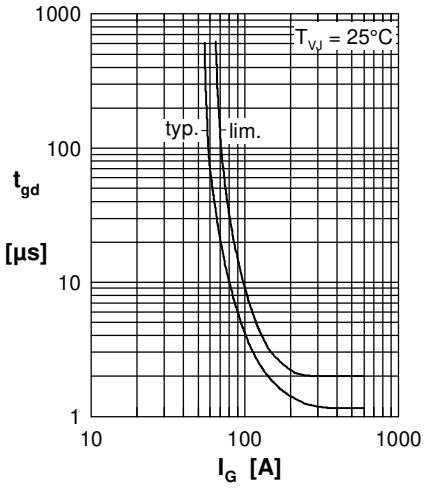

Fig. 5 Gate controlled delay time t_{gd}

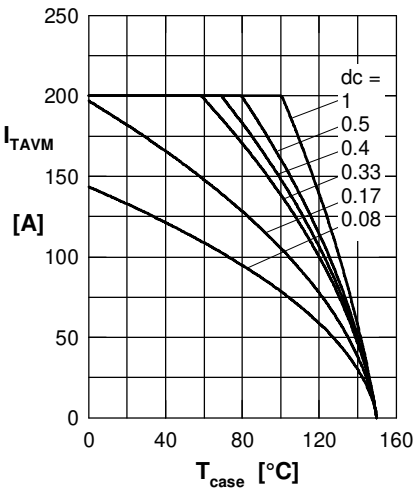

Fig. 6 Max. forward current at case temperature

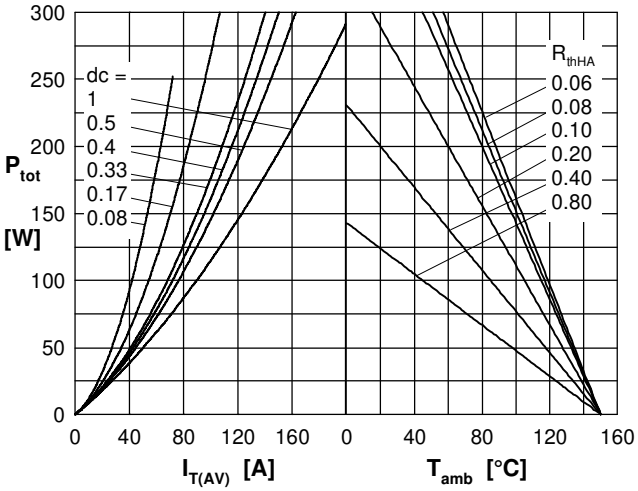

Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

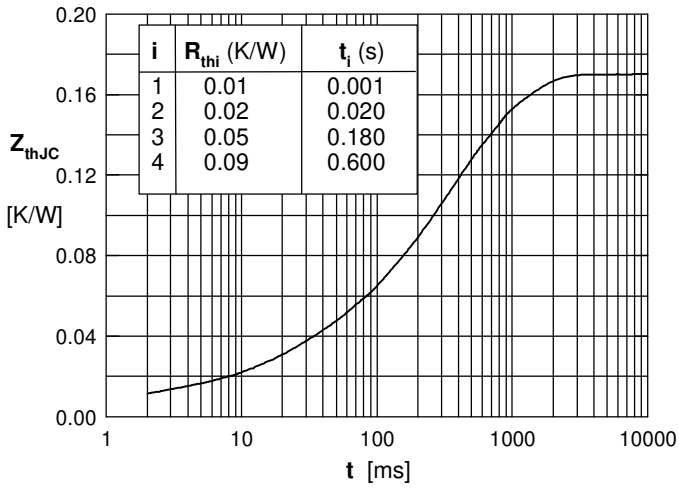

Fig. 8 Transient thermal impedance junction to case

© 2020 IXYS all rights reserved