Mallory Sonalert Products Inc.	Part # PB-1226PEBMQ
Sales Outline Drawing	Revision **D**

May not be suitable for all medical and aerospace applications.

Specifications: Contact Mallory Sonalert to discuss your application.

NO CIRCUITRY

Oscillation Frequency (Hz)	2600 ± 200
Operating Voltage (Vp-p)	1.1 ~ 3.0
Rated Voltage (Vp-p)	1.5
Current Consumption Max. (mA)	40 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	16 ± 3
Inductance (mH/max)	2.0
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Lead Pin	Tin Plated Brass
Housing	PBT plastic resin (Color : Black)
Weight (Grams)	2.0
Options	For other options contact factory

Dimensions: (units: mm) PS: Vp-p = 1/2duty, square wave **ROHS Compliant**

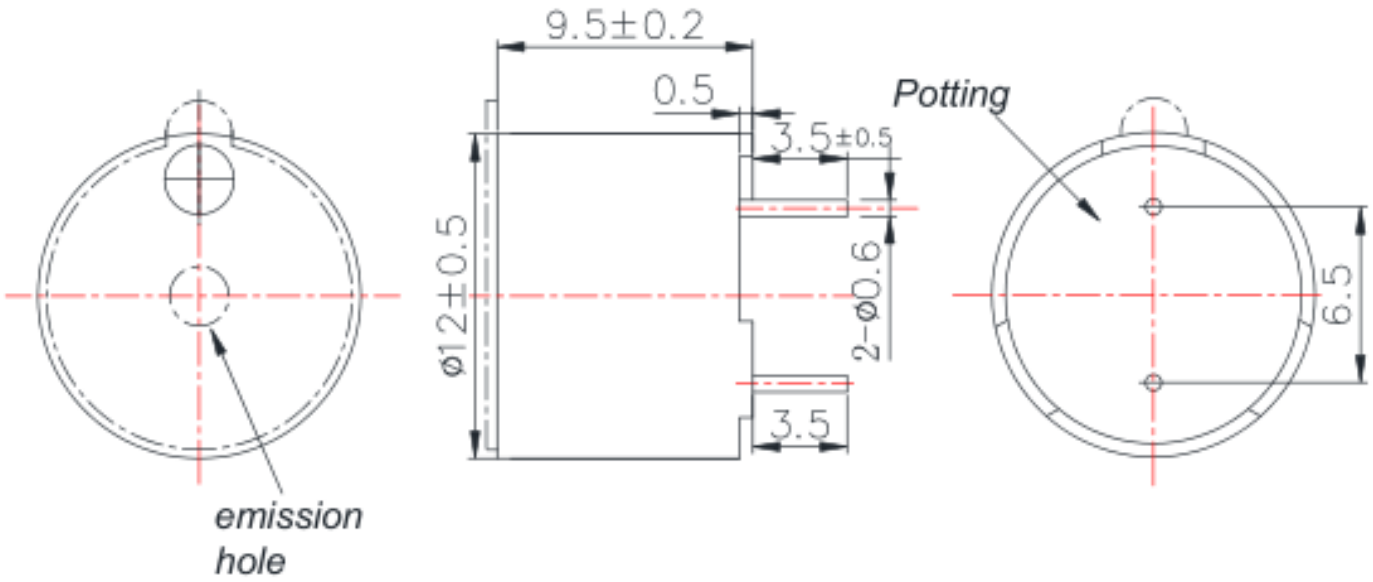

4411 South High School Road, Indianapolis, Indiana 46241 USA ● Phone (317) 612-1000 ● Fax (317) 612-1010 ● http://www.mspindy.com