# Mallory Sonalert Products,Inc.

Part #: **ZT028LAIC3B**

# Sales Outline Drawing

Revision: **D**

## Specifications:


| INDIVIDUAL CONTROL OF LIGHT AND SOUND | | |
|---|---|---|
| Function | LIGHT | SOUND |
| Sound Level Category | N/A | Loud |
| Mode of Operation | Continuous | Slow Pulse @ 1 PPS |
| Lens Color | Opaque White | N/A |
| LED Color | BLUE | N/A |
| Rated Voltage | 24 VAC/DC | 24 VAC/DC |
| Voltage Range | 20 to 28 VAC/DC | 20 to 28 VAC/DC |
| Power Connection | L~ to ~VAC/DC | S~ to ~VAC/DC |
| Current Draw | 25mA MAX | 25mA MAX |
| Frequency | N/A | 3900 ± 500 Hz |
| Loudness @ 2 FT | N/A | 85 to 95 dB(A) Typ. |
| Housing Material | 6/6 Nylon, Color: Black | |
| Front Cap Material | 6/6 Nylon, Color: Opaque White | |
| Storage Temperature | -40° to +80° C | |
| Operating Temperature | -30° to +65° C | |
| Panel Mounting | Recommended hole size is 22.5 mm. Thread front will fit standard 22.5mm hole. | |
| Knurled Nut | Used to attach part to panel. The max recommended torque is 10 in-lbs. | |
| Weight (Typical) | 28 g | |
| NEMA 3R,4X, & 12 | Approved with use of included gasket. | |
| Options | Please contact factory. | |


## Dimensions: Inches (mm)

## cUL Recognized

PATENT NUMBER 9165440
9576442

## ROHS Compliant

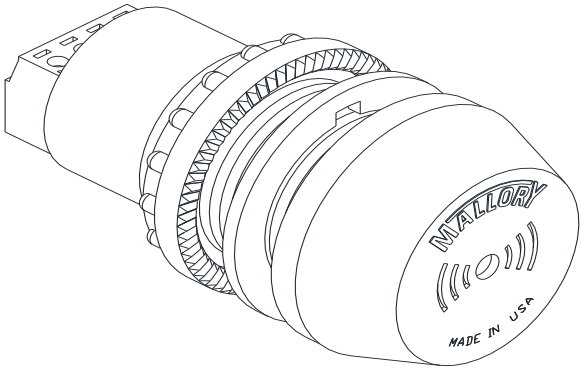

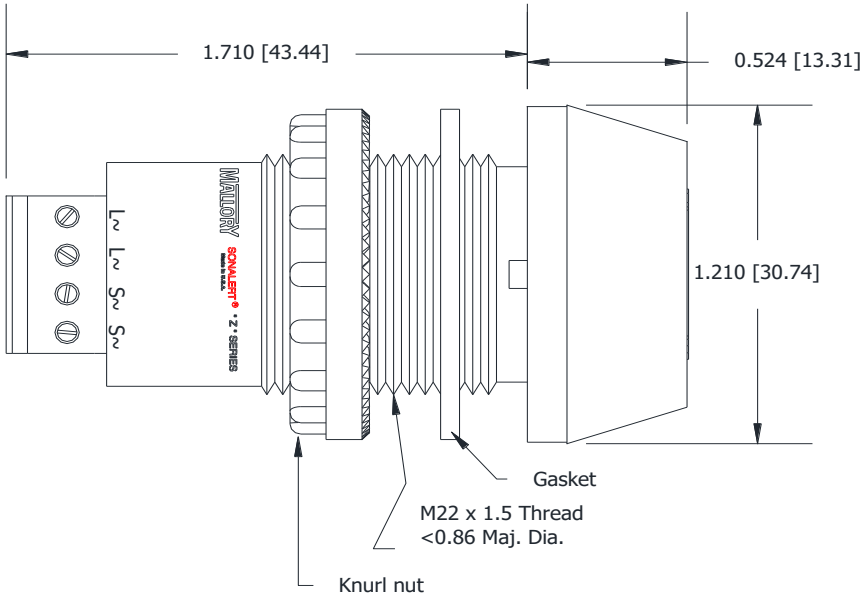
4411 South High School Road, Indianapolis, Indiana 46241 U.S.A · Phone: (317) 612-1000 Fax: (317) 612-1010 www.mspindy.com