
muRata
INNOVATOR IN ELECTRONICS

Discontinued

# SF2200E

## 707 MHz SAW Filter

- ***Surface Mount 3.0 x 3.0 mm Package***
- ***Complies with Directive 2002/95/EC (RoHS)***



**SM3030-6**

### Absolute Maximum Ratings

| Rating | Value | Units |
|---|---|---|
| Input Power Level | 20 | dBm |
| DC Voltage on any Non-ground Terminal | 3 | V |
| Operable Temperature Range | -45 to +125 | °C |
| Specification Temperature Range | -40 to +85 | °C |
| Storage Temperature Range in Tape and Reel | -40 to +85 | °C |
| Solder Reflow Temperature, 10 seconds, 5 cycles maximum | 260 | °C |


### Electrical Characteristics

| Characteristic | Sym | Notes | Min | Typ | Max | Units |
|---|---|---|---|---|---|---|
| Center Frequency | $f_C$ | | | 707 | | MHz |
| Insertion Loss, 698 to 716 MHz | IL | | | 2.1 | 3.0 | dB |
| Amplitude Ripple, 698 to 716 MHz | | | | 0.5 | 1.5 | |
| Return Loss, 698 to 716 MHz | | | 7 | 13 | | |
| Attenuation, 0 dB Reference: | | | | | | dB |
| 10 to 680 MHz | | | 30 | 50 | | |
| 745 to 978 MHz | | | 30 | 42 | | |
| 978 to 996 MHz | | | 35 | 58 | | |
| 996 to 2700 MHz | | | 25 | 29 | | |
| Source Impedance | $Z_S$ | | | 50 | | Ω |
| Load Impedance | $Z_L$ | | | 50 | | |

| | |
|---|---|
| Case Style | SM3030-6 3.0 x 3.0 mm Nominal Footprint |
| Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator | 930, YWWS |
| Standard Reel Quantity Reel Size 7 Inch | 500 Pieces/Reel |
| Reel Size 13 Inch | 3000 Pieces/Reel |

### Electrical Connections

| Connection | Terminals |
|---|---|
| Input | 2 |
| Output | 5 |
| Case Ground | All others |

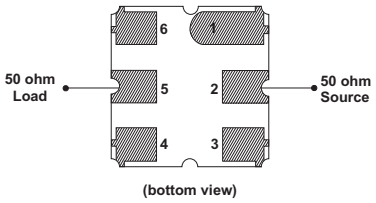



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


**NOTES:**

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.


Copyright ©Murata Manufacturing Co., Ltd. All rights reserved. July 2010

## Filter Response Plots

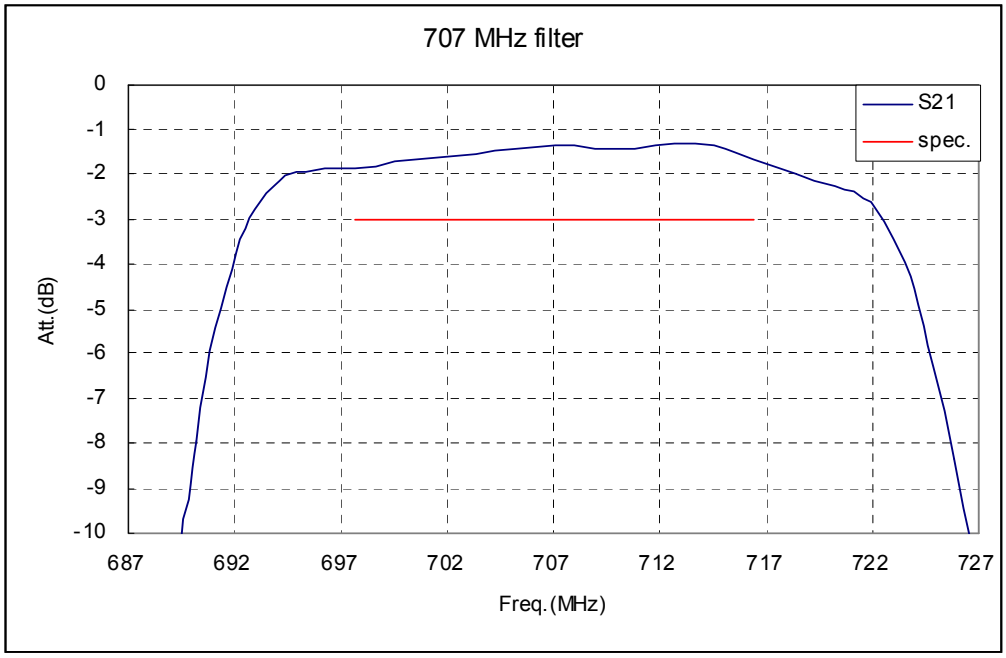

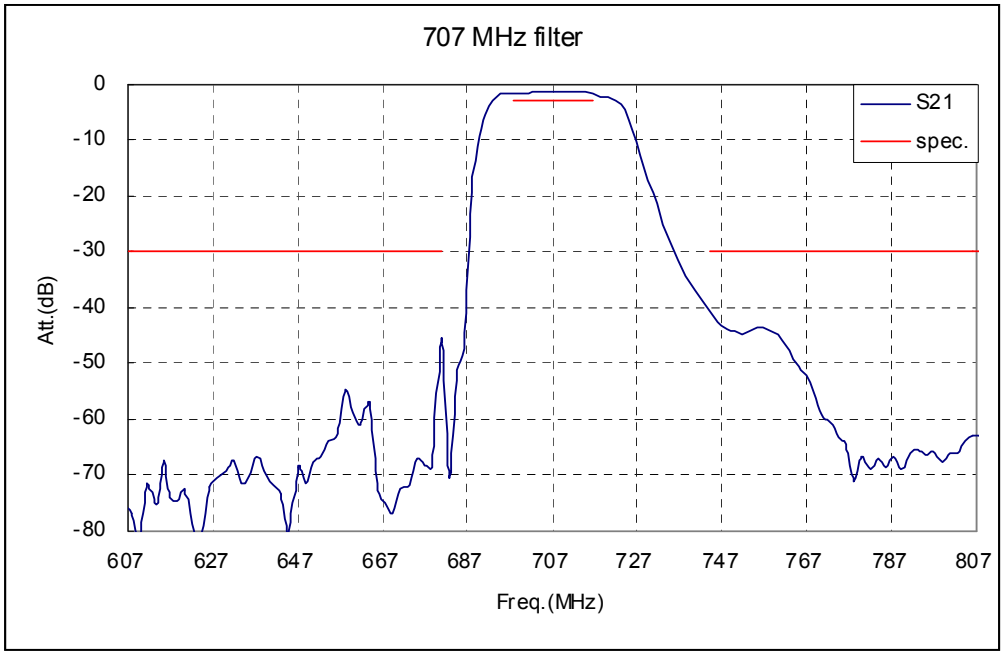

Copyright ©Murata Manufacturing Co., Ltd. All rights reserved. July 2010

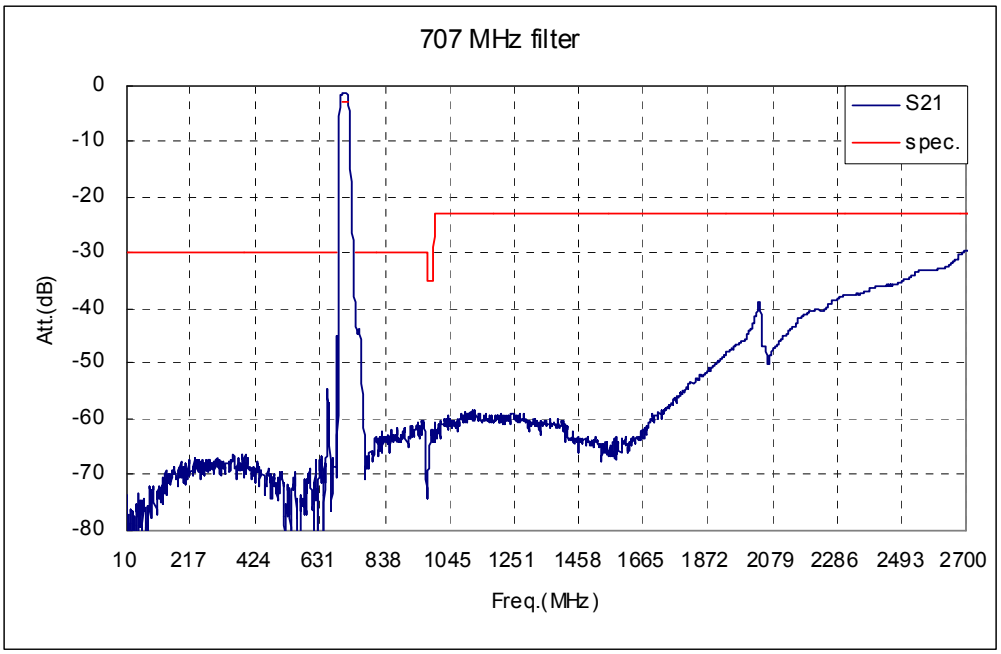



Copyright ©Murata Manufacturing Co., Ltd. All rights reserved. July 2010

# SM3030-6 Case

## 6-Terminal Ceramic Surface-Mount Case
## 3.0 X 3.0 mm Nominal Footprint






**PCB Footprint Top View**


**Case and PCB Footprint Dimensions**


| Dimension | mm | | | Inches | | |
|---|---|---|---|---|---|---|
| | Min | Nom | Max | Min | Nom | Max |
| **A** | 2.87 | 3.00 | 3.13 | 0.113 | 0.118 | 0.123 |
| **B** | 2.87 | 3.00 | 3.13 | 0.113 | 0.118 | 0.123 |
| **C** | 1.12 | 1.25 | 1.38 | 0.044 | 0.049 | 0.054 |
| **D** | 0.77 | 0.90 | 1.03 | 0.030 | 0.035 | 0.040 |
| **E** | 2.67 | 2.80 | 2.93 | 0.105 | 0.110 | 0.115 |
| **F** | 1.47 | 1.60 | 1.73 | 0.058 | 0.063 | 0.068 |
| **G** | 0.72 | 0.85 | 0.98 | 0.028 | 0.033 | 0.038 |
| **H** | 1.37 | 1.50 | 1.63 | 0.054 | 0.059 | 0.064 |
| **I** | 0.47 | 0.60 | 0.73 | 0.019 | 0.024 | 0.029 |
| **J** | 1.17 | 1.30 | 1.43 | 0.046 | 0.051 | 0.056 |
| **K** | | 3.20 | | | 0.126 | |
| **L** | | 1.70 | | | 0.067 | |
| **M** | | 1.05 | | | 0.041 | |
| **N** | | 0.81 | | | 0.032 | |
| **O** | | 0.38 | | | 0.015 | |

**Case Materials**


| Materials | |
|---|---|
| Solder Pad Plating | 0.3 to 1.0 µm Gold over 1.27 to 8.89 µm Nickel |
| Lid Plating | 2.0 to 3.0 µm Nickel |
| Body | $Al_2O_3$ Ceramic |
| Pb Free | |


**TOP VIEW**

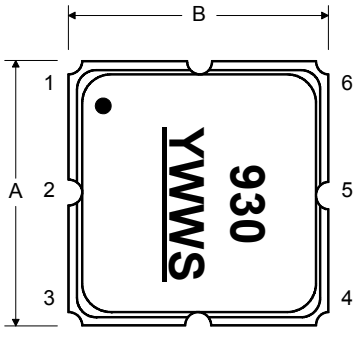

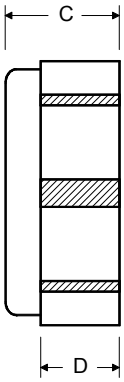

**BOTTOM VIEW**

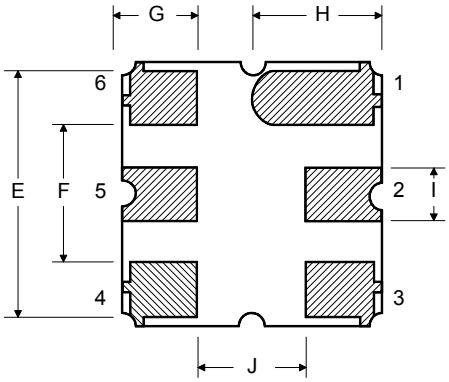


Copyright ©Murata Manufacturing Co., Ltd. All rights reserved. July 2010

**Tape and Reel Specifications**

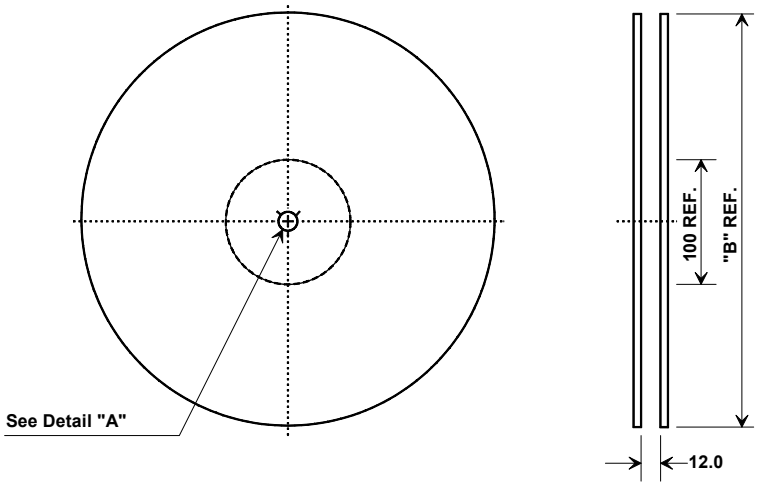



| "B" | | Quantity Per Reel |
|---|---|---|
| Inches | millimeters | |
| 7 | 178 | 500 |
| 13 | 330 | 3000 |

**COMPONENT ORIENTATION and DIMENSIONS**

| Carrier Tape Dimensions | |
|---|---|
| Ao | 3.35 mm |
| Bo | 3.35 mm |
| Ko | 1.40 mm |
| Pitch | 8.0 mm |
| W | 12.0 mm |

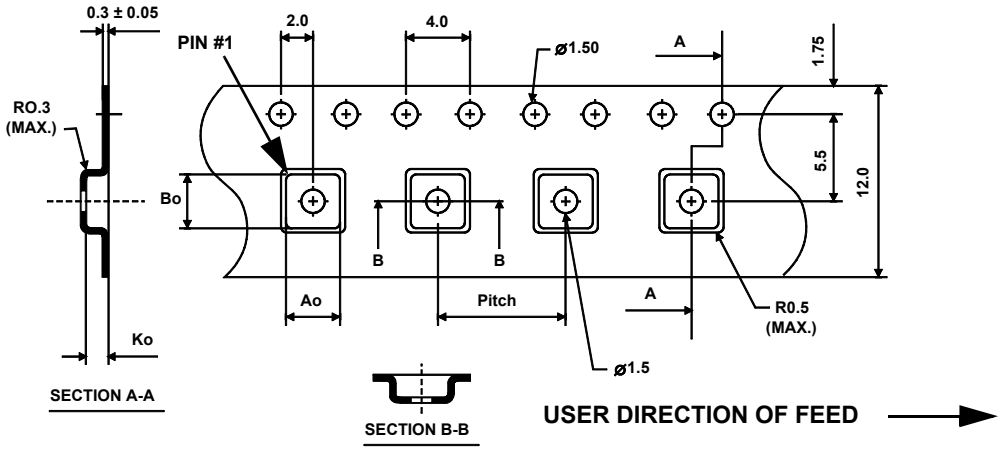


Copyright ©Murata Manufacturing Co., Ltd. All rights reserved. July 2010