
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CMRPSV15SILM	9 lb (4.1 kg)



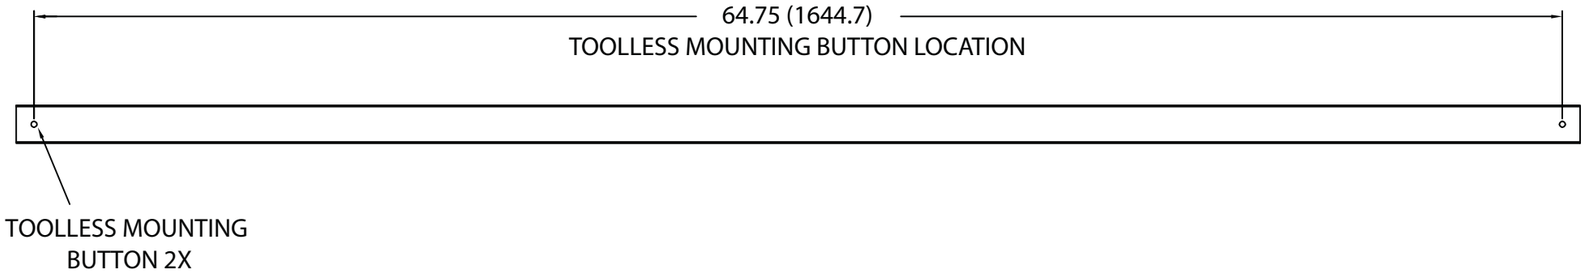


NOTES:
1. IDENTIFICATION: VERTICAL, (20) 5-15R, METERED
   120V / 15A / SINGLE-PHASE POU

PART NO.	COLOR
CMRPSV15SILM	BLACK

2. ACCESSORY COMPONENTS:
   (4) #10-32 x 1/2" MOUNTING SCREWS
   (4) #12-24 x 1/2" MOUNTING SCREWS
   (2) #10-32 LOCKING COLLAR SCREWS
   (2) L-BRACKETS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).
5. SURGE SUPPRESSION UP TO 330V OR 720 JOULES.
6. UL® & c-UL® LISTED 1950.
7. RoHS COMPLIANT.
8. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
9. MAXIMUM AVAILABLE INPUT POWER = 1.4 KW
10. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.



PLUG
15 AMP, 125V, SINGLE-PHASE
STRAIGHT BLADE
NEMA 5-15P



TWENTY (20)
RECEPTACLES
15 AMP, 125V
STRAIGHT BLADE
NEMA 5-15R

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01C	4-26-13	MRWA	KRKE	D. RECEPTACLE RATING WAS 20A	09V098YC			
01B	4-26-13	MRWA	KRKE	C. THERMAL BREAKER WAS 20A	09V098YC			
01A	9-13-12	PIP	MRWA	A. ADDED NOTE #10. B. ADDED BUTTON MOUNTING NOTE.	09V098YC			
00A	10-26-11	MRWA	KRKE	RELEASED TO PRODUCTION	09V098YC			

MODEL FILENAME: 09V098YC/01.PRT
CAD FILENAME/LAYERS: 09V098YC_DC/01C.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

VERTICAL, (20) 5-15R, METERED
POWER OUTLET UNIT
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
INCHES: X.X +/- 0.03; X.XX +/- 0.015; X.XXX +/- 0.005
[METRIC - MILLIMETER]: X. +/- 0.8; X.X +/- 0.4; X.XX +/- 0.13
ANGLE +/- 1°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MRWA
MAT'L:
SCALE: NONE
DATE: 10-26-11
DRAWING NO.: 09V098YC
DWG SIZE: B
CHK'D: KRKE