THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CMRPSV20S	13 lb (5.9 kg)

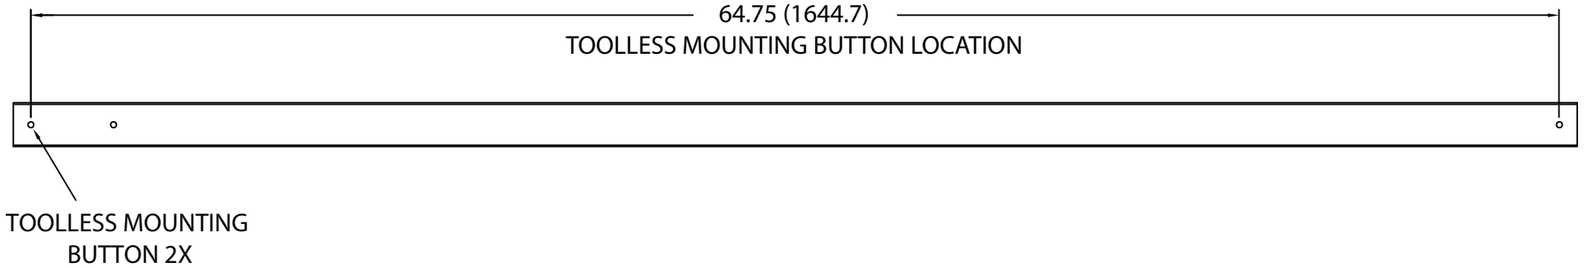

NOTES:
1. IDENTIFICATION: VERTICAL, (20) 5-20R
   120V / 20A / SINGLE-PHASE POU

PART NO.	COLOR
CMRPSV20S	BLACK

2. ACCESSORY COMPONENTS:
   (4) #10-32 x 1/2" MOUNTING SCREWS
   (4) #12-24 x 1/2" MOUNTING SCREWS
   (2) #10-32 LOCKING COLLAR SCREWS
   (2) L-BRACKETS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. SURGE SUPPRESSION UP TO 330V OR 720 JOULES.
5. UL® & c-UL® LISTED 1950.
6. RoHS COMPLIANT.
7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
8. MAXIMUM AVAILABLE INPUT POWER = 1.9 KW
9. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.

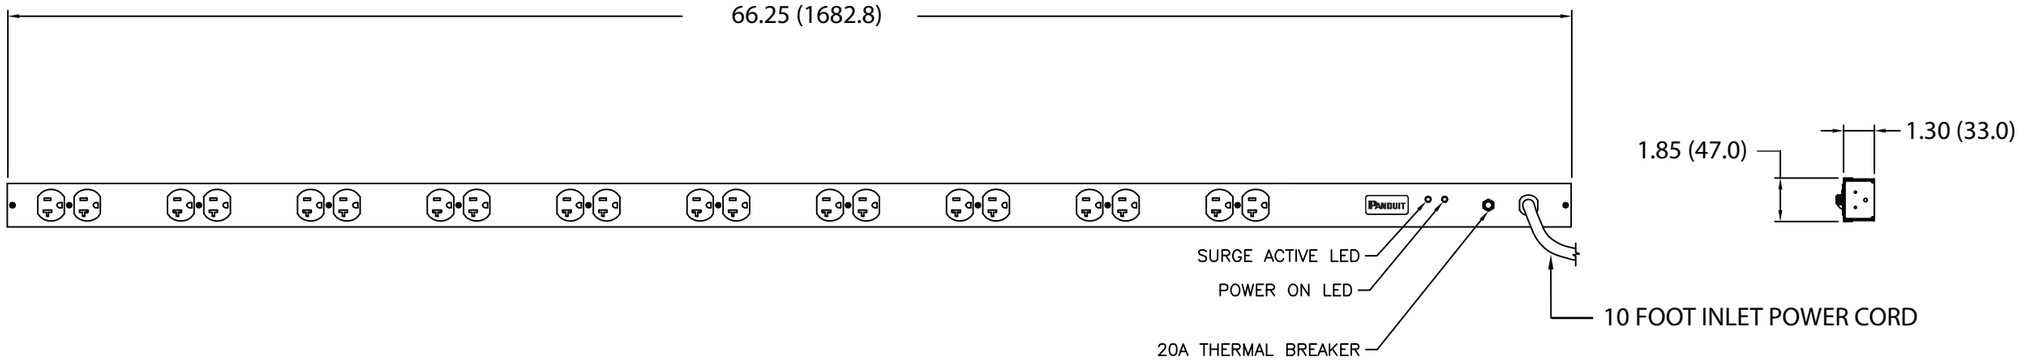



PLUG
20 AMP, 125V, SINGLE-PHASE
STRAIGHT BLADE
NEMA 5-20P



TWENTY (20)
RECEPTACLES
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20R

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01A	9-13-12	PIP	MRWA	A. ADDED NOTE #9.	09V098YM			
00A	10-26-11	MRWA	KRKE	RELEASED TO PRODUCTION	09V098YM			

MODEL FILENAME: 09V098YM/01.PRT
CAD FILENAME/LAYERS: 09V098YM_DC/01A.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

VERTICAL, (20) 5-20R
POWER OUTLET UNIT
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

INCHES		[METRIC - MILLIMETER]		ANGLE
X.X	+/- 0.03	X.	+/- 0.8	+/- 1°
X.XX	+/- 0.015	X.X	+/- 0.4	
X.XXX	+/- 0.005	X.XX	+/- 0.13	

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MRWA
MAT'L:
SCALE: NONE
DATE: 10-26-11
DRAWING NO.: 09V098YM
DWG SIZE: B
CHK'D: KRKE