

Model 2382 & 2439
Single Insulated Miniature Binding Post



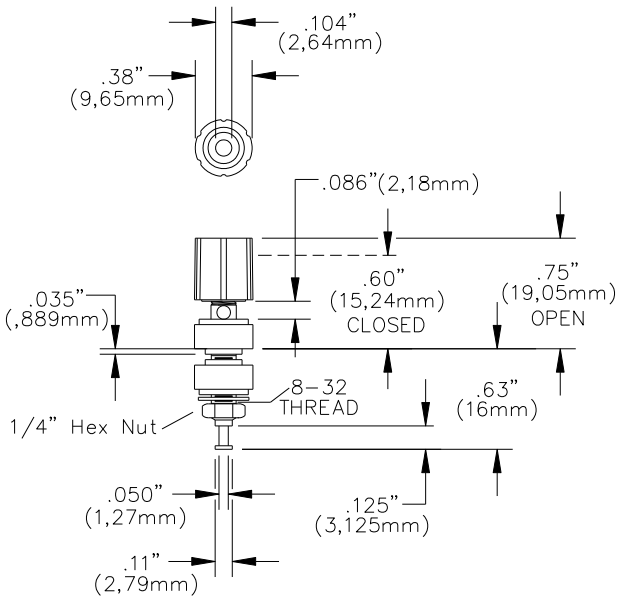



FEATURES:
- ✓ Gold or Tin Plated
- ✓ Panel Thickness .07 (1,78mm) to .170" (4,32mm)
- ✓ Accepts miniature banana plug, wire or spade lug..
- ✓ Hardware Included

MATERIALS:
Insulated Captive Thumb Nut;
Model: 2382, Gold Flash Brass;
Model 2439, Tin Plated Brass
Binding Post Body:
Model: 2382, Gold Plated Brass
Model: 2439, Tin Plated Brass
Solder Turret Terminal: – Gold Flash; 2439 - Tin
Model: 2382, Gold Flash Brass
Model 2439, Tin Plating Brass
Thumb Nut, Mounting Base and Insulator:
Polycarbonate.
Lock washer: Nickel Plated Steel
Hex Nut 1.4" #8-32: Nickel Plated Brass

RATINGS:
Operating Voltage: Hands free usage in controlled voltage environments: 1500 Vrms maximum. *For CE compliance*: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.
Current: 5 Amperes
Operating Temperature: +115°C (+239°F) Max.

ORDERING INFORMATION:
Model 2382-**Color** (Gold)
Color = 0 (Black), 2 (Red), 3 (Orange), 5 (Green), 6 (Blue), 9 (White)

Model 2439-**Color** (Tin)
Color = 0 (Black), 1 (Brown), 2 (Red), 3 (Orange), 5 (Green), 6 (Blue), 9 (White)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 101
D1093913, D1093849