
# Model 3750, 3760 & 3770
# Standard Binding Post



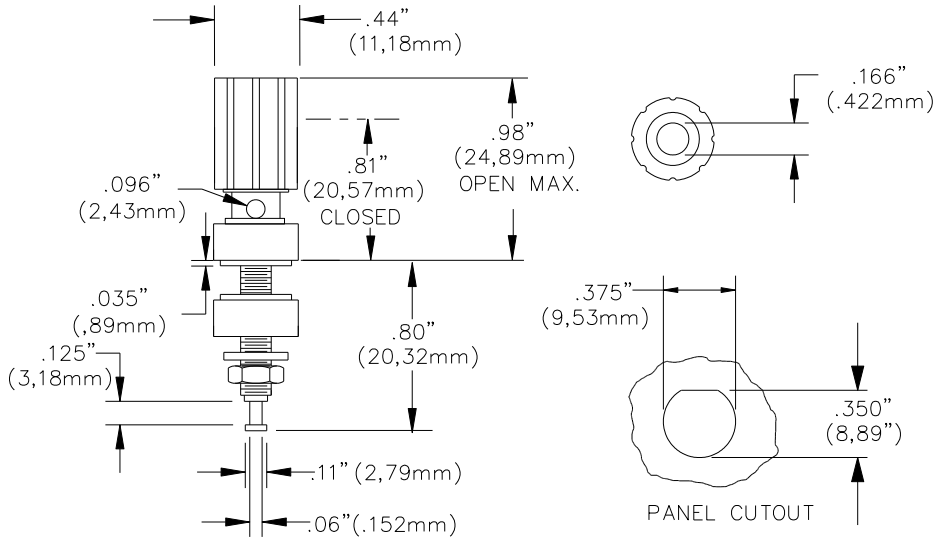


**FEATURES:**

- ✓ Accepts standard banana plug, wire or spade lug.
- ✓ Mounts in panels from .070" to .250" (1.77mm to 6.35mm) thick.

**MATERIALS:**

Insulated Captive Thumb Nut: Brass
Insulation: Polycarbonate
Mounting Base: Polycarbonate
Insulator: Polycarbonate
Lockwasher: Nickel Plated Steel
Hex Nut: ¼" #8-32 Nickel Plated Brass
Binding Post:
Finish: 3750 – Gold plated brass, 3760 – Bright tin plated brass, 3770 – Gold plated Tellurium Copper

**RATINGS:**

Operating Voltage: Hands free usage in controlled voltage environments: 2500 Vrms maximum. *For CE compliance*: not intended for hand-held use at voltage above 33 Vrms/70 Vdc.
Operating Temperature: +239ºF (+115ºC) Max.
Current: 15 Amperes

**ORDERING INFORMATION:**

Model: 3750-**Color** (Gold plated brass) Available in **Colors*** =: 0 (Black, 2 (Red), 3 (Orange), 4 (Yellow), 5 (Green), 6 (Blue), 9 (White)
Model: 3760-**Color** (Bright tin plated brass) Available in **Colors** =: 0 (Black), -2 (Red) 3 (Orange), 4 (Yellow), 5 (Green), 6 (Blue), 7 (Violet), 8 (Gray), 9 (White)
Model: 3770-**Color** (Gold Plated Tellurium Copper) **Colors*** =: 0 (Black), -2 (Red) 8 (Gray), 9 (White)
*Upon request other colors can be quoted.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 101
D1093975, D1093981, D1093927