THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PUI AUDIO, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PUI AUDIO, INC. IS PROHIBITED.
© 2010, PUI AUDIO Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.01	W
MAX INPUT POWER	0.02	W
IMPEDANCE	600±15%	OHM
OUTPUT SPL @ 1KHz, 179mV (IEC 318 COUPLER)	120±3	dBA
DISTORTION (MAX.)	5%	–
FREQUENCY RANGE	100 ~ 10,000	Hz
HOUSING MATERIAL	PLASTIC	–
CONE MATERIAL	MYLAR	–
MAGNET MATERIAL	NdFeB	–
OPERATING TEMPERATURE	−30 ~ +70	℃
WEIGHT	7.5	grams

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
–	RELEASED FROM ENGINEERING	11/12/19	
A	REVISED FREQUENCY RANGE	1/10/2020	M.V

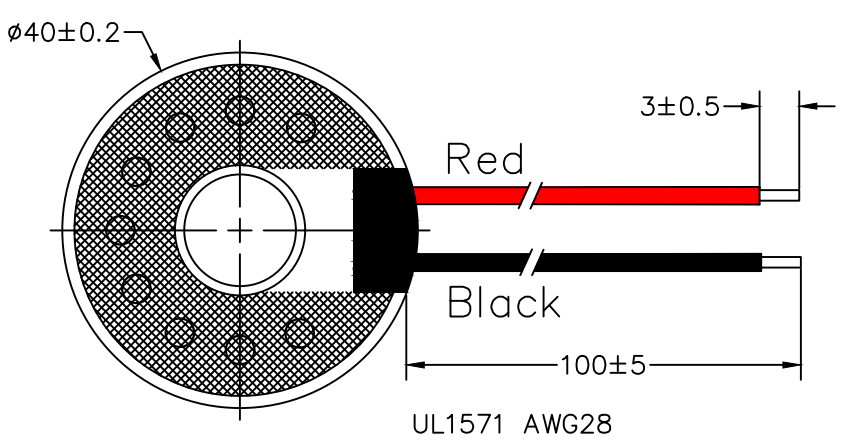

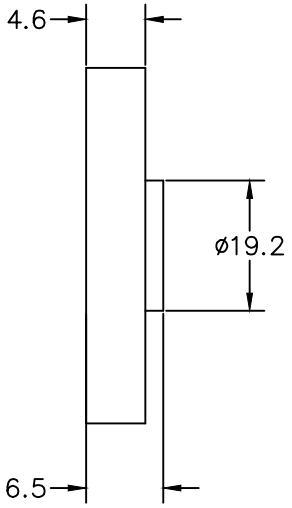

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED:

ALL PURCHASES ARE SUBJECT TO THE PUI AUDIO TERMAS AND CONDITIONS SALE FOUND AT http://www.puiaudio.com/pdf/terms_conditions.pdf (paper copy available upon request).

DIMENSIONS ARE IN MILLIMETERS,TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

pui audio inc

3541 Stop Eight Rd.
Dayton, OH 45414

APPROVALS		DATE
DRAWN	M.L.	11/19
CHECKED	M.L.	11/19
APPROVED	B.R.	11/19

RECEIVER

FILE NAME: AR040600MR-LW100-R.DWG

SIZE: A

DRAWING NO.: AR040600MR-LW100-R

SCALE: N.T.S.

SHEET 1 OF 1