
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2005, Projects Unlimited Inc.


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	1	W
MAX INPUT POWER	1.5	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL @ 0.1W/0.1M (AT 0.8, 1.0, 1.2, 1.5 kHz)	91±3	dBA
DISTORTION (MAX.)	5%	–
RESONANT FREQUENCY	500±20%	Hz
FREQUENCY RANGE	Fo ~ 4,500	Hz
HOUSING MATERIAL	METAL	–
CONE MATERIAL	MYLAR	–
MAGNET MATERIAL	NdFeB	–
OPERATING TEMPERATURE	−30 ~ +60	℃
WEIGHT	12	grams

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
–	RELEASED FROM ENGINEERING	1/30/20	

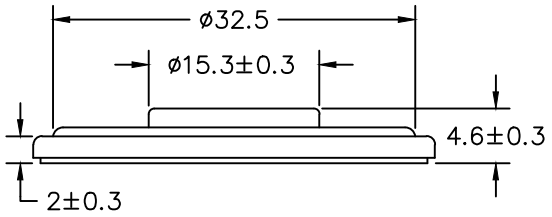

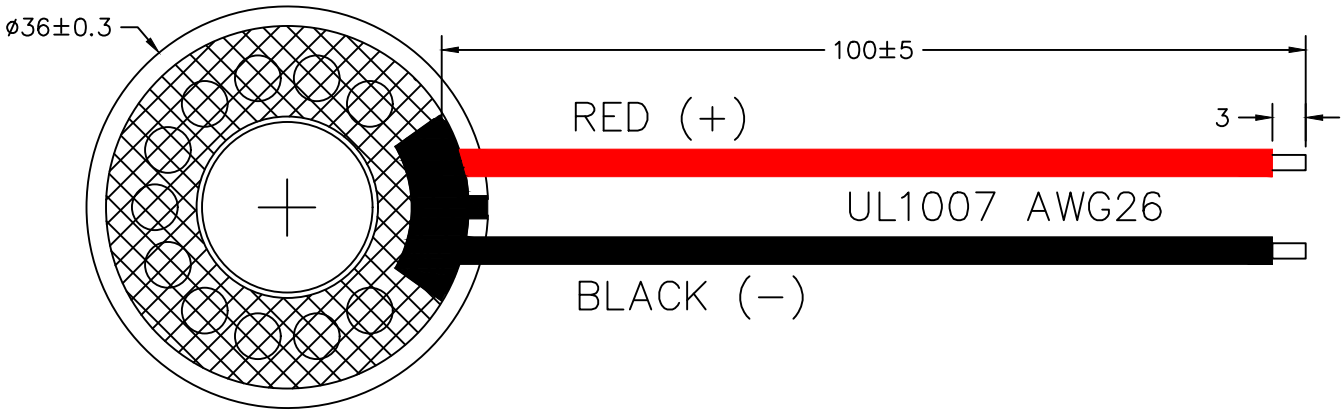

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

BASE SPEAKER: AS03608MR−R

FILE NAME: AS03608MR−LW100−R.DWG

UNLESS OTHERWISE SPECIFIED:
ALL PURCHASES ARE SUBJECT TO THE PUI AUDIO TERMS AND CONDITIONS SALE FOUND AT http://www.puiaudio.com/pdf/terms_conditions.pdf (paper copy available upon request).

DIMENSIONS ARE IN MILLIMETERS,TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

APPROVALS		DATE
DRAWN	M. V.	1/20
CHECKED	M. V.	1/20
APPROVED	B.R.	1/20

pui audio INC
3541 Stop Eight Road
Dayton, Ohio 45414

SPEAKER

SIZE A | DRAWING NO. AS03608MR−LW100−R

SCALE: N.T.S. | SHEET 1 OF 1