Product data sheet
Characteristics

389FXCXC1-12D
Power relay, SE Relays, 3PDT, 20A, 12 VDC, side flange cover



Main

Product Type	Power relay
Switch Function	3PDT
Contact Composition	3 NO + 3 NC

Complementary

Input Current	20 A
Short Circuit Current	3 kA
Associated Fuse Rating	32 A gG at 400 V coordination type 2 for power circuit
Average Pole Impedance	4 mOhm
Contacts Material	Silver alloy contacts
Wire Strip Length	0.3 in (8 mm)
Minimum Switching Current	100 mA 5 V DC
Coil Resistance	100 Ohm
Input voltage	12 V DC
Drop-out Voltage Threshold	>= 0.1 Uc AC/DC
Rated Operational Current	20 A at 150 V AC (on resistive load) conforming to UL 15 A at 250 V AC (on resistive load) conforming to UL 13 A at 28 V DC (on resistive load) conforming to UL 20 A at 150 V AC (ballast) conforming to UL 6.67 A at 277 V AC (ballast) conforming to UL 20 A at 250 V AC (NO/NC) conforming to IEC 15 A at 28 V DC (NO/NC) conforming to IEC
Power consumption in W	1.3 W DC
Power consumption in VA	2 VA AC
Voltage Range	0.8...1.1 Uc DC
Maximum Switching Voltage	300 V AC
Motor Power HP	0.5 hp 120/240 V AC 50/60 Hz
Connections Terminals	Quick
Mounting	Flange
Product Weight	3.0 oz (84 g)

Environment

Ambient Air Temperature for Operation	-22…131 °F (-30…55 °C)
Ambient Air Temperature for Storage	-22…185 °F (-30…85 °C)
Product Certifications	cURus[RETURN]CSA[RETURN]CE
Electrical Durability	100000 Cycles resistive load 50000 cycles resistive DC load
Mechanical Durability	5000000 cycles

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

IP Degree of Protection	IP40
Dielectric Strength	2200 V AC between coil and contact 2200 V AC between poles 1600 V AC between contacts

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3606480276927
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.50 in (3.81 cm)
Package 1 Width	1.60 in (4.06 cm)
Package 1 Length	3.0000000000 in (7.62 cm)
Package 1 Weight	0.20 lb(US) (0.09 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Connections and Wiring Diagrams

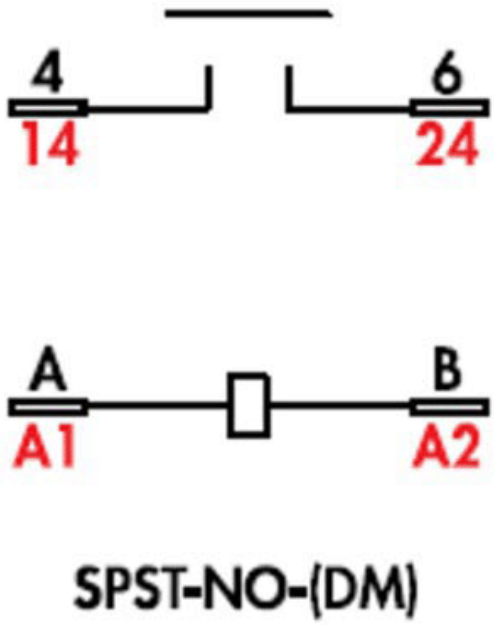

Connections and Wiring Diagrams

