Micro Battery
MS Lithium Rechargeable Battery
MS421R (Reflowable)
MS621R (Reflowable)
MS414GE
MS412FE
MS518SE
MS614SE
MS621FE
MS920SE
MS621T (Wide temperature range)
MS920T (Wide temperature range)
TS Lithium Rechargeable Battery
TS621E
TS920E
ML Lithium Rechargeable Battery
ML414H
Chip type Electric Double Layer Capacitor
CPH3225A
CPX3225A752D
CPM3225A
Silver Oxide Battery
SEIZAIKEN
Cross reference chart
SEIZAIKEN's new usage except watches
Silver Oxide Battery Expiration Guide
For Your Safety
Micro battery's new challenge for medical devices
Support
Global Network
Contact Us
Sitemap

Micro Battery Products Catalog
PDF DOWNLOAD

MS Lithium Rechargeable Battery MS414GE

SPECIFICATIONS

Type	MS414GE
Nominal Voltage(V)	3
Charge Voltage (Standard Charge Voltage)(V)	2.8 to 3.3(3.1)
Nominal Capacity(mAh)	2.0
Internal Impedance(Ω)	100
Standard Discharge Current(mA)	0.010
Maximum Discharge Current (Continuous)(mA)	0.05
Cycle Life (Time)100% D.O.D(Depth of Discharge)	50
Cycle Life (Time)20% D.O.D(Depth of Discharge)	500
Size Diameter(mm)	4.8
Size Height(mm)	1.4
Weight(g)	0.08



MS414GE FL26E

Terminals



Click to enlarge

MS414GE is not reflowable. Please mount them on PCB by hand soldering.

CHARACTERISTICS

Click to enlarge.

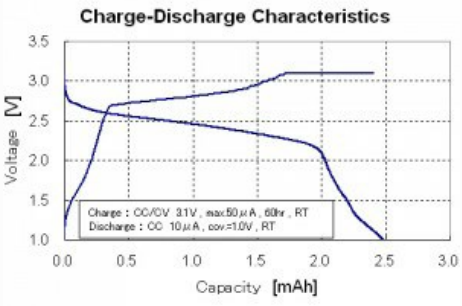

CHARACTERISTICS

Please contact us for more details.

Inquiry Form

Copyright © Seiko Instruments Inc. 2020, All Rights Reserved.