
SMD Power Inductor
CDRR126



Description
- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 12.8 × 12.8 × 6.8 mm Max.
- Product weight: 2.9 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Qualification to AEC-Q200.


Dimension - [mm]

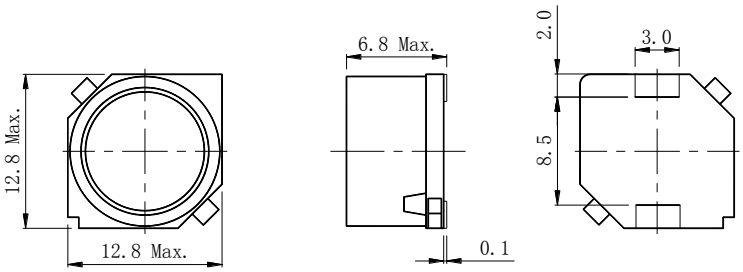

Environmental Data
- Operating temperature range: -40℃～+125℃ (including coil's self temperature rise)
- Storage temperature range: -40℃～+125℃
- Solder reflow temperature: 260 ℃ peak.

Packaging
- Carrier tape and reel packaging.
- 13.0"diameter reel
- 500pcs per reel

Land pattern and Schematics - [mm]

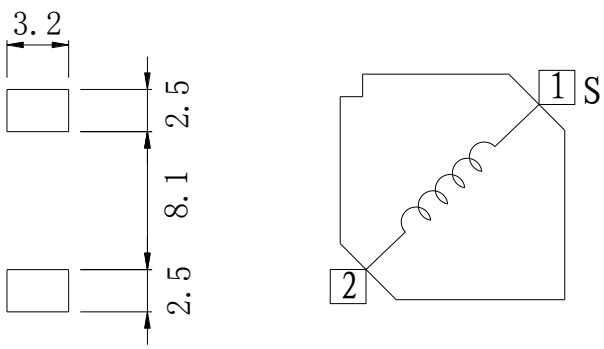

Applications
- For consumer electronics :DVD player, person computer, LCD display, etc.
- For automotive: ABS, SRS airbag, HID/LED, ca audio, car navigation, LCD display, etc.

Revised: 10-Jan-17

Electrical Characteristics

Part No.	Stamp	Inductance ［Within］※1	D.C.R. (Ω) [Max.] (Typ.) (at 20℃)	Saturation current (A) ※2		Temperature rise current (A) ※3
				(at 25℃)	(at 125℃)	
CDRR126NP-7R0NC	7R0	7.0μH±30%	28m(22m)	5.00(6.25)	3.84(4.80)	4.62(5.30)
CDRR126NP-100MC	100	10μH±20%	33m(26m)	4.30(5.38)	3.32(4.15)	4.18(4.70)
CDRR126NP-150MC	150	15μH±20%	38m(30m)	3.68(4.60)	2.87(3.59)	3.73(4.25)
CDRR126NP-220MC	220	22μH±20%	45m(36m)	3.08(3.85)	2.26(2.82)	3.30(3.80)
CDRR126NP-330MC	330	33μH±20%	66m(53m)	2.28(2.85)	1.76(2.20)	2.65(3.20)
CDRR126NP-470MC	470	47μH±20%	80m(64m)	2.08(2.60)	1.56(1.95)	2.52(2.86)
CDRR126NP-680MC	680	68μH±20%	0.118(95m)	1.68(2.10)	1.28(1.60)	2.00(2.30)
CDRR126NP-101MC	101	100μH±20%	0.166(0.133)	1.36(1.70)	1.03(1.29)	1.60(1.83)
CDRR126NP-151MC	151	150μH±20%	0.234(0.187)	1.10(1.37)	0.83(1.04)	1.33(1.53)
CDRR126NP-221MC	221	220μH±20%	0.371(0.297)	0.90(1.12)	0.71(0.89)	1.09(1.22)
CDRR126NP-331MC	331	330μH±20%	0.538(0.430)	0.77(0.96)	0.61(0.76)	0.88(1.00)

※1. Measuring condition: at 1kHz.


※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is △t＝40℃(Ta＝20℃).


Saturation Current & Temperature Rise Graph

L (25℃) L (125℃) △T


1. CDRR126NP-7R0NC

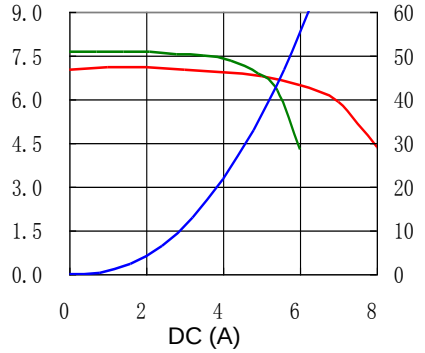


2. CDRR126NP-100MC

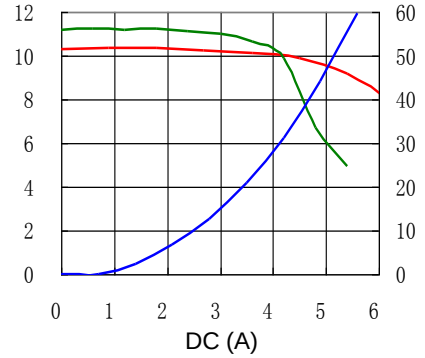


3. CDRR126NP-150MC

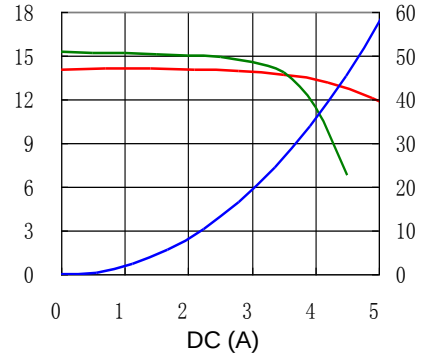


4. CDRR126NP-220MC

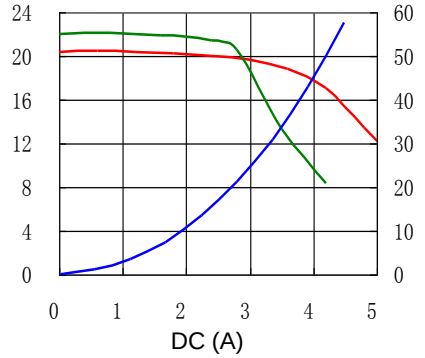


5. CDRR126NP-330MC

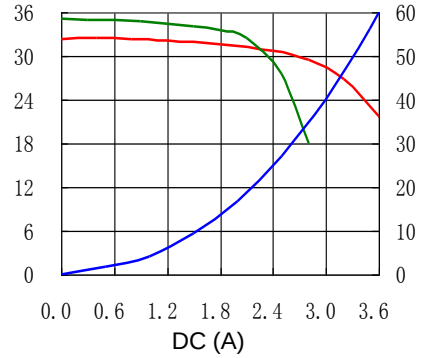


6. CDRR126NP-470MC

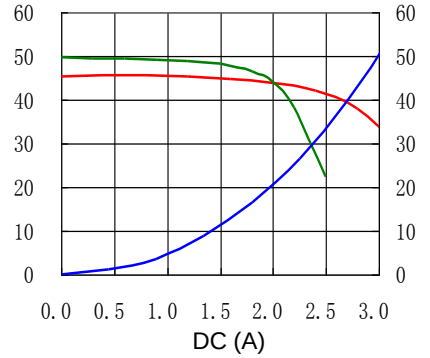


7. CDRR126NP-680MC

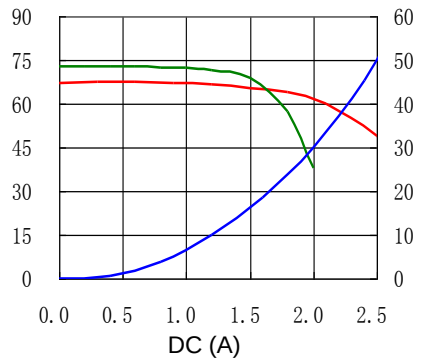


8. CDRR126NP-101MC

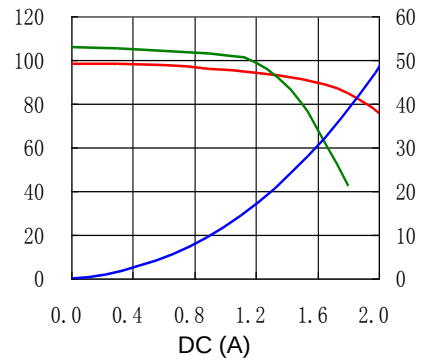


9. CDRR126NP-151MC

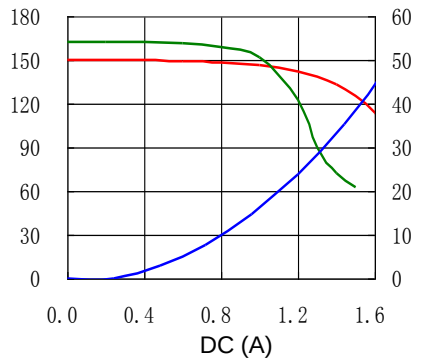

10. CDRR126NP-221MC

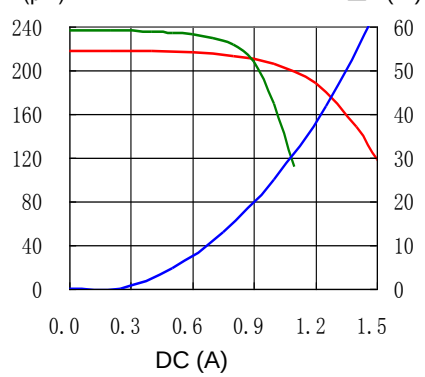


11. CDRR126NP-331MC

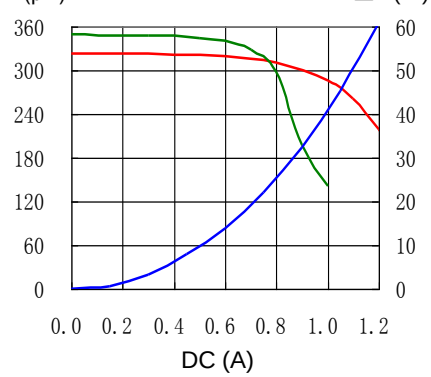


Solder Reflow Condition

Heat Endurance

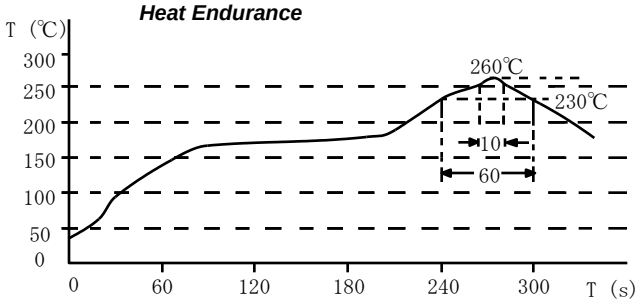

Temperature Chart

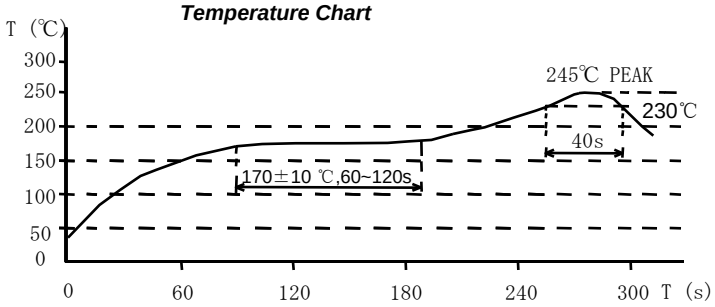

Please refer to the sales offices on our website - http://www.sumida.com

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Obernzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com