Wire-wound Metal Power Inductors MCOIL™ LCDN series for Automotive Body & Chassis and Infotainment

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

AEC-Q200 Grade 3 (we conduct the evaluation at the test condition of Grade 3.)
*Operating environment Temp:-40～85℃

REFLOW
AEC-Q200

■PART NUMBER　　*Operating Temp. :　-40～125℃(Including self-generated heat)

L	C	D	N	D	2	0	2	0	K	K	T	1	R	0	M	M	
①				②	③				④		⑤	⑥			⑦	⑧	⑨

①Series

Code (1)(2)(3)(4)	
LCDN	Wire-wound Metal Power Inductor for Automotive Body & Chassis and Infotainment

(1) Product Group

Code	
L	Inductors

(2) Category

Code	Recommended equipment	Quality Grade
C	Automotive Electronic Equipment (Body & Chassis, Infotainment)	2

(3) Type

Code	
D	Metal Wire-wound (Drum type)

(4) Features, Characteristics

Code	
N	Standard Power choke

②Features

Code	Feature
D	Bottom electrode (Ag × solder)

③Dimensions (L × W)

Code	Dimensions (L × W) [mm]
2020	2.0 × 2.0
3030	3.0 × 3.0
4040	4.0 × 4.0

④Dimensions (H)

Code	Dimensions (H) [mm]
KK	1.0
MK	1.2
WK	2.0

⑤Packaging

Code	Packaging
T	Taping

⑥Nominal inductance

Code (example)	Nominal inductance [μH]
R47	0.47
1R0	1.0
4R7	4.7

※R=Decimal point

⑦Inductance tolerance


Code	Inductance tolerance
M	±20%
N	±30%


⑧Special code

Code	Special code
F	Ferrite coating
M	Metal coating

⑨Internal code

STANDARD EXTERNAL DIMENSIONS

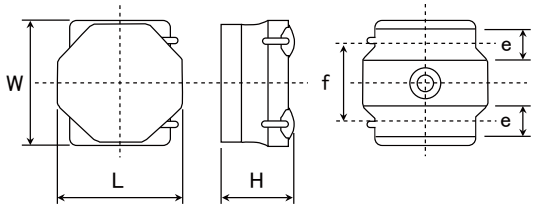



Type	A	B	C
2020	0.65	1.35	2.0
3030	0.8	2.2	2.7
4040	1.2	2.8	3.7

Unit : mm

Type	L	W	H	e	f	Standard quantity [pcs] Taping
2020KK	2.0±0.15 (0.079±0.006)	2.0±0.15 (0.079±0.006)	1.0 max (0.039 max)	0.50±0.2 (0.02±0.008)	1.25±0.2 (0.049±0.008)	2500
2020MK	2.0±0.15 (0.079±0.006)	2.0±0.15 (0.079±0.006)	1.2 max (0.047 max)	0.50±0.2 (0.02±0.008)	1.25±0.2 (0.049±0.008)	2500
3030KK	3.0±0.1 (0.118±0.004)	3.0±0.1 (0.118±0.004)	1.0 max (0.039 max)	0.90±0.2 (0.035±0.008)	1.9±0.2 (0.075±0.008)	2000
3030MK	3.0±0.1 (0.118±0.004)	3.0±0.1 (0.118±0.004)	1.2 max (0.047 max)	0.90±0.2 (0.035±0.008)	1.9±0.2 (0.075±0.008)	2000
4040MK	4.0±0.2 (0.157±0.008)	4.0±0.2 (0.157±0.008)	1.2 max (0.047 max)	1.1±0.2 (0.043±0.008)	2.5±0.2 (0.098±0.008)	1000
4040WK	4.0±0.2 (0.157±0.008)	4.0±0.2 (0.157±0.008)	2.0 max (0.079 max)	1.1±0.2 (0.043±0.008)	2.5±0.2 (0.098±0.008)	700

Unit : mm (inch)

▸ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .