KHAU-17A12-24 ✔ ACTIVE

Potter & Brumfield | Potter & Brumfield KHA

TE Internal #: 2-1393122-9

Power Relays, General Purpose Power Relay, Monostable, 1.25 VA Coil Power Rating AC, 160 Ω Coil Resistance, Potter & Brumfield KHA

View on TE.com >

Relays & Contactors > Relays > Power Relays



Relay Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Coil Power Rating Class: **[1 – 2 VA]**

Coil Power Rating AC: **1.25 VA**

Coil Resistance: **160 Ω**

Features

Product Type Features

Relay Type	General Purpose Power Relay

Configuration Features

Coil Special Features	UL Coil Insulation Class B
Contact Arrangement	4 Form C (CO)
Number of Poles	4

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	5 A
Contact Limiting Short-Time Current	5 A
Contact Limiting Continuous Current	5 A
Insulation Initial Dielectric Between Adjacent Contacts	1500 Vrms
Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms
Insulation Initial Resistance	100 MΩ
Contact Limiting Breaking Current	5 A
Coil Power Rating AC	1.25 VA
Coil Resistance	160 Ω
Coil Voltage Rating	24 VAC
Contact Current Rating	5 A

Contact Switching Load (Min)	300mA @ 12V
Contact Voltage Rating	240 VAC

Body Features

Product Weight	45 g[1.587 oz]

Contact Features

Contact Material	AgCdO

Termination Features

Relay Connection Type	Plug-In
Terminal Configuration	Solder Terminals

Mechanical Attachment

Product Mounting Feature Type	Mounting Studs
Product Mount Type	Socket

Dimensions

Product Width	21.82 mm[.859 in]
Product Length	28.17 mm[1.1 in]
Product Height	32.54 mm[1.28 in]

Usage Conditions

Environmental Category of Protection	RTI
Environmental Ambient Temperature (Max)	70 °C[158 °F]
Operating Temperature Range	-45 – 70 °C

Operation/Application

Actuating System	AC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Tray

Other

Length Class (Mechanical)	25 – 30 mm
Environmental Ambient Temperature Class	50 – 70 °C
Height Class (Mechanical)	30 – 40 mm
Width Class (Mechanical)	20 – 25 mm
	1 – 2 VA

Contact Current Class	16 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Cadmium oxide (7.95% in Component part) **Article Safe Usage Statements:** Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 1-1393143-9
27E166=SOCKET,KH,14,SCW,PLES




TE Part # 2-1419106-6
27E894=SOCKET,KH,14,SCW,POLY,N



TE Part # 1419106-1
27E006=SOCKET,KH,14,SLG,G/T,PH




TE Part # 1419106-2
27E007=SOCKET,KH,14,PC,PHEN,BL

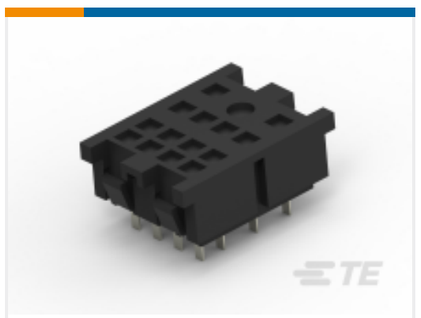

TE Part # 1419106-3
27E023=SOCKET,KH,14,PC,PHEN,BL

Also in the Series | Potter & Brumfield KHA

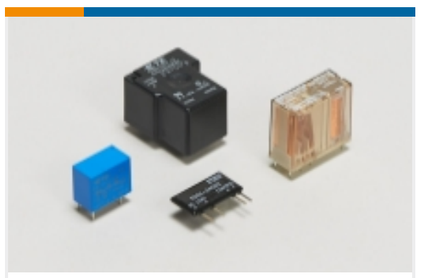


Power Relays(27)



Relay Accessories, Sockets & Clips(5)

Customers Also Bought



TE Part #1-206070-0
CABLE CLAMP KIT, BULK PKG



TE Part #4-1879071-4
THS50 270R 5%



TE Part #52949-1
PG SPR SPD 22-16COMM 22-18MIL6



TE Part #2842282-6
6P,2MM,SHRD HDR,DRVT,0.1AU,TB



TE Part #1-2176412-2
5W XSM M/OX 5% 15R



TE Part #1-2176412-5
5W XSM M/OX 5% 20R



TE Part #1757836-2
AMPLIMITE,R/A RCPT ASY,109,ZN,2



TE Part #1-66103-9
III+ PIN,24-20,TIN,SMPACK

TE Part #4-1393159-6
20C314=SPRING,HOLD,DOWN,KUP

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1393122-9_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1393122-9_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1393122-9_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

KHA General Purpose Dry Circuit to 5A Multicontact AC or DC Relay

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

UL

English