OJT-SS-124LM,000 ✔ ACTIVE

OEG | OEG Miniature PCB Relay OJT

TE Internal #: 1461492-7

Power Relays, General Purpose Power Relay, Monostable, 250 mW Coil Power Rating DC, 2304 Ω Coil Resistance, OEG Miniature PCB Relay OJT

View on TE.com >

Relays & Contactors > Relays > Power Relays > STD OEG PCB OSA Power Relays



Relay Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **250 mW**

Coil Resistance: **2304 Ω**

Coil Special Features: **UL Coil Insulation Class F**

All STD OEG PCB OSA Power Relays (7)

Features

Product Type Features

Relay Type	General Purpose Power Relay

Configuration Features

Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	1 Form A (NO)
Contact Number of Poles	1

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	5 A
Contact Limiting Short-Time Current	5 A
Contact Limiting Continuous Current	5 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Contact Limiting Breaking Current	5 A

Coil Power Rating DC	250 mW
Coil Resistance	2304 Ω
Coil Voltage Rating	24 VDC
Contact Current Rating	5 A
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	250 VAC
Contact Voltage Rating	250 VAC

Body Features

Product Weight	6 g[.211 oz]

Contact Features

Contact Material	AgSnO

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board

Dimensions

Insulation Clearance Between Contact & Coil	6.4 mm[.251 in]
Insulation Creepage Between Contact & Coil	6.4 mm[.251 in]
Product Width	10.2 mm[.401 in]
Product Length	18.2 mm[.716 in]
Product Height	15.2 mm[.598 in]

Usage Conditions

Environmental Category of Protection	RTII
Environmental Ambient Temperature (Max)	85 °C[185 °F]

Operation/Application

Actuating System	DC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Box & Tray, Tray

Other

Length Class (Mechanical)	16 – 20 mm
Insulation Initial Dielectric Between Coil & Contact Class	3500 – 4000 V
Environmental Ambient Temperature Class	50 – 70 °C
Height Class (Mechanical)	14 – 15 mm
Coil Power Rating Class	200 – 300 mW
Width Class (Mechanical)	10 – 12 mm
Contact Current Class	16 A

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

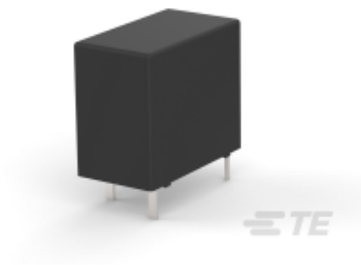

TE Part # CAT-OE4-OJ7
STD OEG PCB OSA Power Relays

Also in the Series | OEG Miniature PCB Relay OJT

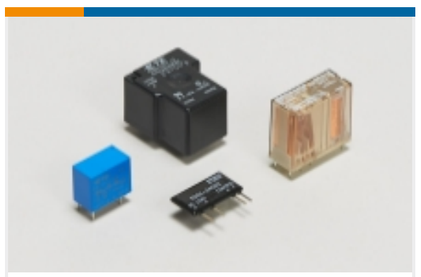

Power Relays(7)

Customers Also Bought



TE Part #20017615-05
VCS-05 Liquid Level Sensor



TE Part #2-2301994-3
RJ45 JACK INT.MAG. 1GB LED 1X1



TE Part #2213756-4
3 ROW 15P HIGH TEMP UMNL SKT ASSM



TE Part #4-1879127-0
RN 0402 340R 0.1% 10PPM CUT LENGTH

TE Part #1-1969609-1
11P VAL-U-LOK TPA 26-22 AWG

TE Part #2-2201196-4
0.4 STACKING CONN H0.98 PLUG ASSEMBLY

TE Part #2-1624116-6
BMB-A 0603 40R N8

Documents

Product Drawings

OJT-SS-124LM,000

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1461492-7_C3.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1461492-7_C3.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1461492-7_C3.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

OJT Series Relay Datasheet

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English