TE Connectivity: Every Connection Counts
© 2017 TE Connectivity Ltd. family of companies. All Rights Reserved

RELAYS, CONTACTORS & SWITCHES

1/5-SIZE RELAYS

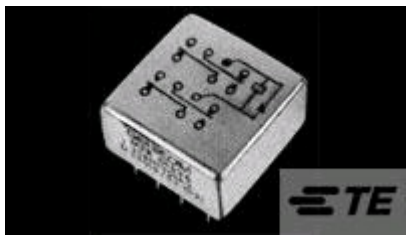

✔ Active

TE CONNECTIVITY (TE)

3SBH5004K1R = RELAY

CII

3SBH5004K1R
TE Internal Number: 4-1617076-4

Not EU RoHS Compliant
Not EU ELV Compliant

Contact Arrangement 4 Form C, 4PDT, 4 C/O

Input Voltage (VDC) 26.5

Coil Suppression Diode Without

Contact Current Rating (A) 2

Coil Voltage Rating (VDC) 26.5

3D PDF

DOCUMENTATION

CAD Files

3D PDF

PDF

3D

Customer View Model

2D_DXF.ZIP

English

Customer View Model

3D_IGS.ZIP

English

Customer View Model

3D_STP.ZIP

English

Catalog Pages/Data Sheets

5-1773450-5_sec1_3SBH

PDF

English

FEATURES

Please review product documents or contact us for the latest agency approval information.

Product Type Features

MOSFET Driver Without
Product Type Relay
Coil Latching Without
Relay Type Military/Aerospace High Performance
Enclosure Type Hermetically Sealed

Configuration Features

Transistor Driver Without

Electrical Characteristics

Coil Polarity Protection Diode Without
Coil Power Measurement Milliwatts
Input Voltage (VDC) 26.5
Coil Suppression Diode Without
Coil Voltage Rating (VDC) 26.5
Coil Resistance (Ω) 720
Coil Power Rating (DC) (mW) 975
Shock 100G's, 11ms
Coil Magnetic System Non-Polarized, Monostable
Vibration 30G's, 10 – 3000Hz
Actuating System DC

Contact Features

Contact Arrangement 4 Form C, 4PDT, 4 C/O
Contact Current Rating (A) 2

Termination Features

Termination Type PC Pins

Mechanical Attachment

Mounting Type Printed Circuit Board

Usage Conditions

Operating Temperature Range (°C) -65 – 125

PRODUCT COMPLIANCE

Statement of Compliance

Statement of Compliance

PDF