
T9G series, DC coil 30A PCB Relay

- **30A switching in NO and 20A in CO**
- **40A UL rating available**
- **Minimum Board space (29mm x 21.5mm)**
- **Meets UL 508 for clearance / creepage**
- **Meets IEC 61810-1 for reinforced insulation**
- **Option for load connections via 0.250" (6.3mm) quick connect terminals**
- **4kV dielectric withstand and 8kV surge voltage between coil & contacts**
- **UL approved for 480 VAC switching**
- **WG versions are in accordance with IEC 60335-1**

Typical applications
HVAC, Appliances, Industrial Controls, Energy Management

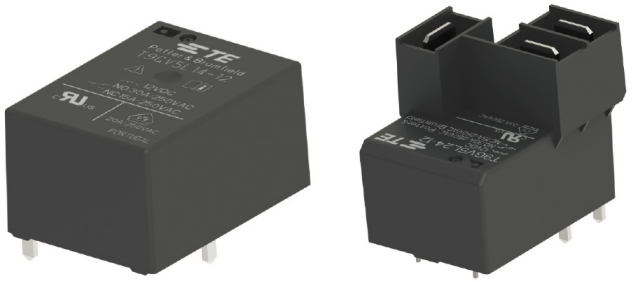

Approvals

UL 508; UL Listing #E214025
IEC 61810-1; VDE Listing #40045012;
CQC 18002196927 (only for standard version; in preparation for WG version)

Technical data of approved types on request

Contact Data

Contact arrangement	1 form A (NO), 1 form B (NC), 1 form C (CO)		
Rated voltage	250VAC		
Max. switching voltage	480VAC		
Rated current	30A	20A	20A
Contact material	AgSnO		
Min. recommended contact load	1A, 12VAC/VDC		
Initial contact resistance	300mΩ at 100mA/6VDC		
Frequency of operation, with/without load	360 cycles / hour = with 3600 cycles / hour = without		
Operate/release time max., including bounce	15/22ms		

Contact ratings [1]

UL 508

Type	Load	Cycles
NO	5A, 480VAC, General Purpose	$6x10^3$
NO	15,6A, 480VAC, Resistive	$100x10^3$
NO	30A, 277VAC, General Purpose, 85°C	$100x10^3$
NO	18A, 250VAC, Resistive, 105°C	$100x10^3$
NO	22A, 250VAC, Resistive	$250x10^3$
NO	22A FLA, 98A LRA, 120VAC, Def. Purpose	$100x10^3$
NO	14A FLA, 82A LRA, 250VAC, Def. Purpose, 70°C	$30x10^3$
NO	20A, 277VAC, Standard Ballast	$6x10^3$
NO	1HP, 125VAC	$100x10^3$
NO [2]	40A, 277VAC, Resistive	$6x10^3$
NO [2]	TV8, 240VAC	$25x10^3$
NC	15A, 240VAC, General Purpose	$100x10^3$
NC	20A, 250VAC, Resistive (CO type only)	$20x10^3$
NC	30A LRA / 12A FLA, 250VAC, Definite Purpose	$30x10^3$
NC	1HP, 277VAC (CO type only)	$50x10^3$
CO	20A, 250VAC, Resistive	$15x10^3$
CO	20A /10A, 240VAC, Resistive	$100x10^3$
CO	30A / 15A Resistive, 250VAC	$20x10^3$
CO	30A FLA / 80A LRA (N.O.); 12A FLA, 30A LRA (N.C.) 250VAC, Definite Purpose	$30x10^3$
CO	80A LRA / 10A FLA (N.O.); 33A LRA / 10A FLA (N.C.) 250VAC, Definite Purpose	$30x10^3$

IEC 61810-1

Type	Load	Cycles
NO	30A, 250VAC, Resistive, 85°C (PCB)	$75x10^3$
NO	20A, 250VAC, Resistive, 70°C (QC), 85°C (PCB)	$100x10^3$
NO	17A, 250VAC, Resistive, 105°C	$100x10^3$
NO	20A, 250VAC, Resistive, 85°C	$100x10^3$
NO	12A (12A), 250VAC, 60°C (per EN60730-1)	$150x10^3$
NC	10A, 250VAC, Resistive, 60°C (C.O. type only)	$50x10^3$
CO	20A, 250VAC, Resistive, 60°C (N.C.)	$10x10^3$
CO	20A/10A, 250VAC, Resistive, 60°C (N.O.)	$50x10^3$
CO	12A , 250VAC, Resistive, 85°C	$100x10^3$

1) Contact ratings at 40°C (unless otherwise noted) with relay properly vented. **Remove vent nib after soldering and cleaning.**
2) Valid only for mounting and termination code 1.

Mechanical endurance	$10x10^6$ ops.

Coil Data

Coil voltage range	5 to 110VDC
Operative range, IEC 61810	2
Coil insulation system according UL	Class F

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
5	5	3.75	0.5	28	900
9	9	6.75	0.9	90	900
12	12	9	1.2	160	900
15	15	11.25	1.5	249	900
18	18	13.5	1.8	360	900
22	22	16.5	2.2	538	900
24	24	18	2.4	640	900
48	48	36	4.8	2,560	900
110	110	82.5	11	13,444	900

All figures are given for coil without preenergization, at ambient temperature +23°C.

03-2021, Rev. 0321
www.te.com
© 2017 Tyco Electronics Corporation,
a TE Connectivity Ltd. company


Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.


Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

T9G series, DC coil 30A PCB Relay (Continued)

Coil Data (continued)

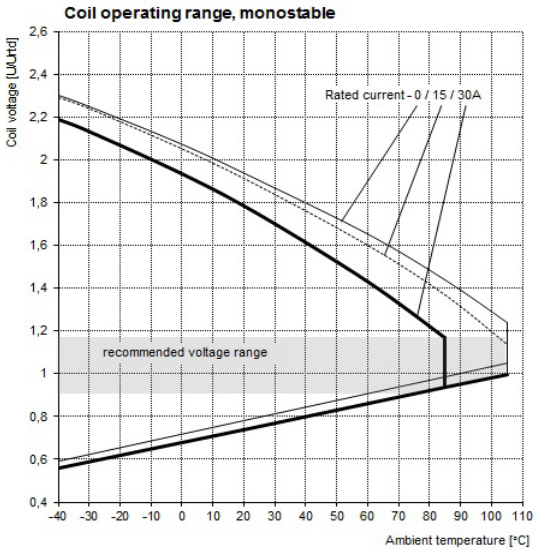

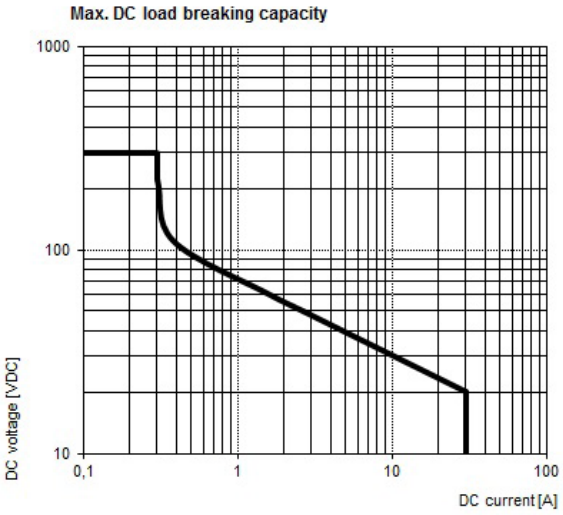


Insulation Data


Initial dielectric strength	
between open contacts	1500V_{rms}
between contact and coil	4000V_{rms}
Initial surge withstand voltage	
between contact and coil	8kV
Initial insulation resistance	
between insulated elements	1x10^{9}Ω, 500VDC
Clearance/creepage	
between contact and coil	>6.4mm / >8mm

Other Data

Material compliance:	EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter
Ambient temperature	
DC coil	Operating -40 to + 105°C at reduced current
Category of environmental protection	
IEC 61810	RTII - flux proof RTIII - wash tight
Vibration resistance (functional)	Opening NO contact >10g Opening NC contact >7g
Shock resistance (functional)	10g for 11msec
Shock resistance (destructive)	100g
Terminal type	pcb-tht and pcb-tht + quick connect
Weight	18g mounting code 1 23g mounting code 2
Resistance to soldering heat THT	
IEC 60068-2-20	260°C/5s
Packaging/unit	10/tube, 420/box (PCB + QC), 500/box (PCB)

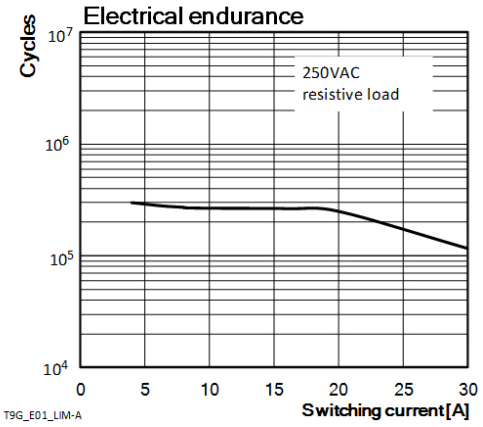


PCB layout
Bottom view on pins
T9G - Mounting and termination code 1



Only necessary terminals are present on single throw models. Consequently, some holes will be unnecessary for single throw models.

T9G - Mounting and termination code 2



Only necessary terminals are present on single throw models. Consequently, some holes will be unnecessary for single throw models.

03-2021, Rev. 0321
www.te.com
© 2017 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.


Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.


T9G series, DC coil 30A PCB Relay (Continued)

Dimensions


Mounting and termination code 1

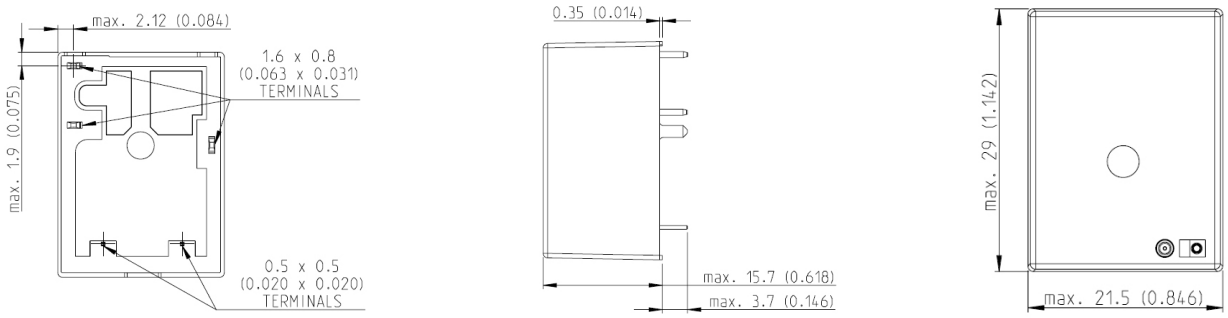

Mounting and termination code 2

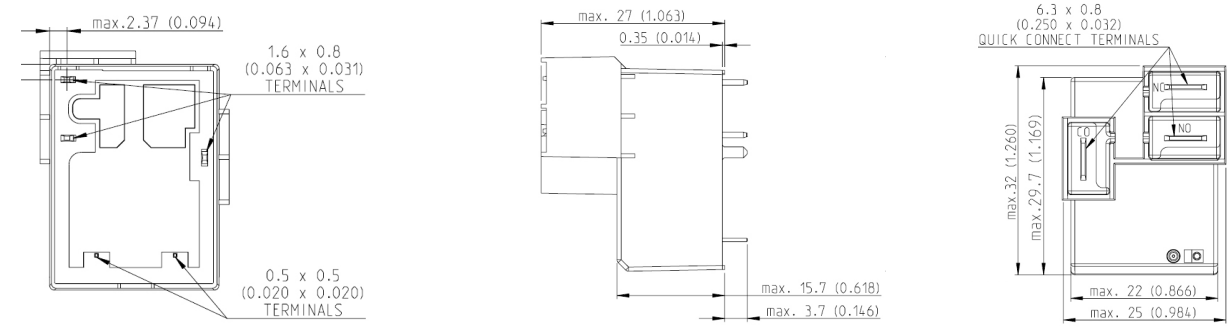

1 Form C (CO) 1 Form A (NO) 1 Form B (NC)

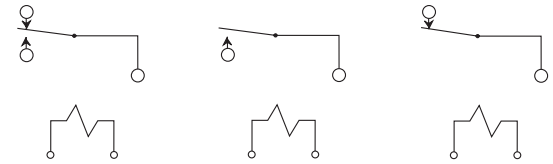

Product code structure Typical product code **T9G S 5 L 2 4 -12**

Type
T9G Power PCB or panel mount relay T9G

Enclosure
S Wash-tight plastic case with knock off nib (requires mounting code 1 or 2)
V Flux-proof plastic case (requires mounting code 1 or 2)

Contact arrangement
1 1 form A (1 NO) **2** 1 form B (1 NC) **5** 1 form C (1 CO)

Coil Input
L DC voltage, 900mW

Mounting and termination
1 PCB mounting; PCB terminals for coil and contacts
2 PCB mounting; PCB term. for coil and contacts; 6.35mm (.250in) quick connect for contacts

Contact material
4 AgSnO (RoHS compliant)

Coil voltage
Coil code: please refer to coil versions table

Version
Blank Standard Version
WG Product in accordance with IEC 60335-1 (domestic appliances)

03-2021, Rev. 0321
www.te.com
© 2017 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

T9G series, DC coil 30A PCB Relay (Continued)

Product Code	Enclosure	Contacts	Mounting	Contact Material	Coil	Part Number
T9GV5L14-5	Flux-proof plastic case (requires mounting code 1 or 2)	1 CO	pcb terminals	AgSnO	5VDC	1558660-1
T9GV5L14-9					9VDC	1558660-2
T9GV5L14-12					12VDC	1558660-3
T9GV5L14-12WG					12VDC	1-1558660-3
T9GV5L14-15					15VDC	1558660-4
T9GV5L14-18					18VDC	1558660-5
T9GV5L14-22					22VDC	1558660-6
T9GV5L14-24					24VDC	1558660-7
T9GV5L14-24WG					24VDC	1-1558660-7
T9GV5L14-48					48VDC	1558660-8
T9GV5L14-110					110VDC	1558660-9
T9GV1L14-5		1 NO			5VDC	1558661-1
T9GV1L14-9					9VDC	1558661-2
T9GV1L14-12					12VDC	1558661-3
T9GV1L14-12WG					12VDC	1-1558661-3
T9GV1L14-15					15VDC	1558661-4
T9GV1L14-18					18VDC	1558661-5
T9GV1L14-22					22VDC	1558661-6
T9GV1L14-24					24VDC	1558661-7
T9GV1L14-24WG					24VDC	1-1558661-7
T9GV1L14-48					48VDC	1558661-8
T9GV1L14-110					110VDC	1558661-9
T9GV1L24-12WG					12VDC	1-1558671-3
T9GV1L24-24WG					24VDC	1-1558671-7
T9GV2L14-5		1 NC			5VDC	1558662-1
T9GV2L14-9					9VDC	1558662-2
T9GV2L14-12					12VDC	1558662-3
T9GV2L14-12WG					12VDC	1-1558662-3
T9GV2L14-15					15VDC	1558662-4
T9GV2L14-18					18VDC	1558662-5
T9GV2L14-22					22VDC	1558662-6
T9GV2L14-24					24VDC	1558662-7
T9GV2L14-24WG					24VDC	1-1558662-7
T9GV2L14-48					48VDC	1558662-8
T9GV2L14-110					110VDC	1558662-9
T9GV2L24-12WG					12VDC	1-1558672-3
T9GV2L24-24WG					24VDC	1-1558672-7
T9GV5L24-5		1 CO	pcb + QC	AgSnO	5VDC	1558670-1
T9GV5L24-9					9VDC	1558670-2
T9GV5L24-12					12VDC	1558670-3
T9GV5L24-12WG					12VDC	1-1558670-3
T9GV5L24-15					15VDC	1558670-4
T9GV5L24-18					18VDC	1558670-5
T9GV5L24-22					22VDC	1558670-6
T9GV5L24-24WG					24VDC	1-1558670-7
T9GV2L24-24		1 NC			24VDC	1558672-7
T9GV2L24-48					48VDC	1558672-8
T9GV2L24-110					110VDC	1558672-9

03-2021, Rev. 0321
www.te.com
© 2017 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

T9G series, DC coil 30A PCB Relay (Continued)

Product Code	Enclosure	Contacts	mounting	Contact Material	Coil	Part Number
T9GS5L14-5	Wash-tight plastic case with knock off nib (requires mounting code 1 or 2)	1 CO	pcb terminals	AgSnO	5VDC	1558665-1
T9GS5L14-9					9VDC	1558665-2
T9GS5L14-12					12VDC	1558665-3
T9GS5L14-15					15VDC	1558665-4
T9GS5L14-18					18VDC	1558665-5
T9GS5L14-22					22VDC	1558665-6
T9GS5L14-24					24VDC	1558665-7
T9GS5L14-48					48VDC	1558665-8
T9GS5L14-110					110VDC	1558665-9
T9GS1L14-5		1 NO			5VDC	1558666-1
T9GS1L14-9					9VDC	1558666-2
T9GS1L14-12					12VDC	1558666-3
T9GS1L14-15					15VDC	1558666-4
T9GS1L14-18					18VDC	1558666-5
T9GS1L14-22					22VDC	1558666-6
T9GS1L14-24					24VDC	1558666-7
T9GS1L14-48					48VDC	1558666-8
T9GS1L14-110					110VDC	1558666-9
T9GS2L14-5		1 NC			5VDC	1558667-1
T9GS2L14-9					9VDC	1558667-2
T9GS2L14-12					12VDC	1558667-3
T9GS2L14-15					15VDC	1558667-4
T9GS2L14-18					18VDC	1558667-5
T9GS2L14-22					22VDC	1558667-6
T9GS2L14-24					24VDC	1558667-7
T9GS2L14-48					48VDC	1558667-8
T9GS2L14-110					110VDC	1558667-9
T9GS5L24-5		1 CO	pcb + QC	AgSnO	5VDC	1558675-1
T9GS5L24-9					9VDC	1558675-2
T9GS5L24-12					12VDC	1558675-3
T9GS5L24-15					15VDC	1558675-4
T9GS5L24-18					18VDC	1558675-5
T9GS5L24-22					22VDC	1558675-6
T9GS5L24-24					24VDC	1558675-7
T9GS5L24-48					48VDC	1558675-8
T9GS5L24-110					110VDC	1558675-9
T9GS1L24-5		1 NO			5VDC	1558676-1
T9GS1L24-9					9VDC	1558676-2
T9GS1L24-12					12VDC	1558676-3
T9GS1L24-15					15VDC	1558676-4
T9GS1L24-18					18VDC	1558676-5
T9GS1L24-22					22VDC	1558676-6
T9GS1L24-24					24VDC	1558676-7
T9GS1L24-48					48VDC	1558676-8
T9GS1L24-110					110VDC	1558676-9
T9GS2L24-5		1 NC			5VDC	1558677-1
T9GS2L24-9					9VDC	1558677-2
T9GS2L24-12					12VDC	1558677-3
T9GS2L24-15					15VDC	1558677-4
T9GS2L24-18					18VDC	1558677-5
T9GS2L24-22					22VDC	1558677-6
T9GS2L24-24					24VDC	1558677-7
T9GS2L24-48					48VDC	1558677-8
T9GS2L24-110					110VDC	1558677-9

Note. This list represents the most common types and does not show all variants covered by this datasheet. Other types on request.

03-2021, Rev. 0321
www.te.com
© 2017 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.