
DR 45 N

Art. No. 6060 – 8 Ω



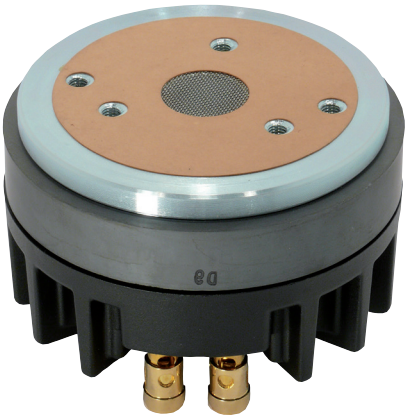

High-End

Professioneller 1“-Treiber mit Titankalotte, der zusammen mit dem Exponentialhorn M 300 im Mitteltonbereich ab 800 Hz einsetzbar ist. Die 40-mm-Schwingspule und das wuchtige Magnetsystem garantieren dieser Treiber-Horn-Kombination die für den Profibereich geforderte Verbindung von enormer Belastbarkeit bei extrem hohem Wirkungsgrad. Der sehr lineare Frequenzgang dieser Treiber-Horn-Kombination bietet auch vielfältige Einsatzmöglichkeiten im High-End-Bereich.


Bestückung: MONITOR 890 MK III, PA 110 H.


Zubehör: M 300 (Art. No. 6056), AD 25 H (Art. No. 6057), HT 21 (Art No. 6021)


Professional 1“ driver *with titanium dome, in conjunction with the exponential horn system M 300, as midrange driver above 800 Hz. The 40 mm aluminium-voice-coil and the heavy duty magnet drive are making this system suitable for professional horn-driver units with the required high efficiency and high power handling. The very linear frequency response of this horn-driver unit is also matching the demands of highly professional high end applications.*

Applied to: *MONITOR 890 MK III, PA 110 H.*

Accessories: *M 300 (Art. No. 6056, AD 25 H (Art. No. 6057), HT 21 (Art No. 6021)*

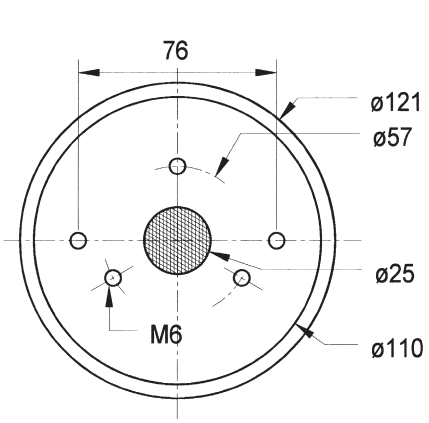

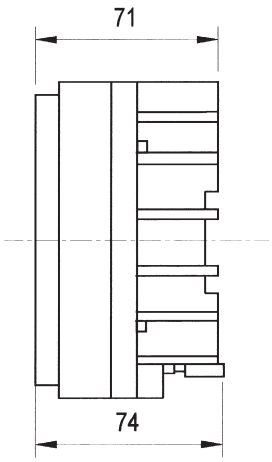

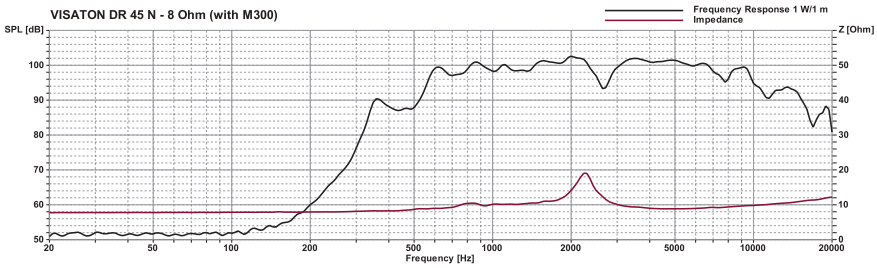

Technische Daten / *Technical Data*	
Nennbelastbarkeit *Rated power*	100[1] W
Impedanz *Impedance*	8 Ω
Übertragungsbereich (–10 dB) *Frequency response (–10 dB)*	500–12000 Hz
Mittlerer Schalldruckpegel *Mean sound pressure level*	102 dB (1 W/1 m)
Resonanzfrequenz *Resonant frequency*	600 Hz
Schwingspulendurchmesser *Voice coil diameter*	40 mm Ø
Anschluss *Terminal*	Federklemmen *Spring terminals*
Gewicht netto *Net weight*	2,8 kg

[1] über Frequenzweiche 12 dB/Okt. ab mind. 1000 Hz /
via crossover network 12 dB/Oct. as of 1000 Hz