# 10 pA, Ultra Low Leakage and Quiescent Current, Load Switch with Reverse Blocking

## DESCRIPTION

The SiP32431 and SiP32432 are ultra low leakage and quiescent current slew rate controlled high side switches with reverse blocking capability. The switches are of a low on resistance p-channel MOSFET that supports continuous current up to 1.4 A.

The SiP32431 and SiP32432 operate with an input voltage from 1.5 V to 5.5 V.

The SiP32431 and SiP32432 feature low input logic level to interface with low control voltage from microprocessors. The SiP32431 is of logic high enable control, while SiP32432 is of logic low enable control. Both devices have a very low operating current, typically 10 pA at 3.3 V power supply.

The SiP32431 and SiP32432 are available in lead (Pb)-free package options including 6 pin SC-70-6, and 4 pin TDFN4 1.2 mm x 1.6 mm DFN4 packages. The operation temperature range is specified from -40 °C to +85 °C.

The SiP32431 and SiP32432 compact package options, operation voltage range, and low operating current make it a good fit for battery power applications.

## FEATURES

- 1.5 V to 5.5 V input voltage range
- No bias power rail required
- Low on-resistance $R_{DS(on)}$, typically 105 mΩ at 5 V and 135 mΩ at 3 V for TDFN4 1.2 mm x 1.6 mm package
- Typical 147 mΩ at 5 V and 178 mΩ at 3 V for SC-70-6 package
- Slew rate controlled turn-on time: 100 µs
- Ultra low leakage and quiescent current:
  - $V_{IN}$ quiescent current = 0.01 nA
  - $V_{IN}$ shutdown leakage = 0.20 nA
- Reverse blocking capability
- SC-70-6 and TDFN4 1.2 mm x 1.6 mm packages
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free
RoHS COMPLIANT
HALOGEN FREE Available

## APPLICATIONS

- Wireless sensor network
- Smart meters
- Wearable
- Internet of things
- Portable medical devices
- Security systems
- Battery powered devices
- Portable Instruments

## TYPICAL APPLICATION CIRCUIT

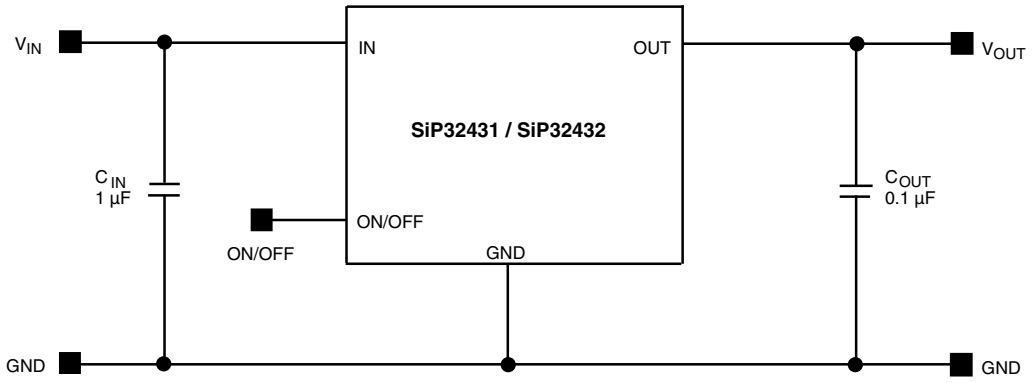



**Fig. 1 - SiP32431, SiP32432 Typical Application Circuit**

## ORDERING INFORMATION

| PART NUMBER | MARKING | ENABLE | PACKAGE | TEMPERATURE RANGE |
|---|---|---|---|---|
| SiP32431DR3-T1GE3 | MAxx | High enable | SC-70-6 | -40 °C to +85 °C |
| SiP32432DR3-T1GE3 | MDxx | Low enable | | |
| SiP32431DNP3-T1GE4 | Dx | High enable | TDFN4 1.2 mm x 1.6 mm | |
| SiP32432DNP3-T1GE4 | Vx | Low enable | | |

**Notes**

- x = lot code


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

- -GE3 denotes halogen-free and RoHS-compliant
- Please use the SiP32431DR3-T1GE3 to replace SiP32431DR3-T1-E3

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER | | LIMIT | UNIT |
|---|---|---|---|
| Supply input voltage ($V_{IN}$) | | -0.3 to +6 | V |
| Enable input voltage ($V_{ON/OFF}$) | | -0.3 to +6 | |
| Output voltage ($V_{OUT}$) | | -0.3 to +6 | |
| Maximum continuous switch current ($I_{max.}$) | SC-70-6 package | 1.2 | A |
| | TDFN4 1.2 mm x 1.6 mm | 1.4 | |
| Maximum pulsed current ($I_{DM}$) $V_{IN}$ (pulsed at 1 ms, 10 % duty cycle) | $V_{IN} \geq 2.5$ V | 3 | |
| | $V_{IN} < 2.5$ V | 1.6 | |
| ESD rating (HBM) | | 4000 | V |
| Junction temperature ($T_J$) | | -40 to +125 | °C |
| Thermal resistance ($\theta_{JA}$) [a] | 6 pin SC-70-6 [b] | 220 | °C/W |
| | 4 pin TDFN4 1.2 mm x 1.6 mm [c] | 170 | |
| Power dissipation ($P_D$) [a] | 6 pin SC-70- 6 [b] | 250 | mW |
| | 4 pin TDFN4 1.2 mm x 1.6 mm [c] | 324 | |

**Notes**

a. Device mounted with all leads and power pad soldered or welded to PC board
b. Derate 4.5 mW/°C above $T_A$ = 70 °C
c. Derate 5.9 mW/°C above $T_A$ = 70 °C, see PCB layout

*Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating / conditions for extended periods may affect device reliability.*

## RECOMMENDED OPERATING RANGE

| PARAMETER | LIMIT | UNIT |
|---|---|---|
| Input voltage range ($V_{IN}$) | 1.5 to 5.5 | V |
| Operating temperature range | -40 to +85 | °C |


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## SPECIFICATIONS

| PARAMETER | SYMBOL | TEST CONDITIONS UNLESS SPECIFIED $V_{IN}$ = 5, $T_A$ = -40 °C to +85 °C (Typical values are at $T_A$ = 25 °C) | | LIMITS -40 °C to +85 °C MIN. [a] | TYP. [b] | MAX. [a] | UNIT |
|---|---|---|---|---|---|---|---|
| Operating voltage [c] | $V_{IN}$ | | | 1.5 | - | 5.5 | V |
| Quiescent current | $I_Q$ | $V_{IN}$ = 3.3 V, $V_{on/off}$ = 3.3 V | | - | 0.01 | 100 | nA |
| | | $V_{IN}$ = 5 V, $V_{on/off}$ = 5 V | | - | 0.05 | 1000 | |
| Off supply current | $I_{Q(off)}$ | $V_{IN}$ = 3.3 V, $V_{on/off}$ = 0 V, OUT = open | | - | 0.01 | 100 | |
| | | $V_{IN}$ = 5 V, $V_{on/off}$ = 0 V, OUT = open | | - | - | 1000 | |
| Off switch current | $I_{SD(off)}$ | $V_{IN}$ = 3.3 V, $V_{on/off}$ = 0 V, OUT = 1 V | | - | 0.2 | 100 | |
| | | $V_{IN}$ = 5 V, $V_{on/off}$ = 0 V, OUT = 0 V | | - | - | 1000 | |
| Reverse blocking current | $I_{RB}$ | $V_{OUT}$ = 5.5 V, $V_{IN}$ = 0, $V_{on/off}$ = inactive | | - | 130 | 1000 | |
| On-resistance | $R_{DS(on)}$ | $V_{IN}$ = 5 V, $I_L$ = 500 mA, $T_A$ = 25 °C | SC-70-6 | - | 147 | 230 | mΩ |
| | | | TDFN4 | - | 105 | | |
| | | $V_{IN}$ = 4.2 V, $I_L$ = 500 mA, $T_A$ = 25 °C | SC-70-6 | - | 155 | 250 | |
| | | | TDFN4 | - | 110 | | |
| | | $V_{IN}$ = 3 V, $I_L$ = 500 mA, $T_A$ = 25 °C | SC-70-6 | - | 178 | 290 | |
| | | | TDFN4 | - | 135 | | |
| | | $V_{IN}$ = 1.8 V, $I_L$ = 500 mA, $T_A$ = 25 °C | SC-70-6 | - | 275 | 480 | |
| | | | TDFN4 | - | 230 | | |
| | | $V_{IN}$ = 1.5 V, $I_L$ = 500 mA, $T_A$ = 25 °C | SC-70-6 | - | 395 | 520 | |
| | | | TDFN4 | - | 350 | | |
| On-resistance temp.-coefficient | $TD_{RDS}$ | | | - | 2800 | - | ppm/°C |
| On / off input low voltage [c] | $V_{IL}$ | $V_{IN}$ ≥ 1.5 V to < 1.8 V | | - | - | 0.3 | V |
| | | $V_{IN}$ ≥ 1.8 V to < 2.7 V | | - | - | 0.4 | |
| | | $V_{IN}$ ≥ 2.7 V to ≤ 5.5 V | | - | - | 0.6 | |
| On / off input low voltage c | $V_{IH}$ | $V_{IN}$ ≥ 1.5 V to < 2.7 V | | 1.3 | - | - | |
| | | $V_{IN}$ ≥ 2.7 V to < 4.2 V | | 1.5 | - | - | |
| | | $V_{IN}$ ≥ 4.2 V to ≤ 5.5 V | | 1.8 | - | - | |
| On / off input leakage | $I_{ON/OFF}$ | $V_{on/off}$ = 3.3 V | | - | 0.014 | 100 | nA |
| | | $V_{on/off}$ = 5.5 V | | - | 0.042 | 1000 | |
| Output turn-on delay time | $t_{d(on)}$ | $V_{IN}$ = 5 V, $R_{load}$ = 10 Ω, $T_A$ = 25 °C | | - | 20 | 40 | µs |
| Output turn-on rise time | $t_{(on)}$ | | | - | 140 | 180 | |
| Output turn-off delay time | $t_{d(off)}$ | | | - | 4 | 10 | |

**Notes**

a. The algebriac convention whereby the most negative value is a minimum and the most positive a maximum
b. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing
c. For $V_{IN}$ outside this range consult typical on / off threshold curve

## PIN CONFIGURATION





**Fig. 2 - SC-70-6 Package**





**Fig. 3 - TDFN4 1.2 mm x 1.6 mm Package**

## PIN DESCRIPTION

| PIN NUMBER SC-70-6 | PIN NUMBER TDFN4 | NAME | FUNCTION |
|---|---|---|---|
| 4 | 3 | IN | This pin is the p-channel MOSFET source connection. Bypass to ground through a 1 µF capacitor |


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

| PIN DESCRIPTION | | | |
|---|---|---|---|
| PIN NUMBER | | NAME | FUNCTION |
| SC-70-6 | TDFN4 | | |
| 2, 5 | 2 | GND | Ground connection |
| 3 | 4 | ON / OFF | Enable input |
| 1 | 1 | OUT | This pin is the p-channel MOSFET drain connection. Bypass to ground through a 0.1 µF capacitor |


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

**TYPICAL CHARACTERISTICS** (internally regulated, 25 °C, unless otherwise noted)

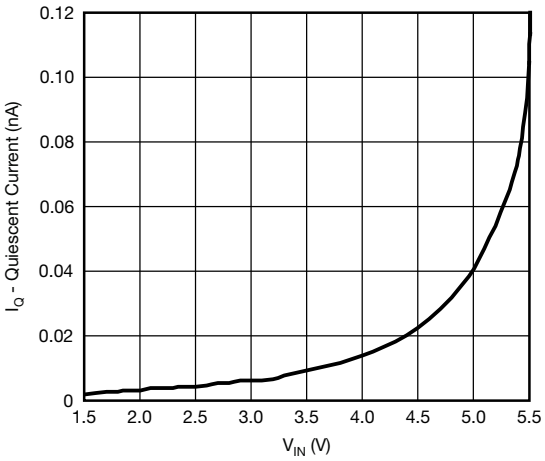



**Fig. 4 - Quiescent Current vs. Input Voltage**

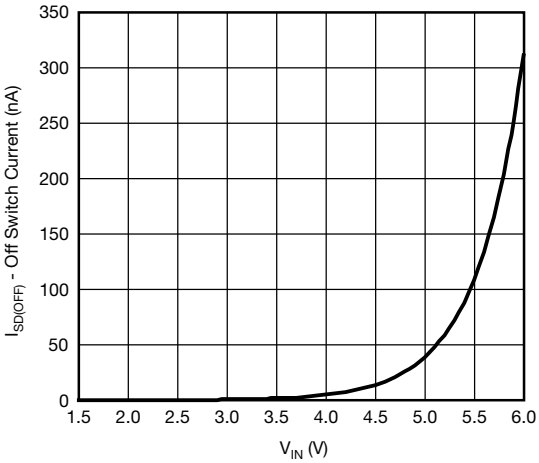



**Fig. 5 - Off Switch Current vs. Input Voltage**

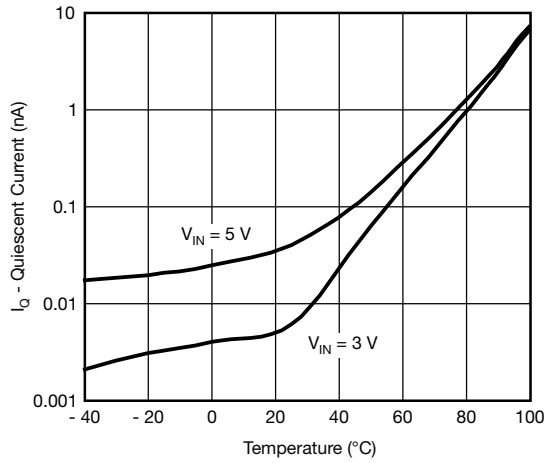



**Fig. 6 - Quiescent Current vs. Temperature**

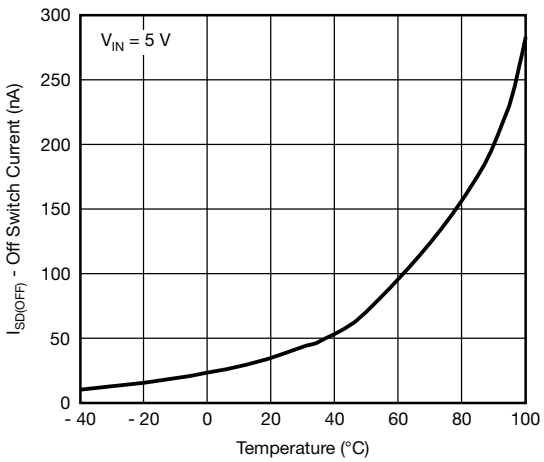



**Fig. 7 - Off Switch Current vs. Temperature**

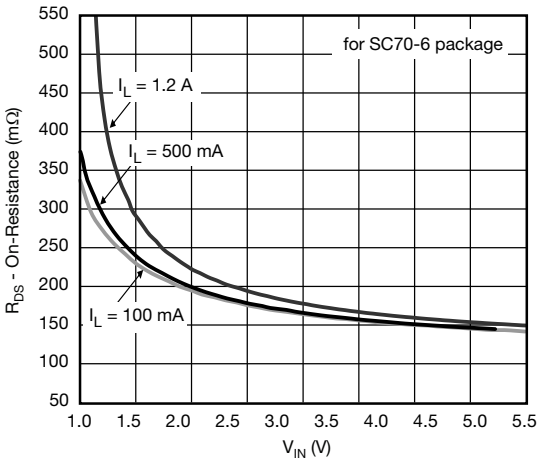



**Fig. 8 - $R_{DS(on)}$ vs. $V_{IN}$ for SC-70-6 Package**

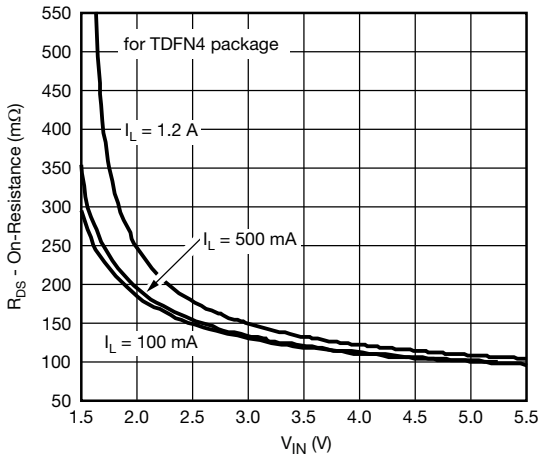



**Fig. 9 - $R_{DS(on)}$ vs. Input Voltage**


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

**TYPICAL CHARACTERISTICS** (internally regulated, 25 °C, unless otherwise noted)

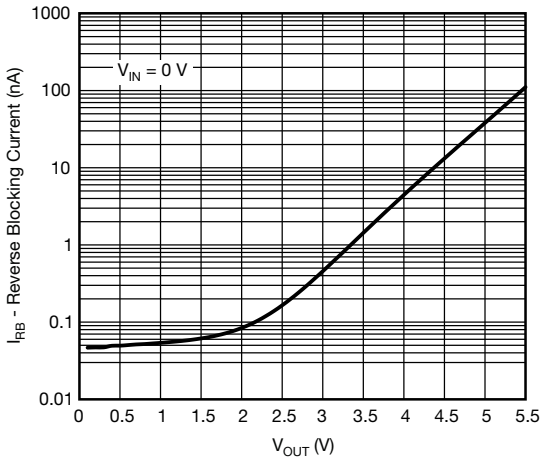



**Fig. 10 - Reverse Blocking Current vs. $V_{OUT}$**

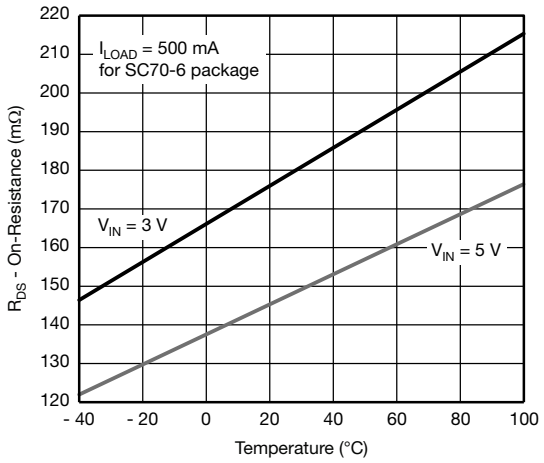



**Fig. 11 - $R_{DS(on)}$ vs. Temperature**

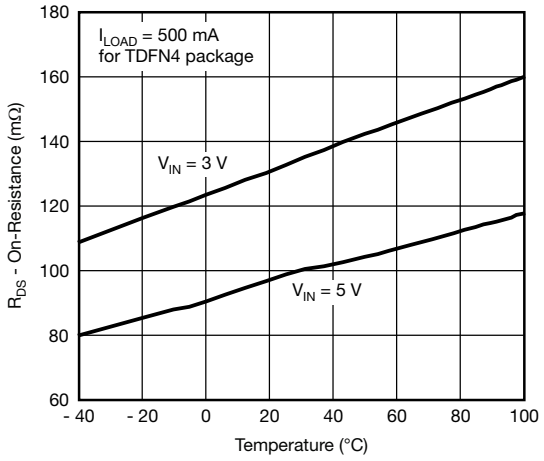



**Fig. 12 - $R_{DS(on)}$ vs. Temperature**

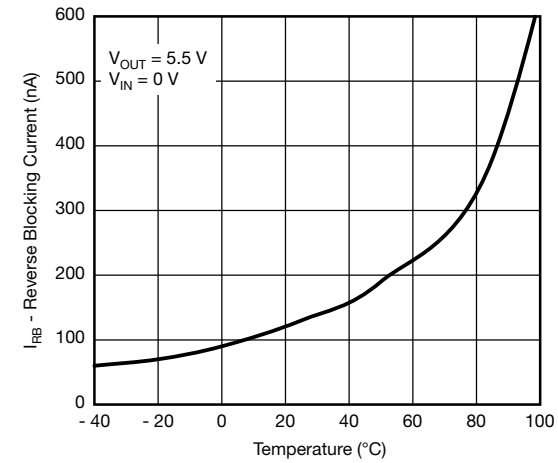



**Fig. 13 - Reverse Blocking Current vs. Temperature**

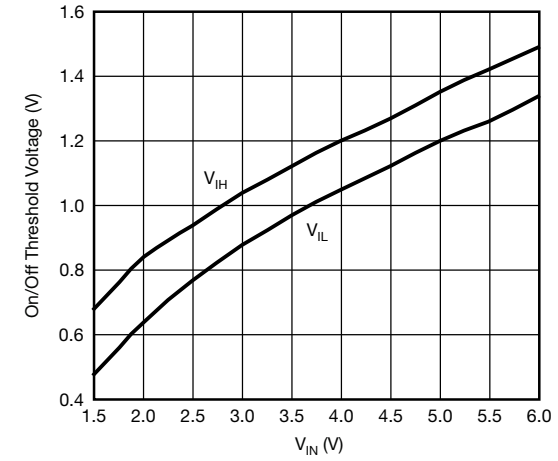



**Fig. 14 - On / Off Threshold vs. Input Voltage**

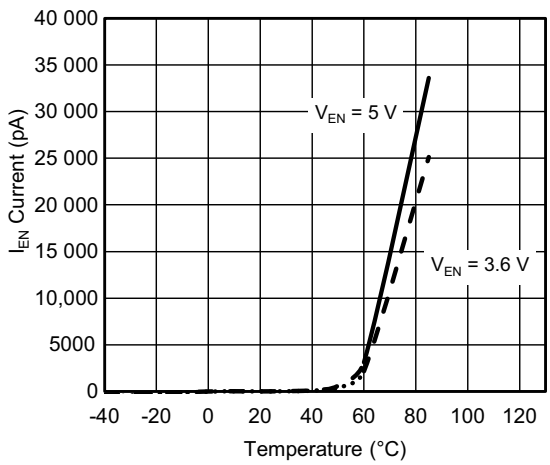



**Fig. 15 - $I_{EN}$ Current vs. Temperature**


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## TYPICAL WAVEFORMS

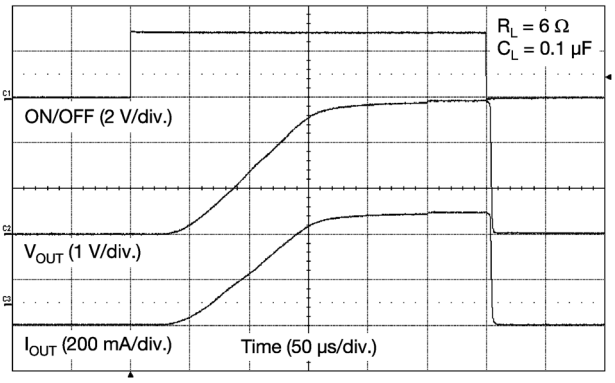



**Fig. 16 - Switching ($V_{IN}$ = 3 V)**

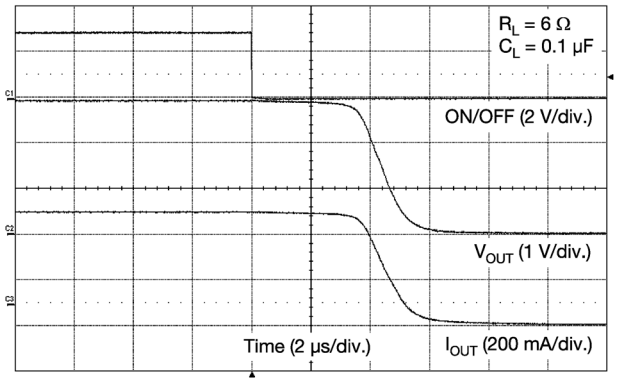



**Fig. 18 - Turn-Off ($V_{IN}$ = 3 V)**

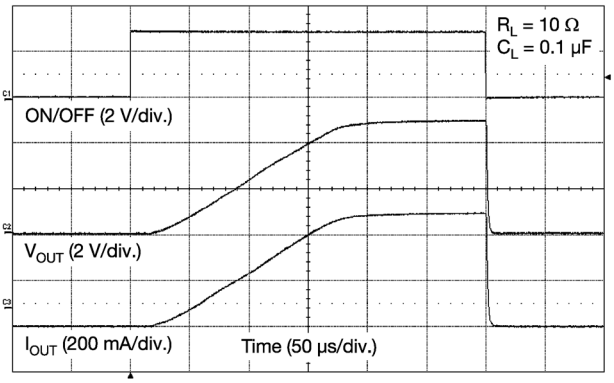



**Fig. 17 - Switching ($V_{IN}$ = 5 V)**

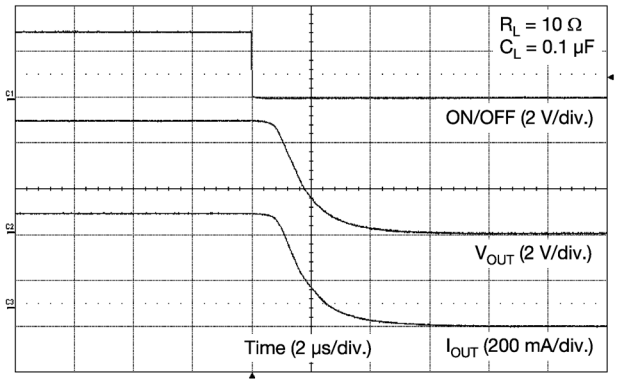



**Fig. 19 - Turn-Off ($V_{IN}$ = 5 V)**

## BLOCK DIAGRAM

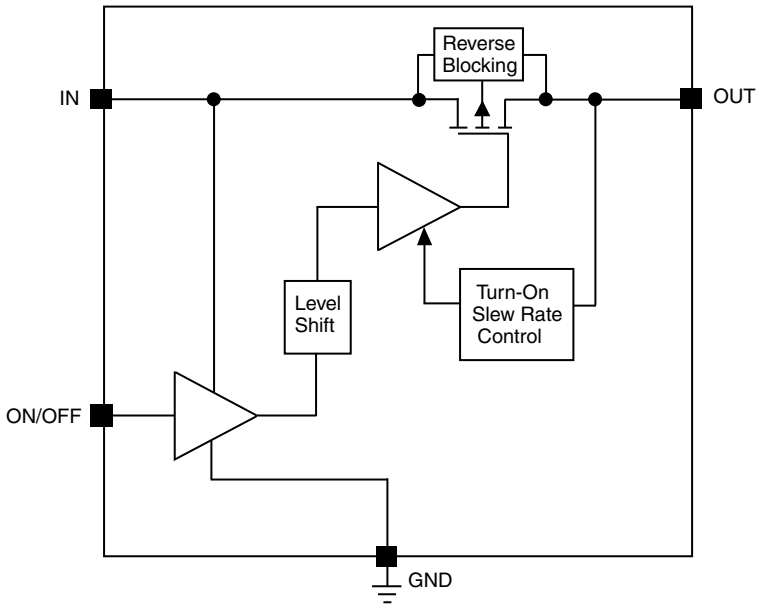



**Fig. 20 - Functional Block Diagram**


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## PCB LAYOUT

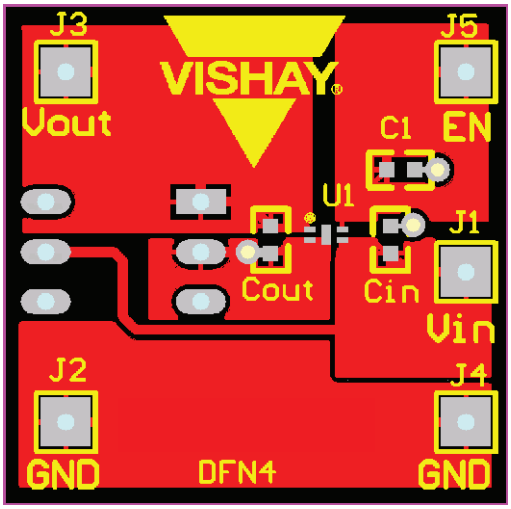



Fig. 21 - Top, TDFN4 1.2 mm x 1.6 mm PCB Layout

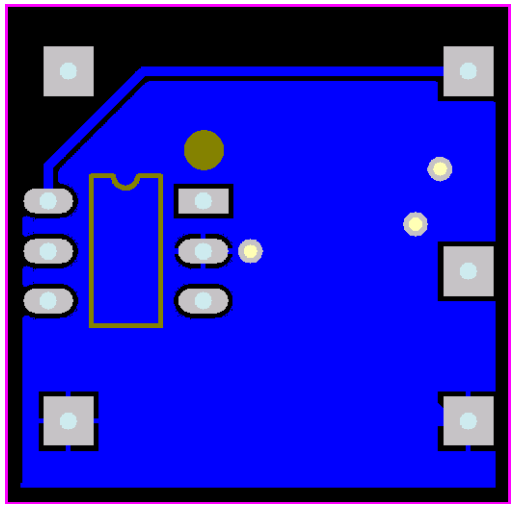


Fig. 22 - Bottom, TDFN4 1.2 mm x 1.6 mm PCB Layout

## DETAILED DESCRIPTION

The SiP32431 and SiP32432 are p-channel MOSFET power switches designed for high-side slew rate controlled load-switching applications. Once turned on, the slew-rate control circuitry is activated and current is ramped in a linear fashion until it reaches the level required for the output load condition. This is accomplished by first elevating the gate voltage of the MOSFET up to its threshold voltage and then by linearly increasing the gate voltage until the MOSFET becomes fully enhanced. At this point, the gate voltage is then quickly increased to the full input voltage to reduce $R_{DS(on)}$ of the MOSFET switch and minimize any associated power losses.

## APPLICATION INFORMATION

### Input Capacitor

While a bypass capacitor on the input is not required, a 1 µF or larger capacitor for $C_{IN}$ is recommended in almost all applications. The bypass capacitor should be placed as physically close as possible to the input pin to be effective in minimizing transients on the input. Ceramic capacitors are recommended over tantalum because of their ability to withstand input current surges from low impedance sources such as batteries in portable devices.

### Output Capacitor

A 0.1 µF capacitor or larger across $V_{OUT}$ and GND is recommended to insure proper slew operation. $C_{OUT}$ may be increased without limit to accommodate any load transient condition with only minimal affect on the SiP32431 and SiP32432 turn on slew rate time. There are no ESR or capacitor type requirement.

### Enable

The on / off pin is compatible with both TTL and CMOS logic voltage levels.

### Protection Against Reverse Voltage Condition

The SiP32431 and SiP32432 contain a body snatcher that normally connects the body to the source (IN) when the device is enabled. In case where the device is disabled but the $V_{OUT}$ is higher than the $V_{IN}$, the n-type body is switched to out, reverse bias the body diode to prevent the current from going back to the input.

### Thermal Considerations

The physical limitations of the layout and assembly of the device limit the maximum current levels as stated in the Absolute Maximum Ratings table. However, another limiting characteristic for the safe operating load current is the thermal power dissipation of the package. To obtain the highest power dissipation, the power pad of the TDFN4 package should be connected to a heat sink on the printed circuit board.

The maximum power dissipation in any application is dependent on the maximum junction temperature, $T_{J\,(max.)} = 125\,°C$, the junction-to-ambient thermal resistance for the TDFN4 1.2 mm x 1.6 mm package, $\theta_{J\text{-}A} = 170\,°C/W$, and the ambient temperature, $T_A$, which may be formulaically expressed as:

$$P\,(max.) = \frac{T_{J\,(max.)} - T_A}{\theta_{J-A}} = \frac{125 - T_A}{170}$$

It then follows that, assuming an ambient temperature of 70 °C, the maximum power dissipation will be limited to about 324 mW.

So long as the load current is below the absolute maximum limits, the maximum continuous switch current becomes a function two things: the package power dissipation and the $R_{DS(on)}$ at the ambient temperature.

As an example let us calculate the worst case maximum load current at $T_A = 70\,°C$. The worst case $R_{DS(on)}$ at 25 °C


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

occurs at an input voltage of 1.5 V and is equal to 520 mΩ. The $R_{DS(on)}$ at 70 °C can be extrapolated from this data using the following formula

$R_{DS(on)}$ (at 70 °C) = $R_{DS(on)}$ (at 25 °C) x (1 + $T_C$ x ΔT)

Where $T_C$ is 3300 ppm/°C. Continuing with the calculation we have

$R_{DS(on)}$ (at 70 °C) = 520 mΩ x (1 + 0.0033 x (70 °C - 25 °C)) = 597 mΩ

The maximum current limit is then determined by

$$I_{LOAD\ (max.)} < \sqrt{\frac{P\ (max.)}{R_{DS(on)}}}$$

which in case is 0.74 A. Under the stated input voltage condition, if the 0.74 A current limit is exceeded the internal die temperature will rise and eventually, possibly damage the device.



For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

| PRODUCT SUMMARY | | | | |
|---|---|---|---|---|
| Part number | SiP32431DN | SiP32431DR | SiP32432DN | SiP32432DR |
| Description | 1.5 V to 5.5 V, 105 mΩ, 10 pA $I_Q$, bidirectional off isolation, EN active high | 1.5 V to 5.5 V, 147 mΩ, 10 pA $I_Q$, bidirectional off isolation, EN active high | 1.5 V to 5.5 V, 105 mΩ, 10 pA $I_Q$, bidirectional off isolation, EN active low | 1.5 V to 5.5 V, 147 mΩ, 10 pA $I_Q$, bidirectional off isolation, EN active low |
| Configuration | Single | Single | Single | Single |
| Slew rate time (µs) | 140 | 140 | 140 | 140 |
| On delay time (µs) | 20 | 20 | 20 | 20 |
| Input voltage min. (V) | 1.5 | 1.5 | 1.5 | 1.5 |
| Input voltage max. (V) | 5.5 | 5.5 | 5.5 | 5.5 |
| On-resistance at input voltage min. (mΩ) | 350 | 395 | 350 | 395 |
| On-resistance at input voltage max. (mΩ) | 105 | 147 | 105 | 147 |
| Quiescent current at input voltage min. (µA) | 0.000002 | 0.000002 | 0.000002 | 0.000002 |
| Quiescent current at input voltage max. (µA) | 0.00004 | 0.00004 | 0.00004 | 0.00004 |
| Output discharge (yes / no) | No | No | No | No |
| Reverse blocking (yes / no) | Yes | Yes | Yes | Yes |
| Continuous current (A) | 1.4 | 1.4 | 1.4 | 1.4 |
| Package type | TDFN4 | SC-70-6 | TDFN4 | SC-70-6 |
| Package size (W, L, H) (mm) | 1.2 x 1.6 x 0.5 | 2.0 x 2.0 x 0.5 | 1.2 x 1.6 x 0.5 | 2.0 x 2.0 x 0.5 |
| Status code | 2 | 2 | 2 | 2 |
| Product type | Slew rate | Slew rate | Slew rate | Slew rate |
| Applications | Computers, consumer, industrial, healthcare, networking, portable | Computers, consumer, industrial, healthcare, networking, portable | Computers, consumer, industrial, healthcare, networking, portable | Computers, consumer, industrial, healthcare, networking, portable |


*Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?66597.*


For technical questions, contact: powerictechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


# TDFN4 1.2 x 1.6 Case Outline

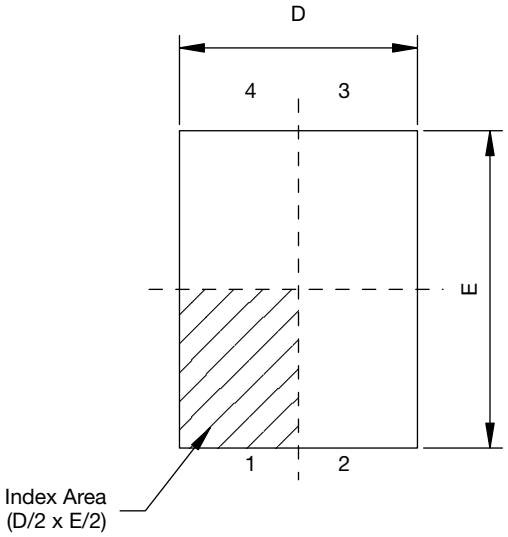


Top View

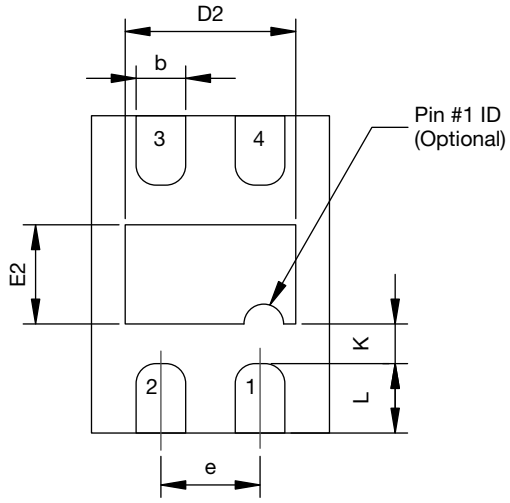


Bottom View

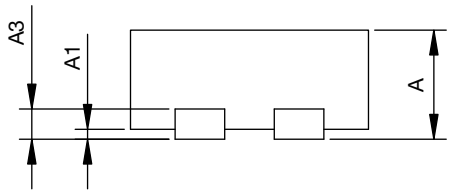


Side View

| DIM. | MILLIMETERS | | | INCHES | | |
|---|---|---|---|---|---|---|
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| A | 0.45 | 0.55 | 0.60 | 0.017 | 0.022 | 0.024 |
| A1 | 0.00 | - | 0.05 | 0.00 | - | 0.002 |
| A3 | 0.15 REF. or 0.127 REF. (1) | | | 0.006 or 0.005 (1) | | |
| b | 0.20 | 0.25 | 0.30 | 0.008 | 0.010 | 0.012 |
| D | 1.15 | 1.20 | 1.25 | 0.045 | 0.047 | 0.049 |
| D2 | 0.81 | 0.86 | 0.91 | 0.032 | 0.034 | 0.036 |
| e | 0.50 BSC | | | 0.020 | | |
| E | 1.55 | 1.60 | 1.65 | 0.061 | 0.063 | 0.065 |
| E2 | 0.45 | 0.50 | 0.55 | 0.018 | 0.020 | 0.022 |
| K | 0.25 typ. | | | 0.010 typ. | | |
| L | 0.25 | 0.30 | 0.35 | 0.010 | 0.012 | 0.014 |
| ECN: T16-0143-Rev. C, 18-Apr-16<br>DWG: 5995 | | | | | | |

**Note**


(1) The dimension depends on the leadframe that assembly house used.



For technical questions, contact: powerictechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## SC-70: 3/4/5/6-LEADS (PIC ONLY)

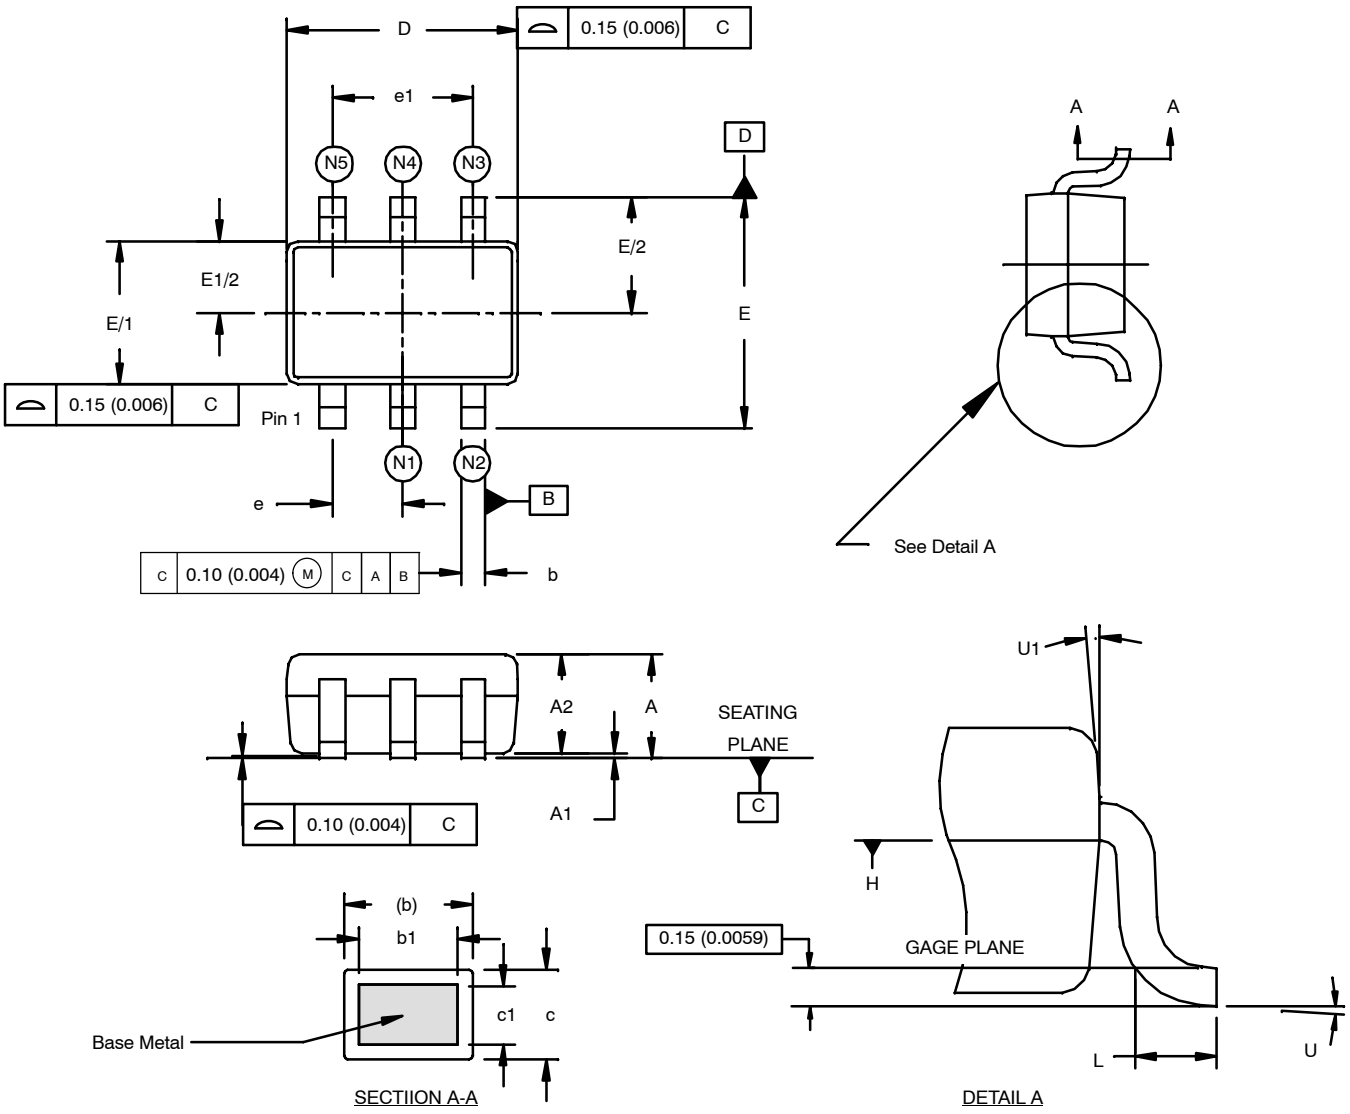


| Pin Code | LEAD COUNT | | | |
|---|---|---|---|---|
| | 3 | 4 | 5 | 6 |
| N1 | – | – | 2 | 2 |
| N2 | 2 | 2 | 3 | 3 |
| N3 | – | 3 | 4 | 4 |
| N4 | 3 | – | – | 5 |
| N5 | – | 4 | 5 | 6 |


NOTES:

1. Dimensioning and tolerancing per ANSI Y14.5M-1994.
2. Controlling dimensions: millimeters converted to inch dimensions are not necessarily exact.
3. Dimension “D” does not include mold flash, protrusion or gate burr. Mold flash, protrusion or gate burr shall not exceed 0.15 mm (0.006 inch) per side.
4. The package top shall be smaller than the package bottom. Dimension “D” and “E1” are determined at the outer most extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs and interlead flash, but including any mismatch between the top and bottom of the plastic body.

| Dim | MILLIMETERS | | | INCHES | | |
|---|---|---|---|---|---|---|
| | Min | Nom | Max | Min | Nom | Max |
| **A** | 0.80 | – | 1.10 | 0.031 | – | 0.043 |
| **A1** | 0.00 | – | 0.10 | 0.000 | – | 0.004 |
| **A2** | 0.80 | 0.90 | 1.00 | 0.031 | 0.035 | 0.040 |
| **b** | 0.15 | – | 0.30 | 0.006 | – | 0.012 |
| **b1** | 0.15 | 0.20 | 0.25 | 0.006 | 0.008 | 0.010 |
| **c** | 0.08 | – | 0.25 | 0.003 | – | 0.010 |
| **c1** | 0.08 | 0.13 | 0.20 | 0.003 | 0.005 | 0.008 |
| **D** | 1.90 | 2.10 | 2.15 | 0.074 | 0.082 | 0.084 |
| **E** | 2.00 | 2.10 | 2.20 | 0.078 | 0.082 | 0.086 |
| **$E_1$** | 1.15 | 1.25 | 1.35 | 0.045 | 0.050 | 0.055 |
| **e** | 0.65 BSC | | | 0.0255 BSC | | |
| **$e_1$** | 1.30 BSC | | | 0.0512 BSC | | |
| **L** | 0.26 | 0.36 | 0.46 | 0.010 | 0.014 | 0.018 |
| **U** | 0° | – | 8° | 0° | – | 8° |
| **U1** | 4° | | 10° | 4° | | 10° |

ECN: S-42145—Rev. A, 22-Nov-04
DWG: 5941

**RECOMMENDED MINIMUM PADS FOR TDFN4 1.2 x 1.6**

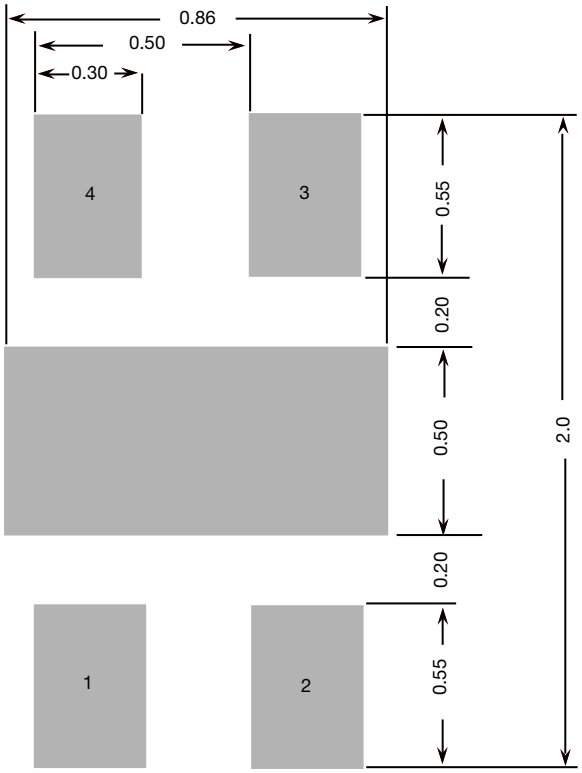


Recommended Minimum Pads
Dimensions in mm

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

***© 2024 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED***



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000