SAIL-M8BG-4S0.5UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

General ordering data

Version	Bus line, One end without connector, M8, Number of poles: 4, 0.5 m, Female socket, straight, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No
Order No.	1301370050
Type	SAIL-M8BG-4S0.5UIE
GTIN (EAN)	4050118111156
Qty.	1 pc(s).

SAIL-M8BG-4S0.5UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	35 g

Technical specifications for cable

Acceleration	5 m/s²	Bending cycles	5 Mio
Bending radius, min., moving	7.5 x cable diameter	Bending radius, min., stationary	4 x cable diameter
Cable length	0.5 m	Colour coding	blue, orange, white / blue, white / orange
Configurable cable length	No	Core cross-section	0.15 mm²
Halogen	No	Hybrid cable	No
Insulation	PP	Irradiation crosslinked	No
Number of poles	4	Outer cladding in accordance with UL AWM style	20963 (80 °C / 30 V)
Outside diameter	4.8 mm ± 0.3 mm	Resistant to welding beads	No
Sheath material	PUR	Sheathing colour	green
Shielded	Yes	Speed	180 m/s
Suitable for cable carriers	Yes	Temperature range, stationary	-40...80 °C
Welding spark resistance	No		

General technical data

Coding	none	Connection thread	M8
Contact surface	Gold-plated	Housing main material	PUR
LED	No	Plugging cycles	≥ 100
Pollution severity	3	Protection degree	IP67
Rated current	4 A	Rated voltage	30 V
Temperature range of housing	-25...+80 °C	Threaded ring material	Brass, nickel-plated
Tightening torque	M8: 0.5 - 0.6 Nm	Version	Female socket, straight
jumpered	No		

Electrical properties

Rated voltage	30 V

General standards

Certificate no. (cULus)	E307231

Plug, left

Plug left	M8, IP67, female contact, straight, Plastic, shielded

Plug, right

Plug right	free conductor end

Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ETIM 8.0	EC002599	ETIM 9.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08
ECLASS 12.0	27-06-03-08	ECLASS 13.0	27-06-03-08
ECLASS 14.0	27-06-03-08		

SAIL-M8BG-4S0.5UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	e8d8af70-4c85-4483-bc8c-9bc5b598e2a9
RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c

Approvals

Approvals	
ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E307231

Downloads

Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN

SAIL-M8BG-4S0.5UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

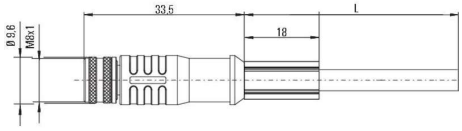

Pin

Pole scheme

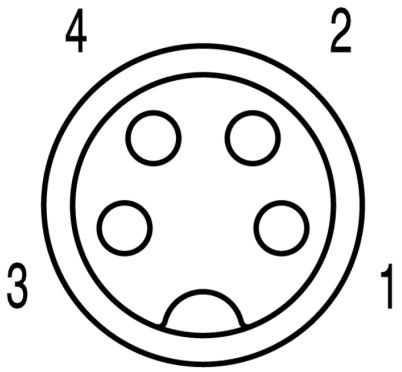

Socket

Wiring diagram

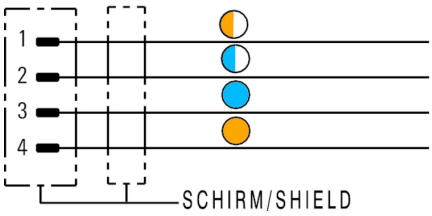

The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F