SAIL-M8BGRJ45-4S0.25UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

General ordering data

Version	Bus line, Connecting line, Number of poles: 4, 0.25 m, Female socket, straight, RJ45, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No
Order No.	1304030025
Type	SAIL-M8BGRJ45-4S0.25UIE
GTIN (EAN)	4050118111262
Qty.	1 pc(s).

SAIL-M8BGRJ45-4S0.25UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	19 g

Technical specifications for cable

Acceleration	5 m/s²	Bending cycles	5 Mio
Bending radius, min., moving	7.5 x cable diameter	Bending radius, min., stationary	4 x cable diameter
Cable length	0.25 m	Colour coding	blue, orange, white / blue, white / orange
Configurable cable length	No	Core cross-section	0.15 mm²
Halogen	No	Hybrid cable	No
Insulation	PP	Irradiation crosslinked	No
Number of poles	4	Outer cladding in accordance with UL AWM style	20963 (80 °C / 30 V)
Outside diameter	4.8 mm ± 0.3 mm	Resistant to welding beads	No
Sheath material	PUR	Sheathing colour	green
Shielded	Yes	Speed	180 m/s
Suitable for cable carriers	Yes	Temperature range, stationary	-40...80 °C
Welding spark resistance	No		

General technical data

Coding	none	Contact surface	Gold-plated
Housing main material	PUR	LED	No
Plugging cycles	≥ 100	Pollution severity	3
Protection degree	IP67	Rated current	4 A
Rated voltage	30 V	Temperature range of housing	-25...+80 °C
Threaded ring material	Brass, nickel-plated	Tightening torque	M8: 0.5 - 0.6 Nm
Version	Female socket, straight, RJ45	jumpered	No

Electrical properties

Rated voltage	30 V

Plug, left

Plug left	RJ45, IP20, male contact, straight, Plastic, shielded

Plug, right

Plug right	M8, IP67, female contact, straight, Plastic, shielded

Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ETIM 8.0	EC002599	ETIM 9.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08
ECLASS 12.0	27-06-03-08	ECLASS 13.0	27-06-03-08
ECLASS 14.0	27-06-03-08		

SAIL-M8BGRJ45-4S0.25UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	e8d8af70-4c85-4483-bc8c-9bc5b598e2a9
RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c

Approvals

Approvals	
ROHS	Conform

Downloads

Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN

SAIL-M8BGRJ45-4S0.25UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

Dimensioned drawing

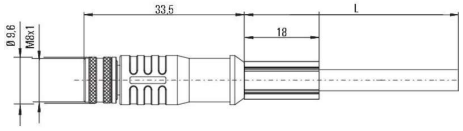

Male, straight

Straight socket

Pole scheme

Pole scheme

Female contact

RJ45

Wiring diagram

The ideal tool: Screwty ® with torque function

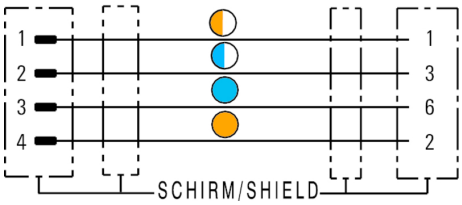

Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F