Innovative Service Around the Globe YAGEO

DATA SHEET

THYRISTOR SURGE SUPPRESSORS MODEMS/LINE CARD

P3500SC-R35

RoHS compliant & Halogen free



Product specification– August 06, 2021 V.1

Thyristor Surge Suppressors (TSS) Data Sheet

Description

DO-214AA Thyristor solid state protection thyristor protect telecommunications equipment such as modems, line cards, fax machines, and other CPE.
P Series devices are used to enable equipment to meet various regulatory requirements including GR 1089, ITU K.20, K.21 and K.45, IEC 60950, UL 60950, and TIA-968 (formerly known as FCC Part 68).



Features

Compared to surge suppression using other technologies, P Series devices offer absolute surge protection regardless of the surge current available and the rate of applied voltage (dv/dt). P Series devices:

- Cannot be damaged by voltage
- Eliminate hysteresis and heat dissipation typically found with clamping devices
- Eliminate voltage overshoot caused by fast-rising transients
- Are non-degenerative
- Will not fatigue
- Have low capacitance, making them ideal for high-speed transmission equipment
- Meets MSL level 1, per J-STD-020

Electrical Parameters

Parameter	Definition
V_{DRM}	**Peak Off-state Voltage –** maximum voltage that can be applied while maintaining off state
V_S	**Switching Voltage –** maximum voltage prior to switching to on state
V_T	**On-state Voltage –** maximum voltage measured at rated on-state current
I_{DRM}	**Leakage Current –** maximum peak off-state current measured at V_{DRM}
I_S	**Switching Current –** maximum current required to switch to on state
I_T	**On-state Current –** maximum rated continuous on-state current
I_H	**Holding Current –** typical current required to maintain on state
C_O	**Off-state Capacitance –** typical capacitance measured in off state
I_{PP}	**Peak Pulse Current –** maximum rated peak impulse current

Electrical Characteristics

Part Number	Type ①	V_{DRM} (V)	V_S (V)	V_T (V)	I_{DRM} (μA)	I_S (mA)	I_T (A)	I_H (mA)	C_O (pF)	V_{PP} 10/700μs (V)	I_{PP} 10/1000μs (A)	Marking
P3500SC	R35	348.5	430	4	5	800	2.2	150	35	6000	100	P35C


Notes:


- All measurements are made at an ambient temperature of 25℃. I_{PP} applies to -40℃ through +85℃ temperature range.
- Off-state capacitance(C_O) is measured at 1 MHz with a 2V bias and is typical value.

Thermal Considerations

Package DO-214AA/SMB	Symbol	Parameter	Value	Unit
	T_J	Operating Junction Temperature	-40 to +125	℃
	T_S	Storage Temperature Range	-40 to +150	℃
	$R_{\theta JA}$	Junction to Ambient on printed circuit	90	℃/W

Part Number Code and Marking

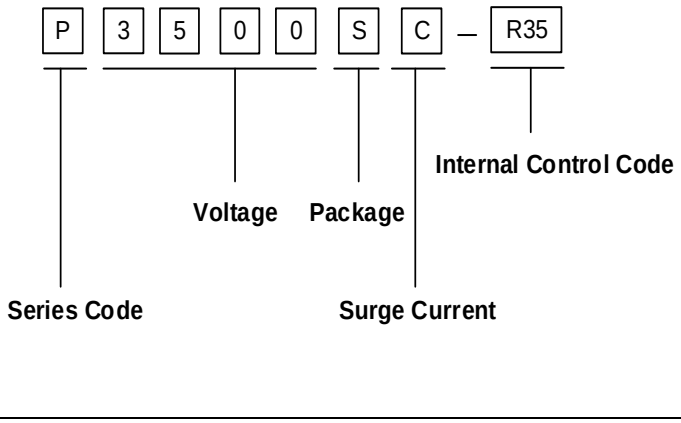

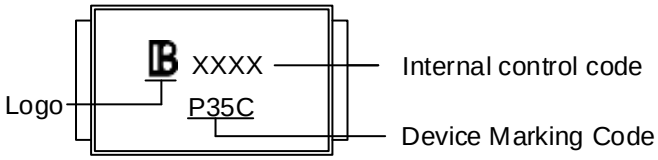

Characteristics Curves

Figure 1. V-I Characteristics

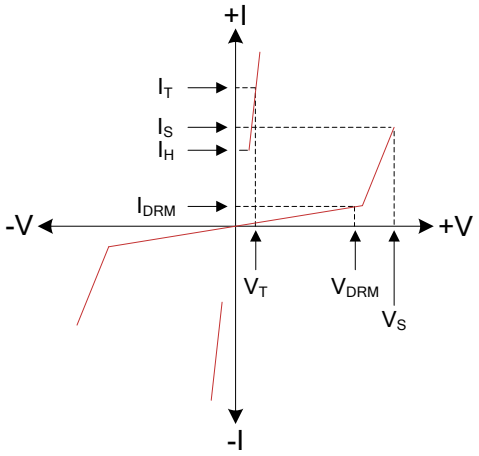


Figure 2. tr × td Pulse Wave-form

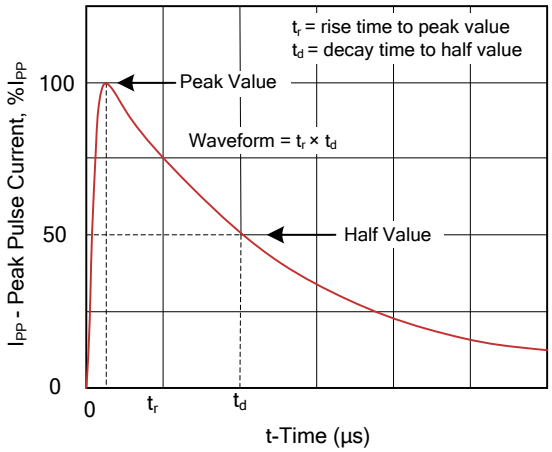


Figure 3. Normalized Vs Change versus Junction Temperature



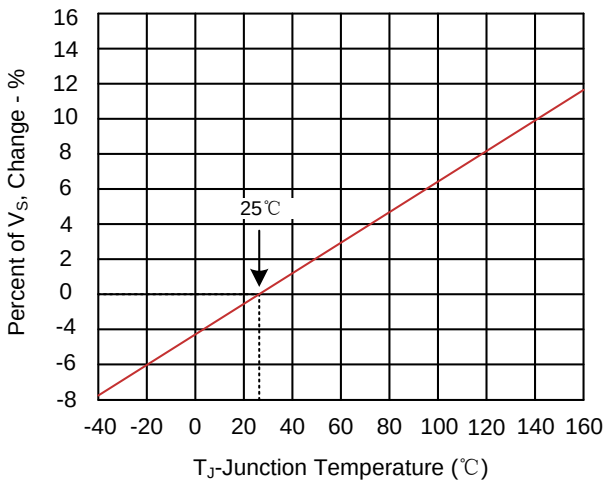


Figure 4. Normalized DC Holding Current versus Case Temperature

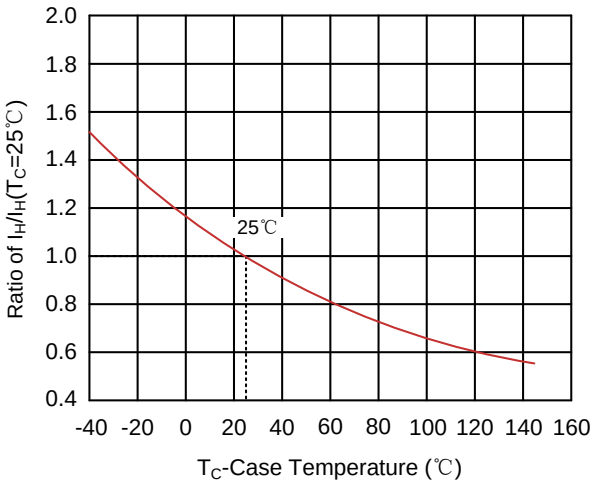

Recommended Soldering Conditions


Reflow Soldering

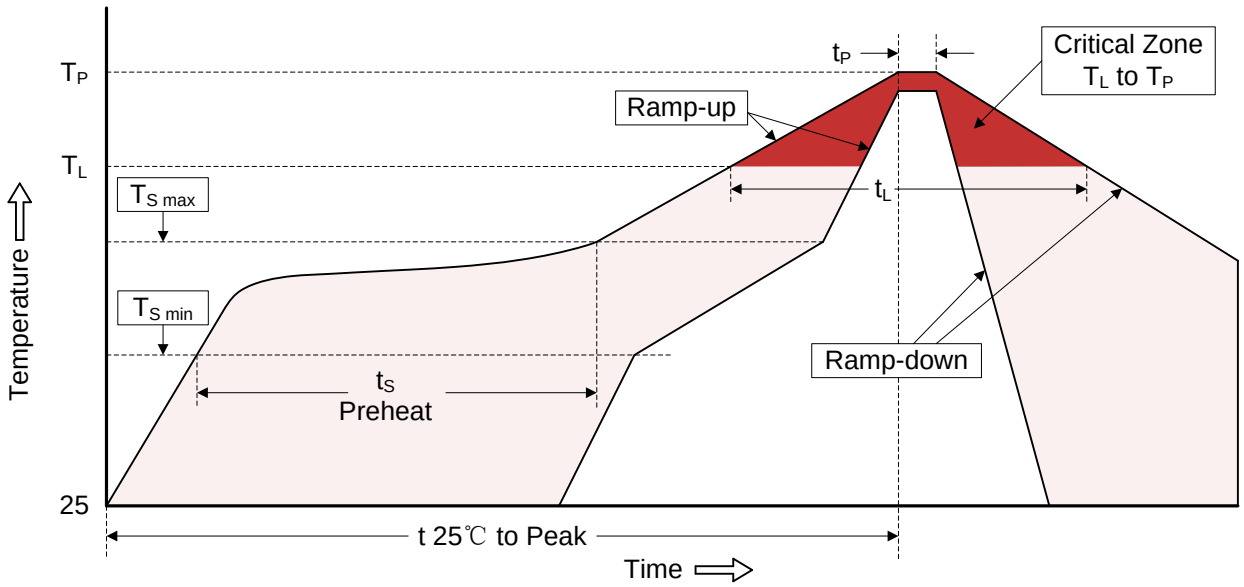

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3℃/second max.
Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) (t_S)	 150℃ 200℃ 60-180 seconds
$T_{S\ max}$ to T_L -Ramp-up Rate	 3℃/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	 217℃ 60-150 seconds
Peak Temperature (T_P)	260℃
Time within 5℃ of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down Rate	6℃/second max.
Time 25℃ to Peak Temperature	8 minutes max.


Dimensions (SMB/DO-214AA)

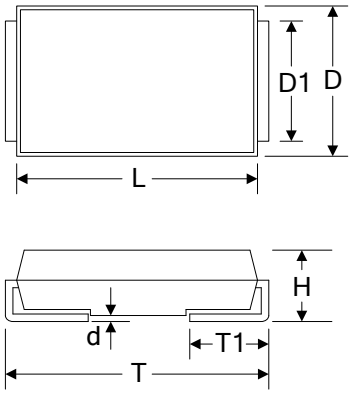

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
L	4.06	4.70	0.160	0.185
D	3.30	3.94	0.130	0.155
D1	1.90	2.20	0.075	0.086
T	5.21	5.59	0.205	0.220
T1	0.76	1.52	0.030	0.060
d	-	0.203	-	0.008
H	1.95	2.65	0.077	0.104


Packaging

Tape

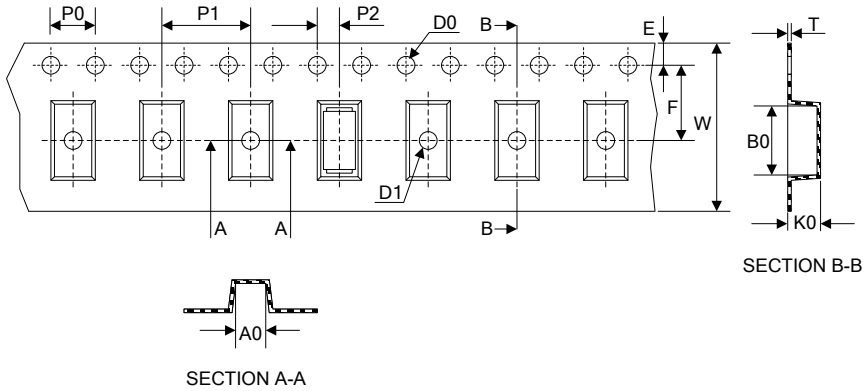

Symbol	Dimension (mm)
W	12.00±0.30
P0	4.00±0.10
P1	8.00±0.10
P2	2.00±0.10
D0	Φ1.55±0.05
D1	Φ1.55±0.05
E	1.75±0.10
F	5.50±0.10
A0	3.76±0.10
B0	5.69±0.10
K0	2.70±0.10
T	0.25±0.10

13〃 Reel

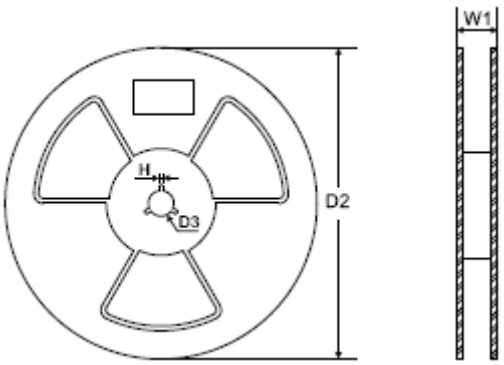

D2	Φ330.0±2.0
D3	Φ13.5±0.5
H	2.5±0.5
W1	16.0±1.0

Quantity: 3000PCS

LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non -infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment , Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.