
DB UNLIMITED


Part Number: SM230332-2	DRAWN CJ	7/21/2021
	CHECKED P.D.	7/28/2021
Description: Dynamic Speaker	APPROVED J.S.	7/28/2021

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

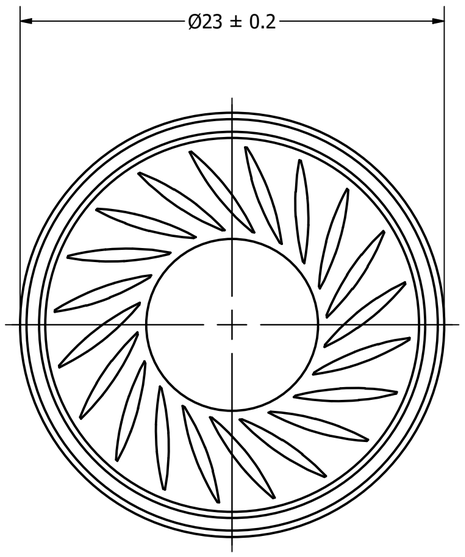

Side View

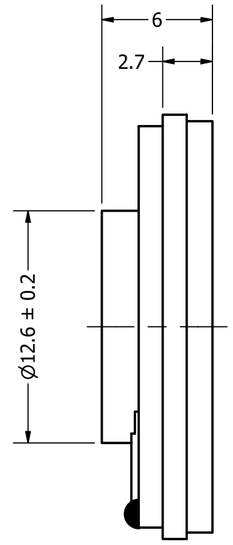

Bottom View

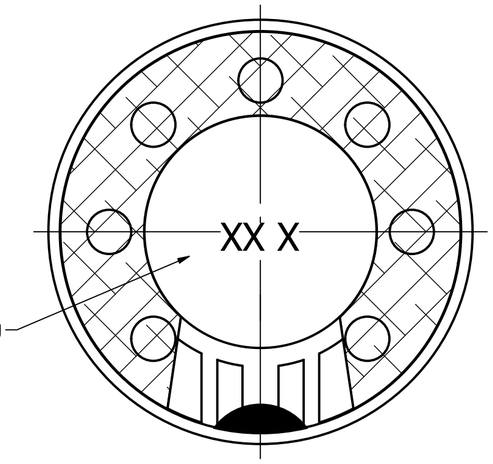

Items	Specifications	Conditions
Sound Pressure Level	97	dB (@ 1W/10cm), Avg.
Resonant Frequency	550	Hz
Frequency Range	550 ~ 20,000	Hz
Nominal Power	80	mW
Max. Power	150	mW
Impedance	32	Ω
Cone Material	Mylar	
Mount Type	Flush Mount	
Storage Temperature	-30 ~ +70	°C
Operating Temperature	-20 ~ +60	°C

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
	Released from Engineering	7/28/2021	J.S.
1	Updated Resonant Frequency and Frequency Range	8/5/2021	L.L.

NOTES

1) All dimensions are in mm unless otherwise noted

2) All tolerances are ± 0.5 mm unless otherwise noted

3) All parts meet RoHS

4) Subject to change or redrawn without notice