
DB UNLIMITED


Part Number:	DRAWN	
SM350508-1	CJ	8/10/2016
	CHECKED P.D.	8/10/2016
Description: Dynamic Speaker	APPROVED J.S.	8/10/2016

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

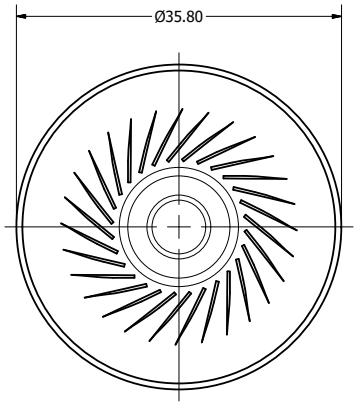

Side View

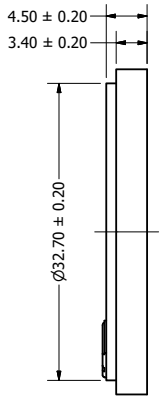

Bottom View

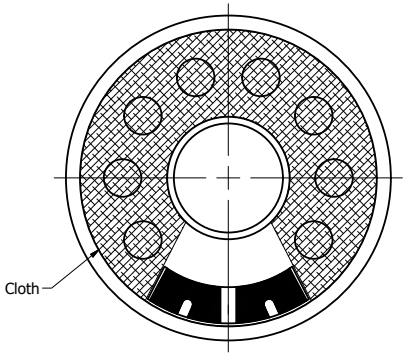

Items	Specifications	Conditions
Sound Pressure Level	89	dB (@ 10cm)
Resonant Frequency	500	Hz
Frequency Range	500 ~ 5,000	Hz
Nominal Power	0.5	W
Max. Power	1	W
Impedance	8	Ω
Cone Material	Mylar	
Mount Type	Flush Mount	
Storage Temperature	-25 ~ +60	℃
Operating Temperature	-25 ~ +60	℃
Weight	8.5	g

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
	Released from Engineering	10/21/2013	J.S.
1	Updated to new template	8/10/2016	J.S.
2	Corrected SPL, resonant frequency,frequency range, operating temp, storage temp, and weight	5/17/2017	C.E.

NOTES

1) All dimensions are in mm unless otherwise noted
2) All tolerances are ± 0.5 mm unless otherwise noted
3) All parts meet RoHS
4) Subject to change or redrawn without notice

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.